




Handmade in New York since 1996.

David Weeks Studio is a design studio based in Brooklyn NY. Founded by designer David Weeks in 1996, the studio is renowned for its large-scale sculptural lighting. We are committed to the act of making, much of the work is made by hand by our talented team of designers, engineers, and artisans. The process marries an artist's sensibility with technical precision. Each fixture is unique and designed to last for generations. We design and produce lighting and products that are highly regarded and sought after by our clients, designers, and architects around the world.



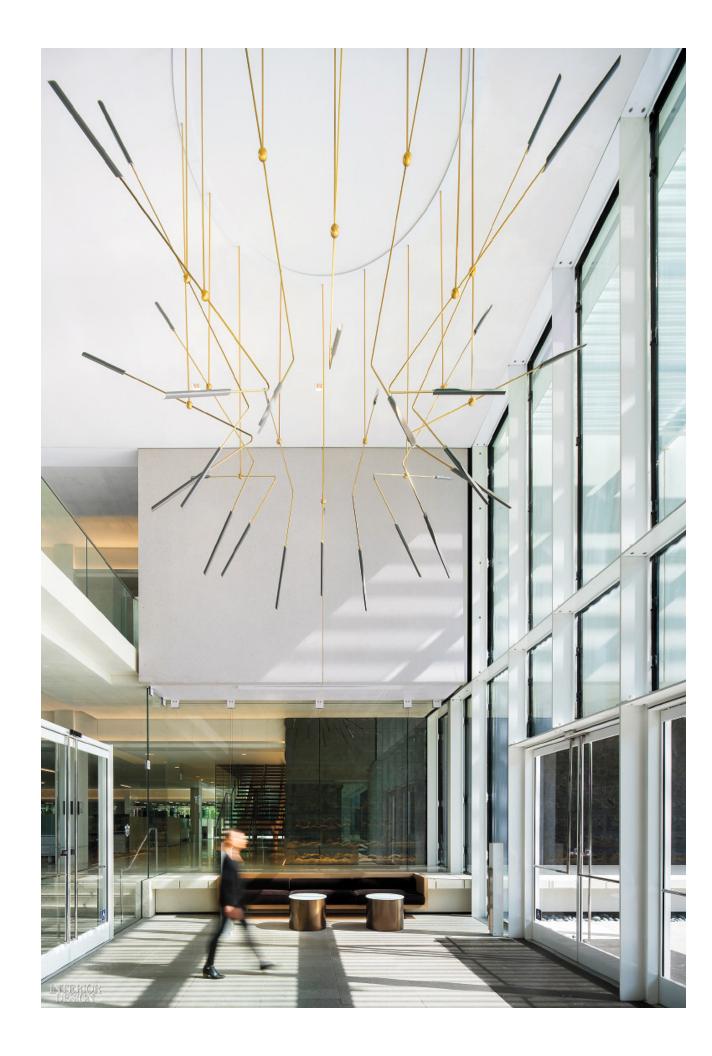

Widely regarded as the founding father of North American lighting design, David Weeks has been a pioneering figure in Brooklyn's burgeoning independent design movement since his studio's early roots in Dumbo. His genre-defining work is the result of a distinctly hands-on, sculptural proces that explores scale and proportion, balance, and movement.



www.davidweeksstudio.com



Precision design, made to measure.

David Weeks Studio works alongside architects, interior designers, and private clients to construct experience and define spaces. Our made-to-order production process allows us to offer customizations on much of our lighting collections. Whether you're looking for unique dimensions or a custom color statement, our team will be happy to guide you through the process and estimate any project. The studio offers a full custom design service that extends beyond the scope of our existing collections.

Meet with our team to learn more about our custom capabilities.





Made slow, shipped quick.

DWS Quickship program offers our best-loved designs, ready to ship and delivered within 2-3 weeks. Quick Ship items are handmade in Brooklyn with the same care as our made-to-order items but feature fixed dimensions in our most requested colors and finishes.



Collections

Boi

Boi Cluster

Hennen

OTTO

Treble

Sarus Torroja

Bottle + Bullet

Shell


Whiplash


Boi Collection

Boi brightens up serious design with an iconic form that gives an ebullient nod to 1960's pop design.
Great in pairs and even better in multiples, it spills light from curved shapes, and casts patterns onto surrounding walls.



No. 209







Select finishes and colors available.



Description

Featuring a small Boi shade with openings at both the top and the bottom, the Boi Sconce allows light to flow through the entirety of the fixture. The shade rotates 320° to cast light directionally.

Materials

Shade: Powder coated steel Wall mount: Powder coated steel Hardware: Plated brass

Mount & Shade Color

- Black Gloss (black gloss interior) Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior) Ivory Satin (ivory satin interior)
- Orange Gloss (ivory satin interior) White Gloss (white gloss interior) White Satin (white satin interior)

Custom colors available.

Hardware

- O Polished Nickel
- Brushed Brass Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: G16.5 globe bulb candelabra base 60W max 220-240V: E14 base golf ball 60W max

Note: Bulbs not included. Halogen bulbs not recommended.

Wattage 60 watts max

Weight 5lb (2.3 kg)

Remarks

UL listed. Hardwired is standard. Custom cord & plug available; length approx 6'. Custom switch available on wall mount.


Indoor use and dry locations only.


Dimensions 9" D x 6" W x 5" H (23 D x 16 W x 13 cm H) Wall mount diameter: 5" (13 cm) Shade: 6" Ø x 5.5" H

(15 Ø x 14 cm H)

Big Boi Sconce

No. 214







Select finishes and colors available.



Description

Featuring a large Boi shade with openings at both the top and the bottom, the Big Boi Sconce allows light to flow through the entirety of the fixture. The shade rotates 320° to cast light directionally.

Materials

Shade: Powder coated steel Wall mount: Powder coated steel Hardware: Plated brass

Mount & Shade Color

- Black Gloss (black gloss interior)Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)Ivory Satin (ivory satin interior)
- Orange Gloss (ivory satin interior)
 White Gloss (white gloss interior)
 White Satin (white satin interior)

Custom colors available.

Hardware

- Polished Nickel
- Brushed BrassOil Rubbed Bronze
- Custom finishes available.

Lamping

120V: A19 or A15 medium base 60W max 220-240V: E27 base 60W max Note: Bulbs not included. Halogen bulbs not recommended.

Wattage

60 watts max

Weight

5 lbs (2.3 kg)

Remarks


UL listed.
Hardwired is standard.
Custom cord & plug available;
length approx 6'.
Custom switch available
on wall mount.
Indoor use and dry locations only.

Dimensions

11" D x 8.25" W x 6.5" H (28 D x 21 W x 17 cm H) Wall mount diameter: 5" (13 cm) Shade: 8.25" Ø x 6.5" H (21 Ø x 17 cm H)

Fenta Table Lamp

No. 121

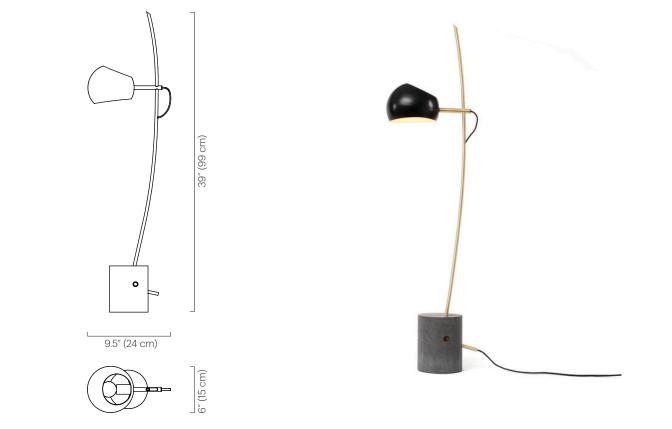

Description

The Fenta Desk Lamp features a cylindrical cement cast base. The hand formed brass arm is secured by a wooden dowel. The Boi shade has two openings casting light both up and down.

Materials

Shade: Powder coated steel Frame: Plated brass Base: Cement Dowel: Hardwood

hade Color

Black Satin (ivory satin interior)
 Grey Gloss (grey gloss interior)
 Near Satin (ivery satin interior)

Ivory Satin (ivory satin interior)White Satin (white satin interior)

Custom colors available.

Base Color Cement

Finish

Brushed Brass

Polished Nickel

Custom finishes available.

Oil Rubbed Bronze

Lamping

120V: G16.5 globe bulb candelabra base 60W max 220-240V: E14 base golf ball 60W max

Note: Bulbs not included. Halogen bulbs not recommended.

Wattage

60 watts max

Weight

10 lbs (4.5 kg)

Remarks

UL listed.
On/Off switch located on cord.
Cord color is black;
length approx. 7 feet.
Fixed shade does not swivel.
Indoor use and dry locations only.

Dimensions

9.5" D x 6" W x 39" H (24 D x 15 W x 99 cm H) Base: 5" Ø x 6" H (13 Ø x 15 cm H) Shade: 6" Ø x 5.5" H (15 Ø x 14 cm H)





The Fenta lamp features a cylindrical

cement cast base. The hand formed

brass arm is secured by a wooden

openings casting light both up and

dowel. The Boi shade has two

Shade: Powder coated steel

Frame: Finished brass Base: Cement

Dowel: Hardwood

down.

Materials

Fenta Standing Lamp

No. 317

13" (33 cm)

Shade Color

Black Satin (ivory satin interior) Grey Gloss (grey gloss interior) Ivory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Base Color Cement

Finish O Polished Nickel

Brushed Brass Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: G16.5 globe bulb candelabra base 60W max 220-240V: E14 base golf ball 60W max

Note: Bulbs not included. Halogen bulbs not recommended.

Wattage 60 watts max

Weight 20 lbs (9 kg)

Remarks

UL listed. Dimmer switch located on cord. Cord color is black; length approx. 10 feet. Fixed shade does not swivel. Indoor use and dry locations only.

TECHNICAL SPECIFICATIONS

Dimensions 13" D x 7.5" W x 70" H (33 D x 19 W x 178 cm H) Base: 6"Ø x 9" H (15 Ø x 23 cm H) Shade: 7.5" Ø x 6" H (19 Ø x 15 cm H)




121 Fenta Table + 317 Fenta Standing Lamp Black Satin + Brushed Brass

418 Custom Boi Tiered Pendant 4 Tier White Satin + Polished Nickel

Boi Tiered Pendant

TECHNICAL SPECIFICATIONS

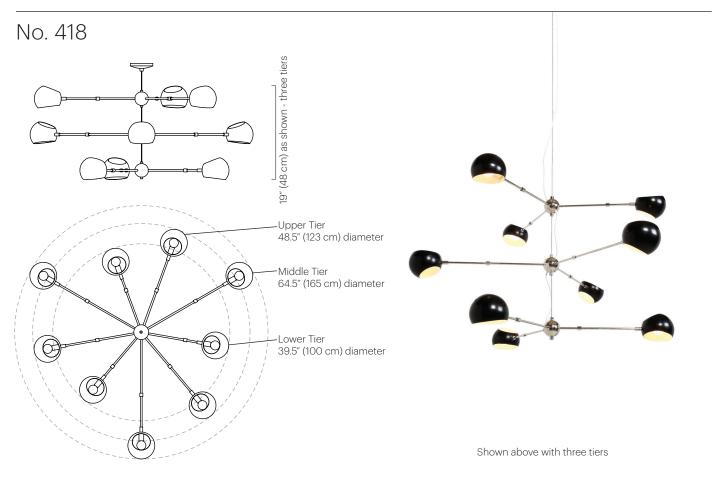

Description

The Boi Tiered Pendant is a highly customizable fixture, offering an expanding number of tiers with varying dimensions. Each tier has three arms made of plated steel and rotating Boi shades with openings at the top and bottom. Shades rotate 320° to cast light directionally.

Materials

Shades: Powder coated steel Ceiling mount: Powder coated steel Frame: Plated steel Hubs: Plated brass Drop: Stainless steel cable

Shade Color

- Black Gloss (black gloss interior)
- Black Satin (ivory satin interior) Grey Gloss (grey gloss interior) Ivory Satin (ivory satin interior)
- Orange Gloss (ivory satin interior) White Gloss (white gloss interior) White Satin (white satin interior)

Custom colors available.

Finish

- O Polished Nickel
- Brushed Brass Oil Rubbed Bronze

Custom finishes available.

Lamping (Three shades per tier)

120V: (3)G16.5 globe bulb candelabra base 60W max 220-240V: (3)E14 base golf ball 60W max

Note: Bulbs not included. Halogen bulbs not recommended.

Wattage

180 watts max per tier

Weight

Weight varies; depending on number of tiers and dimensions. 3-tier fixture: approx. 15 lbs (7 kg)

Remarks

Specify drop length. Approx. 6" of extra cable and cord included. Specify number of tiers. Two tier minimum (six shades). Each tier has three shades. Tiers may be specified with different diameters.

Remarks continued

Ceiling mount consistent with shade color. White electrical cord is standard. Additional weight support recommended for junction box installation. Indoor use and dry locations only.


Dimensions

Tiers are available in four standard diameters: 39.5" / 48.5" / 56.5" / 64.5" (100 cm / 123 cm / 144 cm / 164 cm) or specify custom tier diameters. Min. diameter of tier: 24" (61 cm) Max. diameter of tier: 72" (183 cm) Ceiling mount diameter: 5" (13 cm) Standard distance between tiers: 7" (18 cm) Minimum overall height: Two tiers: 13" (33 cm) Three tiers: 20" (51 cm) Shade: 6" Ø x 5.5" H (15 Ø x 14 cm H)



Boi Oval Pendant

TECHNICAL SPECIFICATIONS

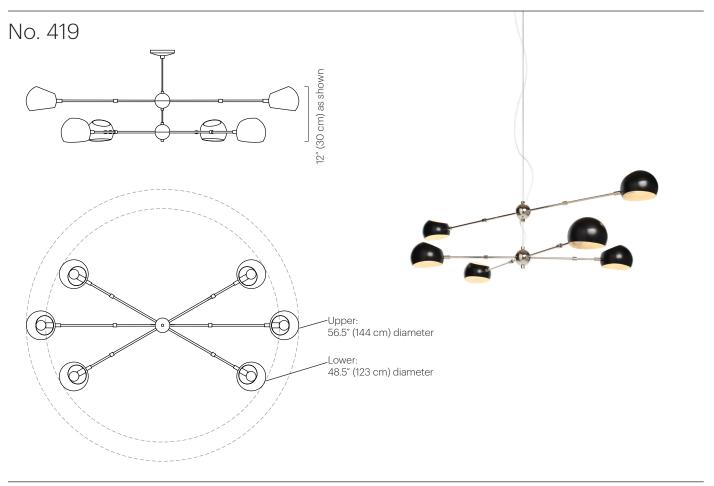

Description

The Boi Oval is a two tier fixture with six shades. The top tier has two shades creating an oval shape when viewed from below. Shades rotate 320° to cast light directionally. Tiers are available in three diameters; they can also be customized to client specifications.

Materials

Shades: Powder coated steel Ceiling mount: Powder coated steel Frame: Plated steel Hubs: Plated brass Drop: Stainless steel cable

Shade Color

 Black Gloss (black gloss interior) Black Satin (ivory satin interior) shades, and the Bottom tier has four Grey Gloss (grey gloss interior) Ivory Satin (ivory satin interior)

Orange Gloss (ivory satin interior) White Gloss (white gloss interior) White Satin (white satin interior)

Custom colors available.

Standard Finish

Polished Nickel Brushed Brass

Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: (6)G16.5 globe bulb candelabra base 60W max 220-240V: (6)E14 base golf ball 60W max

Note: Bulbs not included. Halogen bulbs not recommended.

Wattage

360 watts max

Weight

Approx. 10 lbs (4.5 kg)

Remarks


Specify drop length. Approx. 6" of extra cable and cord included. Only available in two tiers. Specify tier diameter. Ceiling mount color matches specified shade. White electrical cord is standard.

Remarks continued

Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions Available in standard diameters: Upper tier: 48.5" / 56.5" / 64.5" (123 cm / 144 cm / 164 cm) Lower tier: 39.4" / 48.5" / 56.5" / 64.5" (100 cm/ 123 cm/ 144 cm/ 164 cm) or specify custom tier diameters. Min. diameter of tier: 24" (61 cm) Max. diameter of tier: 72" (183 cm) Standard distance between tiers: 7" (18 cm) Ceiling mount diameter: 5" (13 cm) Minimum overall height: 13" (33 cm) Shade: 6" Ø x 5.5" H (15 Ø x 14 cm H)



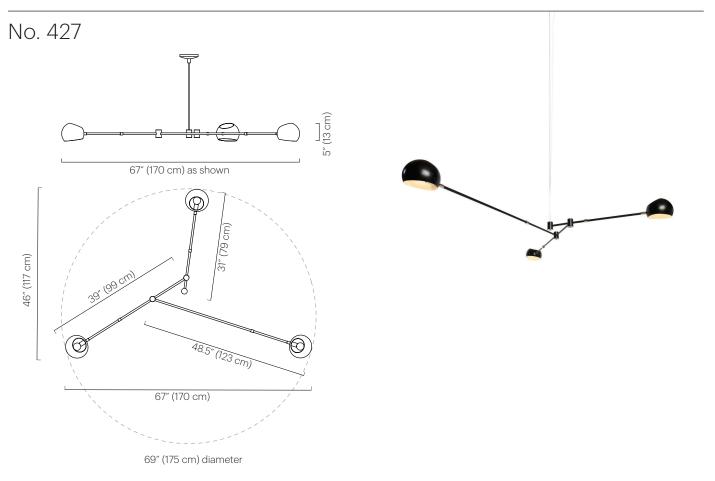

Description

The Boi Pendant Trio is an asymetrical, balanced fixture with a Boi shade extending from each of its three arms. Shades rotate 320° to cast light directionallly.

Materials

Shades: Powder coated steel Frame: Powder coated steel Ceiling mount: Powder coated steel Drop: Stainless steel cable Hardware: Plated steel and brass

Mount, Frame & Shade Color

Black Satin (ivory satin interior) Grey Gloss (grey gloss interior) Ivory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Hardware

Polished Nickel

Brushed Brass Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: (3)G16.5 globe bulb candelabra base 60W max 220-240V: (3)E14 base golf ball 60W max

Note: Bulbs not included. Halogen bulbs not recommended.

Wattage

180 watts max

Weight

10 lbs (4.5 kg)

Remarks

Specify drop length. Approx. 6" of extra cable and cord included. Fixture size cannot be customized. Arm positions are fixed. Ceiling mount consistent with shade color.

Remarks continued


White electrical cord is standard. Hardware includes counterweights, swivels, and caps of hubs. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions

Fixture diameter: 69" (175 cm) Fixture height: 5" (13 cm) Ceiling mount diameter: 5" (13 cm) Arm lengths: 48.5" / 39" / 31" (123 cm / 99 cm / 79 cm) Minimum overall height: 7" (18 cm) Shade: 6" Ø x 5.5" H (15 Ø x 14 cm H)

Boi Pendant Duo

TECHNICAL SPECIFICATIONS

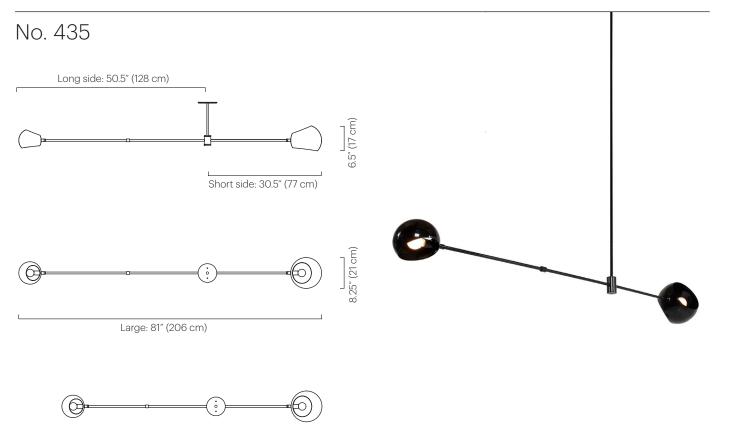

Description The Boi Pendant Duo is an asymmetrical fixture comprised of one large and one small Boi shade. Shades rotate 320° to cast light directionally. The Pendant is offered in two sizes and also works well when installed in multiples.

Materials

Shades: Powder coated steel Frame: Powder coated steel Ceiling mount: Powder coated steel Drop: Powder coated steel

Mount, Frame & Shade Color

 Black Gloss (black gloss interior) Grey Gloss (grey gloss interior) White Gloss (white gloss interior)

Custom colors available.

Small: 67" (170 cm)

Lamping 120V: (1)A19 or A15 medium base

bulb and (1)G16.5 globe candelabra base bulb 60W max 220-240V: (1)E27 base 60W max and (1)E14 base golf ball 60W max Note: Bulbs not included. Halogen bulbs not recommended.

Wattage

120 watts max

Weight

10 lbs (4.5 kg)

Remarks

Specify drop length. Fixed drop not adjustable on site. Specify fixture length. Additional weight support recommended for junction box installation. Indoor use and dry locations only. Specify number of tiers.

DimensionsFixture length options: Large: 81" (206 cm) Small: 67" (170 cm) Arm lengths from balance point: Large: long side: 50.5" (128 cm) / short side: 30.5" (77 cm) Small: long side: 43" (109 cm) / short side: 24" (61 cm) Ceiling mount diameter: 5" (13 cm) Minimum overall height: 6" (15 cm) Small shade: 6" Ø x 5.5" H (15 Ø x 14 cm H) Large Shade: 8.25" Ø x 6.5" H (21 Ø x 17 cm H)





Boi Cluster Collection

The Boi Cluster Collection arranges multiples in an energetic burst of expression. A dynamic arrangement of Boi shades creates a sculptural form that is at once both playful and timeless.

Kopra Standing Lamp

No. 316

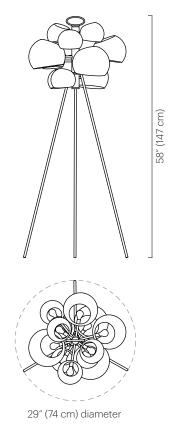

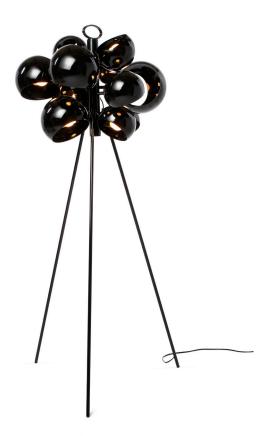

Description

The Kopra Standing lamp features eleven Boi shades of various sizes on a three legged frame topped with an oval handle. Each shade rotates 320° to cast light directionally.

Materials

Shades: Powder coated steel Frame: Powder coated steel

Frame & Shade Color

- Black Gloss (black gloss interior) Grey Gloss (grey gloss interior) White Gloss (white gloss interior)

Custom colors available.

Lamping

120V: (11)G16.5 globe bulb, candelabra base 40W max, 20W recommended 220-240V: (11)E14 base golf ball 40W max, 20W recommended Note: Bulbs not included. Halogen bulbs not recommended.

Wattage

440 watts max

Weight 25 lbs (11.3 kg)

Remarks

Not UL listed. Dimmer switch located on cord. Cord color is black; length approx. 10 feet. Indoor use & dry locations only.

Dimensions

Approx diameter: 29" (74 cm) Height: 58" (147 cm)





316 Kopra Short Standing + Kopra Standing Lamp Black Gloss

Kopra Short Standing Lamp

TECHNICAL SPECIFICATIONS

No. 316







24" (61 cm) approx diameter

Description

The Kopra Short Standing lamp features eleven Boi shades of various sizes on a three legged frame topped with an oval handle. Each shade rotates 320° to cast light directionally.

Materials

Shades: Powder coated steel Frame: Powder coated steel

Frame & Shade Color

- Black Gloss (black gloss interior) Grey Gloss (grey gloss interior) White Gloss (white gloss interior)
- Custom colors available.

Lamping

120V: (11) G16.5 globe bulbs candelabra base 40W max, 20W recommended 220-240V: (11) E14 base golf ball 40W max 20W recommended Note: Bulbs not included. Halogen bulbs not recommended.

Wattage

440 watts max

Weight 20 lbs (9 kg)


Remarks

Not UL listed. Dimmer switch located on cord. Cord color is black; length approx. 7 feet. Indoor use and dry locations only.

Dimensions

Approx diameter: 24" (61 cm) Height: 22.5" (57 cm)



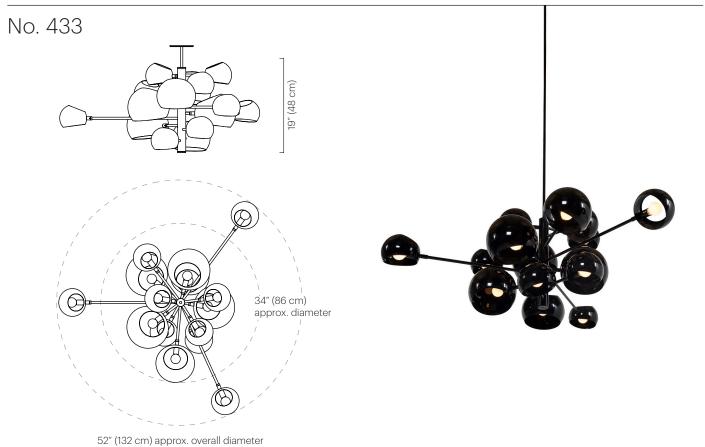

Description

The Kopra Burst is a balanced fixture Black Gloss (black gloss interior) comprised of fifteen Boi shades of various sizes. The fixture is available fully powder coated or with a plated frame and powder coated shades. Each shade rotates 320° to cast light directionally.

Materials

Shades: Powder coated steel Frame: Powder coated or plated steel Ceiling mount: Powder coated steel Drop: Powder coated or plated steel

Mount & Shade Color

Grey Gloss (grey gloss interior) White Gloss (white gloss interior)

Brushed Brass O Polished Nickel

Oil Rubbed Bronze

Black Gloss Grey Gloss White Gloss

Custom colors and finishes available.

Lamping

120V: (15)G16.5 globe bulb candelabra base 40W max, 20W recommended 220-240V: (15)E14 base golf ball 40W max Note: Bulbs not included. Halogen bulbs not recommended.

Wattage 600 watts max

Weight 25 lbs (11.3 kg)


Remarks


Specify drop length.
Fixed drop not adjustable on site. Arm lengths are fixed. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions

Approx diameter: 52" (132 cm) Ceiling mount diameter: 5" (13 cm) Minimum overall height: 22" (56 cm)









24" (61 cm) approx. diameter

Description

The Kopra Pendant is a balanced fixture comprised of eleven Boi shades of various sizes. The fixture is available fully powder coated or with a plated frame and powder coated shades. Each shade rotates 320° to cast light directionally.

Materials

Shades: Powder coated steel Frame: Powder coated or plated steel Ceiling mount: Powder coated steel Drop: Powder coated or plated steel

Mount & Shade Color

 Black Gloss (black gloss interior) Grey Gloss (grey gloss interior) White Gloss (white gloss interior)

Frame

Brushed Brass
Polished Nickel

Oil Rubbed Bronze Black Gloss

Grey Gloss O White Gloss

Custom colors and finishes available.

Lamping

120V: (11)G16.5 globe bulb candelabra base 40W max, 20W recommended 220-240V: (11)E14 base golf ball 40W max Note: Bulbs not included. Halogen bulbs not recommended.

Wattage 440 watts max

Weight 20 lbs (9 kg)


Remarks

Specify drop length. Fixed drop not adjustable on site. Arm lengths are fixed. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions


Approx diameter: 24" (61 cm) Ceiling mount diameter: 5" (13 cm) Minimum overall height: 19" (48 cm)



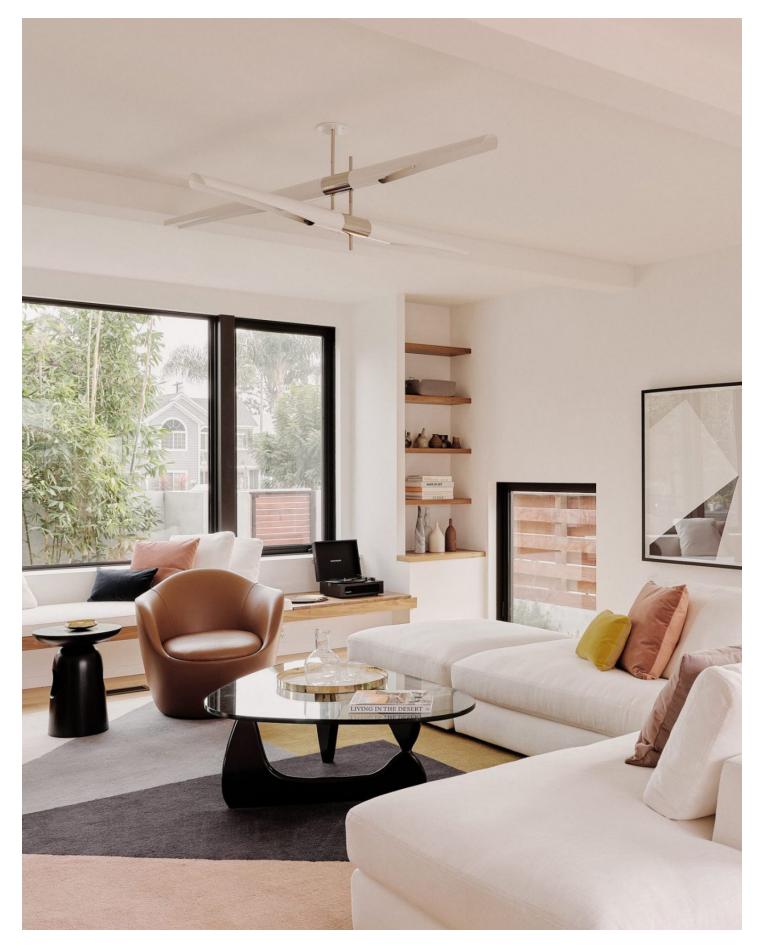

Hennen Mobile

TECHNICAL SPECIFICATIONS

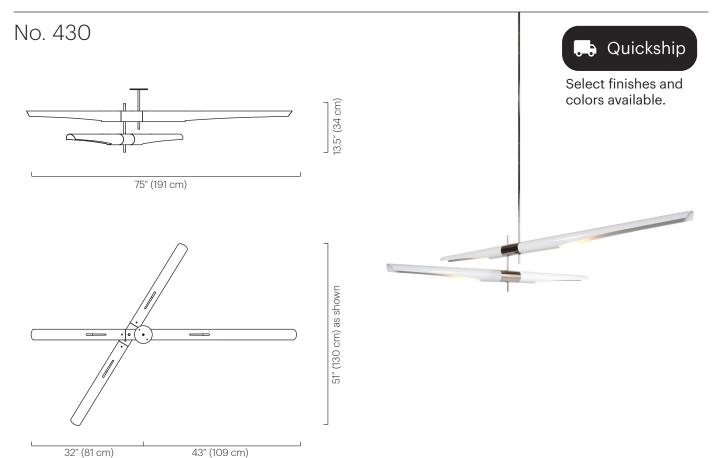

Description

The Hennen Mobile is a balanced fixture comprised of two offset tiers with a total of three short and one long shade that can be set to cast light up or down. Tiers scissor open when installed and arrangement is adjustable on site.

Materials

Shades: Powder coated aluminum Frame: Plated steel & aluminum Ceiling mount: Powder coated steel Drop: Plated steel

Shade Color

White Gloss (white gloss interior)Black Gloss (black gloss interior)Grey Gloss (grey gloss interior)

Custom colors available.

Finish

Polished NickelBrushed Brass

Oil Rubbed Bronze

Custom colors available.

Lamping

120V: (4)T10 incandescent tubular medium base 60W max 220-240V: (4)E27 base (tubular 32mm suggested) 60W max Note: Bulbs not included. Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request) 110-120V~/ 6W/ 420 lm/ 3000K T38, E26 3.7" L x 4.7" Ø ETL

Wattage

240 watts max

Weight

15 lbs (6.8 kg)

Remarks


Specify drop length.
Fixed drop not adjustable on site.
Tier lengths cannot be customized.
Ceiling mount consistent
with shade color.
Additional weight support
recommended for junction
box installation.
Indoor use and dry locations only.

Dimensions

Upper tier: 75" (191 cm)
Lower tier: 59" (150 cm)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height:
14.5" (37 cm)
Long shade: 3" Ø x 42" L
(8 Ø x 107 cm L)
Short shade: 3" Ø x 26.5" L
(8 Ø x 67 cm L)

Hennen Pendant

TECHNICAL SPECIFICATIONS

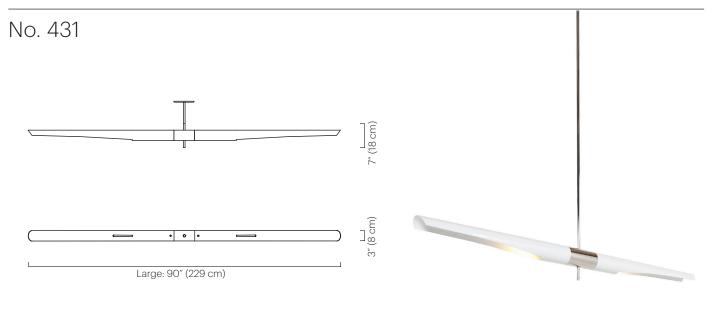

Description

The Hennen Pendant is comprised of two shades suspended from a central drop. The Solo is offered in two sizes, each shade can be set to cast light up or down. This fixture also works well when installed in multiples.

Materials

Shades: Powder coated aluminum Frame: Plated steel & aluminum Ceiling mount: Powder coated steel Drop: Plated steel

Shade Color

○ White Gloss (white gloss interior) Black Gloss (black gloss interior) Grey Gloss (grey gloss interior)

Custom colors available.

Finish

Small: 59" (150 cm)

O Polished Nickel Brushed Brass

Oil Rubbed Bronze

Custom colors available.

Lamping

120V: (2)T10 incandescent tubular medium base 60W max 220-240V: (2)E27 base (tubular 32mm suggested) 60W max Note: Bulbs not included. Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request) 110-120V~/ 6W/ 420 lm/ 3000K T38, E26 3.7" L x 4.7" ø ETL

Wattage 120 watts max

Weight

10 lbs (4.5 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site. Specify fixture length. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions

Fixture length options: Large: 90" (229 cm) Small: 59" (150 cm) Ceiling mount diameter: 5" (13 cm)
Minimum overall height: 8" (20 cm)
Long shade: 3" Ø x 42" L
(8 Ø x 107 cm L)
Short shade: 3" Ø x 26.5" L (8 Ø x 67 cm L)







Hennen Cross

No. 432

TECHNICAL SPECIFICATIONS



90" (229 cm) as shown





Shown above with 2 tiers

Description

The Hennen Cross is a fixture comprised of two or more tiers on a central axis. Tiers are configured with large or small shades that can be set to cast light up or down. Tiers scissor open and are adjustable on site

Materials

Shades: Powder coated aluminum Frame: Plated steel & aluminum Ceiling mount: Powder coated steel Drop: Plated steel

Shade Color

White Gloss (white gloss interior) Black Gloss (black gloss interior) Grey Gloss (grey gloss interior)

Custom colors available.

Finish

O Polished Nickel Brushed Brass

Oil Rubbed Bronze

Custom colors available.

Lamping (Two shades per tier)

120V: (2)T10 tubular incandescent medium base 60W max 220-240V: (2)E27 base (tubular 32mm suggested) 60W max Note: Bulbs not included. Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request) 110-120V~/ 6W/ 420 lm/ 3000K T38, E26 3.7" L x 4.7" ø ETL

Wattage

120 watts max per tier

Weight varies; depending on number of tiers and dimensions. 2-tier fixture: approx 15 lbs (7 kg)

Remarks


Specify drop length. Fixed drop not adjustable on site. Specify number of tiers. Two tier minimum (four shades). Each tier has two shades. Specify tier lengths. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions

Tier length options: Large tier: 90" (229 cm) Small tier: 59" (150 cm) Ceiling mount diameter: 5" (13 cm) Minimum overall height: Two tier: 14.5" (37 cm) Three tier: 21.25" (54 cm) Long shade: 3"Ø x 42" L



No. 215

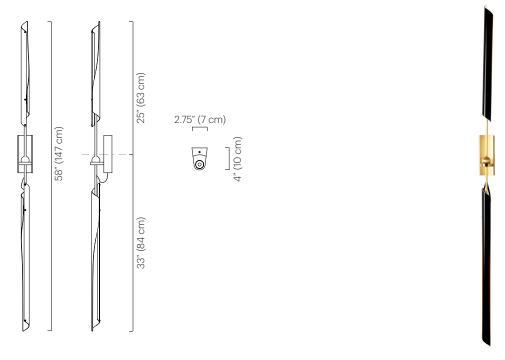

Description

The OTTO Sconce is comprised of two different sized OTTO shades mounted on opposite ends of the arm. Each shade contains a dimmable LED source and rotates 300° to cast light directionally. Available in three sizes.

Materials

Shade: Powder coated aluminum Wall mount: Plated brass Frame: Plated brass Hardware: Plated and polished brass

Shade Color

- Black Satin (ivory satin interior)
 Grey Gloss (ivory satin interior)
 Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Brushed BrassPolished Nickel
- Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K Lumens: 1340 (equivalent to two 60W incandescent bulbs) CRI: 80+

LED power source: 40W 24V phase dimmable class 2 50,000 LED life hours (approx.)

Power Supply

60W 24V For 120V areas: dimmable Class 2 included in canopy. For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

Voltage / Wattage 24 v / 22 watts

2-1 V / 22 Watto

Weight

10 lbs (4.5 kg)

Remarks


ADA compliant depth.
Hardwired is standard.
Black exterior electrical cord is standard.
Custom arm length available
45" - 88" (114 - 224 cm)
Hardware finish consistent with frame finish.
Indoor use and dry locations only.
Wall mount designed to fit
2" x 4" vertical switch box only.

Dimensions

4" D x 2.75" W x 58" H
(10 D x 7 W x 147 cm H)
Bracket: 4" D x 2.75" W x 7" H
(10 D x 7 W x 18 cm H)
Top shade: 1.5" Ø x 20" L
(4 Ø x 51 cm L)
Bottom shade: 1.5" Ø x 28" L
(4 Ø x 71 cm L)

No. 438



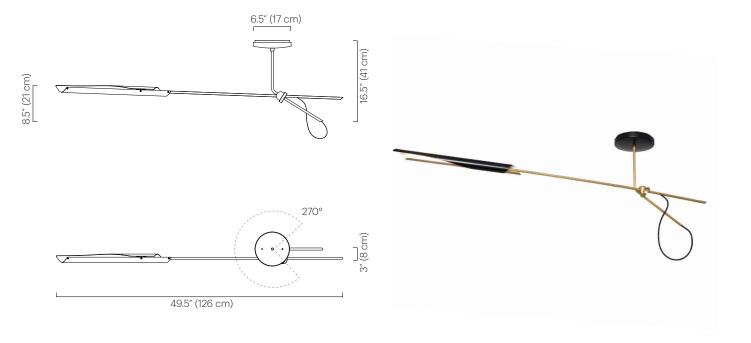

Description

The OTTO Loop Pendant is a lower profile version of our OTTO One Arm fixture featuring a single cantilevered arm. The OTTO shade contains a dimmable LED source and rotates 300° to cast light directionally. The fixture can rotate 270° from the canopy.

Materials

Shade: Powder coated aluminum Ceiling mount: Powder coated aluminum and steel. Frame: Plated brass Drop: Plated brass Hardware: Plated and polished brass

Shade Color

Black Satin (ivory satin interior) Grey Gloss (ivory satin interior) Ivory Satin (ivory satin interior) ○ White Satin (white satin interior)

Custom colors available.

Finish

Brushed Brass Polished Nickel Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K Lumens: 840 (equivalent to one 60W incandescent bulb) CRI: 80+ 50,000 LED life hours (approx.)

Power Supply

60W 24V For 120V areas: dimmable Class 2 included in canopy. For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility ELV Dimmer compatible

Voltage / Wattage 24V /12W


Weight

5 lbs (2.3 kg)

Remarks Drop height is set at 16.5" (41 cm).

Fixed drop not adjustable on site. Arm length fixed. Not for use on sloped ceilings. Black exterior electrical cord is standard. Hardware finish consistent with frame finish. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.


Dimensions 49.5" L x 16.5" H x 3" W (126 L x 41 H x 8 cm W) Canopy mount: 6.5" Ø x 1.25" H (17 Ø x 3 cm H) Shade: 1.5" Ø x 20" L (4 Ø x 51 cm L)

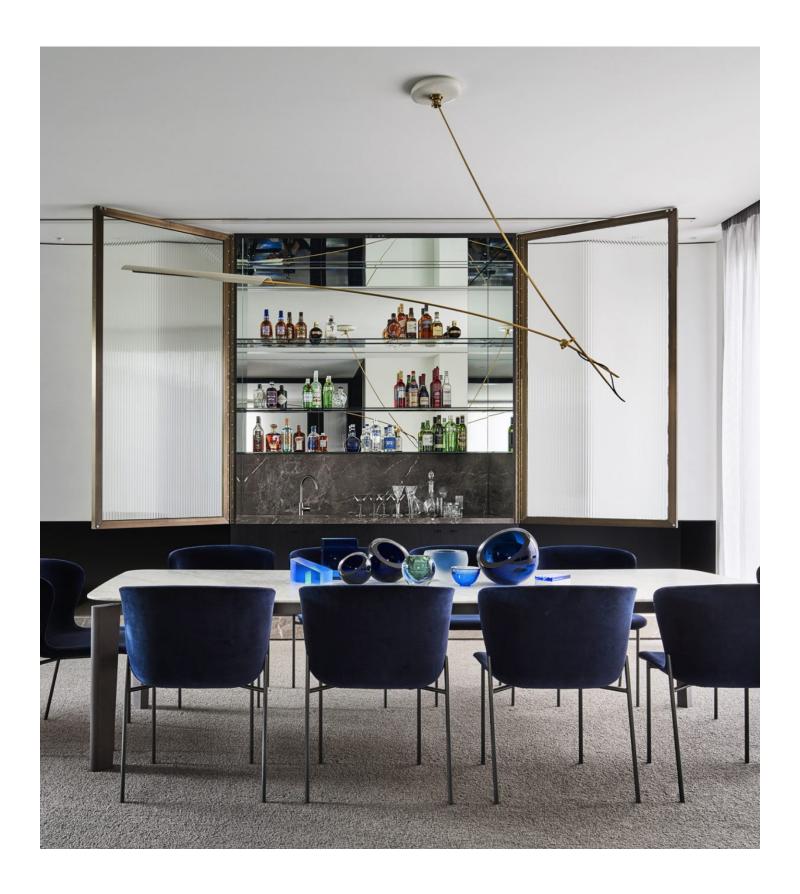


OTTO Pendant

TECHNICAL SPECIFICATIONS









The OTTO Pendant features a single cantilevered arm extending from a drop. The naturally occurring arcs of the fixture will vary depending on the length of the drop. The OTTO shade contains a dimmable LED source and rotates 300° to cast light directionally. The fixture can rotate 245°from the canopy.

Materials

Shade: Powder coated aluminum Ceiling mount: Powder coated and plated aluminum Frame: Plated brass Drop: Plated brass Hardware: Plated and polished brass

Shade Color

Black Satin (ivory satin interior) Grey Gloss (ivory satin interior) Ivory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Brushed Brass Polished Nickel Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K Lumens: 840 (equivalent to one 60W incandescent bulb) 50,000 LED life hours (approx.)

Power Supply

60W 24V For 120V areas: dimmable Class 2 included in canopy. For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

Voltage / Wattage 24V / 11 watts

5 lbs (2.3 kg)

Remarks

Specify drop length. Fixed drop not adjustable on site. Arm length is fixed. Not for use on sloped ceilings. Black exterior electrical cord is standard.


Remarks continued

Hardware finish consistent with frame finish. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions 3" D x 86" W x 21" H (8 D x 218 W x 53 cm H) Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H) Shade: 1.5" Ø x 28" L (4 Ø x 71 cm L) Min overall height: 27.5" (70 cm) Max overall height: 135.5" (344 cm)

OTTO Two Arm Pendant

TECHNICAL SPECIFICATIONS

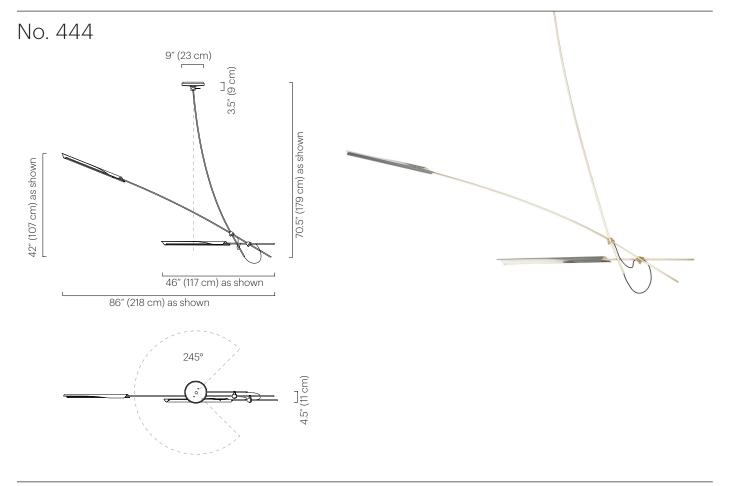

Description

The OTTO Two Arm features two arms extending from a drop. The naturally occurring arcs of the fixture will vary depending on the length of the drop. The OTTO shade contains a dimmable LED source and rotates 300° to cast light directionally. The fixture can rotate 245° from the canopy.

Materials

Shade: Powder coated aluminum Ceiling mount: Powder coated and plated aluminum Frame: Plated brass Drop: Plated brass Hardware: Plated and polished brass

Shade Color

Black Satin (ivory satin interior) Grey Gloss (ivory satin interior) Ivory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Finish

Brushed Brass Polished Nickel Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K Lumens: 1680 (equivalent to two 60W incandescent bulbs) CRI: 80+ 50,000 LED life hours (approx.)

Power Supply

60W 24V For 120V areas: dimmable Class 2 included in canopy. For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

Voltage / Wattage 24V / 22 watts

Weight

5 lbs (2.3 kg)

Remarks

Specify drop length. Fixed drop not adjustable on site. Arm length is fixed. Not for use on sloped ceilings. Black exterior electrical cord is standard.


Remarks continued

Hardware finish consistent with frame finish. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions

4.5" D x 86" W x 42" H (11 D x 218 W x 107 cm H) Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H) Shades: 1.5" Ø x 28" L (4 Ø x 71 cm L) Min overall height: 34.5" (88 cm) Max overall height: 132.5" (336.5 cm)



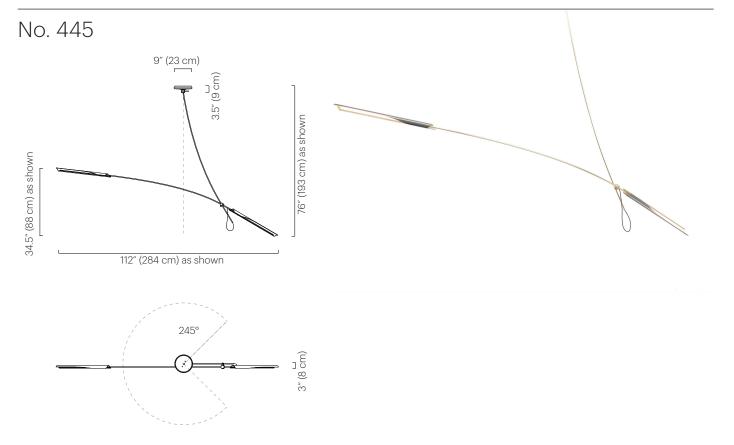

The OTTO Pendant Duo features one Black Satin (ivory satin interior) arm with a shade on either end extending from a customizable drop. The naturally occurring arcs of the fixture will vary depending on the length of the drop. The OTTO shades contain a dimmable LED source and rotate 300° to cast light directionally. The fixture can rotate 245° from the canopy.

Materials

Shade: Powder coated aluminum Ceiling mount: Powder coated and plated aluminum Frame: Plated brass Drop: Plated brass Hardware: Plated and polished brass

Shade Color

Grey Gloss (ivory satin interior) Nory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Finish

Brushed Brass Polished Nickel

Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K Lumens: 1680 (equivalent to two 60W incandescent bulbs) 50,000 LED life hours (approx.)

Power Supply

60W 24V For 120V areas: dimmable Class 2 included in canopy. For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

Voltage / Wattage

24V / 22 watts

Weight 5 lbs (2.3 kg)

Remarks

Specify drop length. Fixed drop not adjustable on site. Arm length is fixed. Not for use on sloped ceilings. Black exterior electrical cord is standard.

Remarks continued


Hardware finish consistent with frame finish. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions

3" D x 112" W x 34.5" H (8 D x 284 W x 88 cm H) Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H) Shades: 1.5" Ø x 28" L (4 Ø x 71 cm L) Min overall height: 37.5" (95 cm) Max overall height: 134.5" (342 cm)

OTTO L Pendant

TECHNICAL SPECIFICATIONS

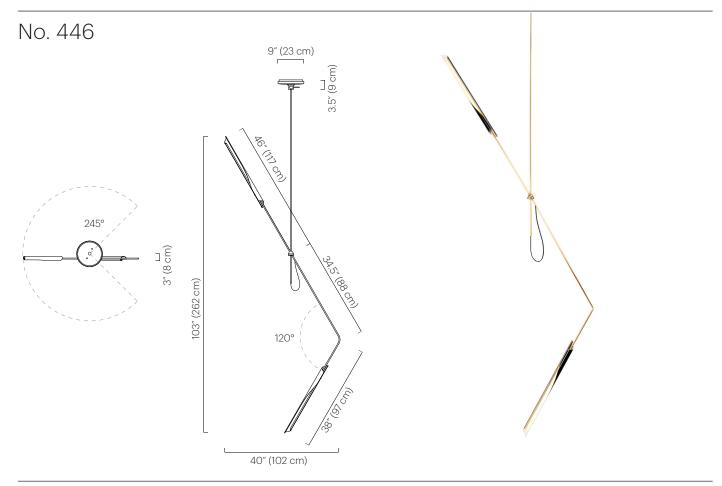

Description

The OTTO L features one bent arm with an OTTO shade on each end. The OTTO shade contains a dimmable LED source and rotates 300° to cast light directionally. The fixture can rotate 245° from the canopy. Fixture is balanced by design; angle is not adjustable.

Materials

Shade: Powder coated aluminum Ceiling mount: Powder coated and plated aluminum Frame: Plated brass Drop: Plated brass Hardware: Plated and polished brass

Shade Color

Black Satin (ivory satin interior) Grey Gloss (ivory satin interior) Vory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Finish

Brushed Brass Polished Nickel

Custom finishes available.

Lamping

60W 24V

included in canopy.

LED: Warm white 2700K Lumens: 1680 (equivalent to two 60W incandescent bulbs) CRI: 80+ 50,000 LED life hours (approx.)

For 120V areas: dimmable Class 2

power supply only. Not included.

For 220-240V areas: remote

Dimmer CompatibilityDimmable with MLV/TRIAC

(leading edge) switch

Voltage / Wattage 24V / 22 watts

Weight 5 lbs (2.3 kg)

Power Supply

Specify drop length. Fixed drop not adjustable on site.
Arm length is fixed. Not for use on sloped ceilings. Black exterior electrical cord is standard. Hardware finish consistent with frame finish. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only. Specify number of tiers


Remarks

Dimensions 3" D x 40" W x 103" H (8 D x 102 W x 262 cm H) Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H) Shades: 1.5" Ø x 28" L (4 Ø x 71 cm L) Min overall height: 109" (277 cm)



OTTO LS Pendant

TECHNICAL SPECIFICATIONS

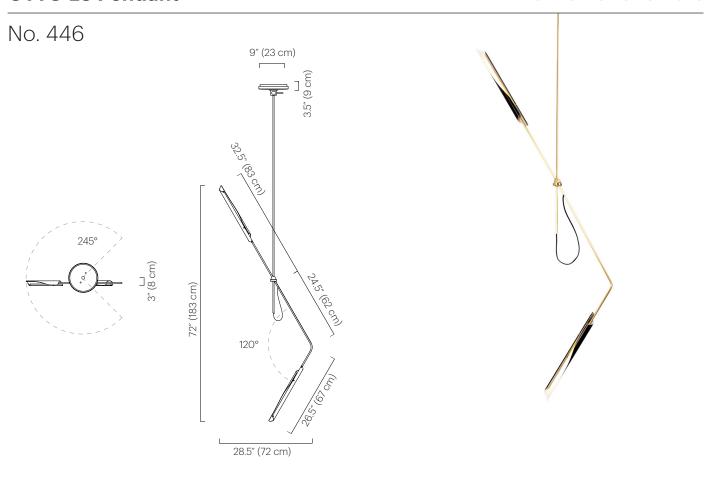

Description

The OTTO LS features one bent arm with an OTTO shade on each end. The OTTO shades contain a dimmable LED source and rotate 300° to cast light directionally. The fixture can rotate 245° from the canopy. Fixture is balanced by design; angle is not adjustable.

Materials

Shade: Powder coated aluminum Ceiling mount: Powder coated and plated aluminum Frame: Plated brass Drop: Plated brass Hardware: Plated and polished brass

Shade Color

Black Satin (ivory satin interior) Grey Gloss (ivory satin interior) Vory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Finish

Brushed Brass Polished Nickel Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K Lumens: 1000 (equivalent to two 40W incandescent bulbs) CRI: 80+ 50,000 LED life hours (approx.)

Power Supply

60W 24V For 120V areas: dimmable Class 2 included in canopy. For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility Dimmable with MLV/TRIAC

(leading edge) switch

Voltage / Wattage 24V / 22 watts

Weight 5 lbs (2.3 kg)

Specify drop length.

Fixed drop not adjustable on site. Arm length is fixed. Not for use on sloped ceilings. Black exterior electrical cord is standard. Hardware finish consistent with frame finish. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only. Specify number of tiers


Dimensions

3" D x 28.5" W x 72" H (8 D x 72 W x 183 cm H) Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H) Shades: 1.5" Ø x 20" L (4 Ø x 51 cm L) Min overall height: 78" (198 cm)

OTTO V Pendant

TECHNICAL SPECIFICATIONS



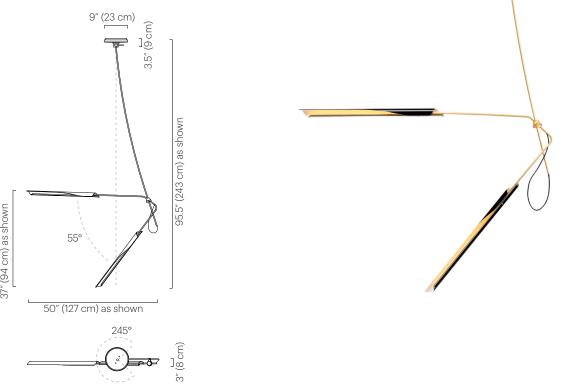

Description

The OTTO V features one bent arm with an OTTO shade on each end. The naturally occurring arc of the drop will vary depending on the length. Fixture is balanced by design; arm angles are not adjustable. The OTTO shades contain a dimmable LED source and rotate 300° to cast light directionally. The fixture can rotate 245° from the canopy.

Materials

Shade: Powder coated aluminum Ceiling mount: Powder coated and plated aluminum Frame: Plated brass Drop: Plated brass Hardware: Plated and polished brass

Shade Color

Black Satin (ivory satin interior) Grey Gloss (ivory satin interior) Ivory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Finish

Brushed Brass Polished Nickel

Oil Rubbed Bronze Custom finishes available.

Lamping

LED: Warm white 2700K Lumens: 1680 (equivalent to two 60W incandescent bulbs) CRI: 80+ 50,000 LED life hours (approx.)

Power Supply

60W 24V For 120V areas: dimmable Class 2 included in canopy. For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

Voltage / Wattage 24V / 22 watts

Weight 5 lbs (2.3 kg)

Remarks

Specify drop length. Fixed drop not adjustable on site. Arm length is fixed. Not for use on sloped ceilings. Black exterior electrical cord is standard.


Remarks continued

Hardware finish consistent with frame finish. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions

3" D x 50" W x 37" H (8 D x 127 W x 94 cm H) Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H) Shade: 1.5" Ø x 28" L (4 Ø x 71 cm L) Min overall height: 42.5" (108 cm) Max overall height: 131.5" (334 cm)







Description

The OTTO X features two intersecting arms with an OTTO shade on each end extending from a drop. The naturally occurring arcs of the fixture will vary depending on the length of the drop. All four OTTO shades contain a dimmable LED source. Each shade rotates 300° to cast light directionally. The fixture can rotate 245° from the canopy.

Materials

Shades: Powder coated aluminum Ceiling mount: Powder coated and plated aluminum Frame: Plated brass Drop: Plated brass Hardware: Plated and polished brass

Shade Color

Black Satin (ivory satin interior) Grey Gloss (ivory satin interior) lvory Satin (ivory satin interior) White Satin (white satin interior)

Finish

Brushed Brass Polished Nickel

Oil Rubbed Bronze

Custom colors available.

Custom finishes available.

Lamping

LED: Warm white 2700K Lumens: 3360 (equivalent to four 60W incandescent bulbs)

50,000 LED life hours (approx.)

Power Supply

60W 24V For 120V areas: dimmable Class 2 included in canopy. For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

Voltage / Wattage 24V / 44 watts

Weight 10 lbs (4.5 kg)

Remarks

Specify drop length. Fixed drop not adjustable on site. Arm length is fixed. Not for use on sloped ceilings. Black exterior electrical cord is standard.

Remarks continued


Hardware finish consistent with frame finish. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions 4.5" D x 98" W x 74.5" H (11 D x 249 W x 189 cm H) Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H) Shade: 1.5" Ø x 28" L (4 Ø x 71 cm L) Min overall height: 74" (188 cm) Max overall height: 159" (404 cm)





No. 218

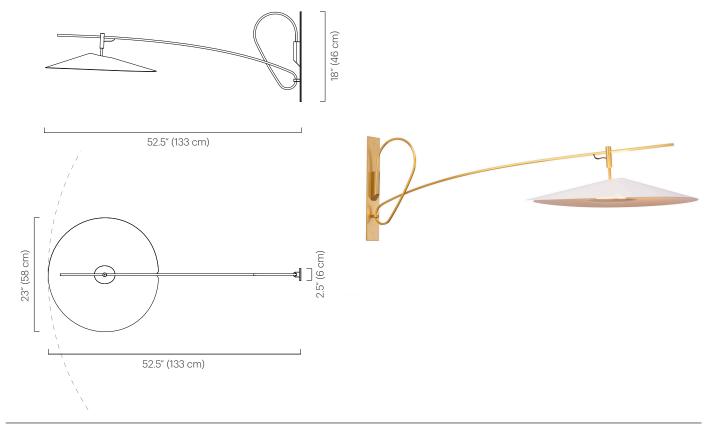



Description

The Treble Sconce features a single arm anchored by a solid brass wall mount. The sconce has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with an acrylic diffuser. The arm swings side to side from the wall mount.

Materials

Shade: Powder coated aluminum Frame: Plated brass Wallmount: Plated brass Lamp enclosure: Acrylic, aluminum, steel and plated brass.

Shade Color

Black Satin (ivory satin interior) Grey Gloss (ivory satin interior) Ivory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Anodized:

Polished Black (matte gold interior)

Polished Black (red ombre interior)

Finish

Brushed Brass

Polished Nickel Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K Lumens: 1200 (equivalent to one 75W incandescent bulb) CRI: 80+ 50,000 LED life hours (approx.)

Power Supply

60W 24V

For 120V areas: dimmable Class 2 included in canopy. For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

ELV Dimmer compatible

Voltage / Wattage 24V / 11.5 W

Weight

15 lbs (6.8 kg)

Remarks

uniquly balance, therefore shade location may vary up to 2" on arm. Shade does not rotate. Black exterior electrical cord is standard. Custom arm length available 36" - 72" (91 -182 cm) Additional weight support reccomended. Hardware finish consistent with frame finish. Indoor use and dry locations only. Wall mount designed to fit 2" x 4" vertical switch box only.

Each fixture is handmade and


TECHNICAL SPECIFICATIONS

Dimensions

52.5" L x 23" W x 18" H (133 L x 58 W x 46 cm H) Wallmount: 2.5" W x 18" H (6 W x 46 cm H) Shade: 23" Ø x 4" H (58 Ø x 10 cm H)



Treble Standing Lamp

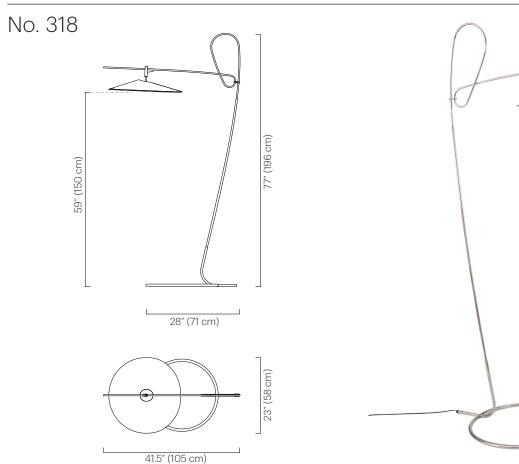

Description

The Treble Standing Lamp features a plated frame and a single Treble

Powder coated:

Black Satin (ive shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with an acrylic diffuser.

Materials

Shade: Anodized or powder coated aluminum Frame: Plated steel and brass Lamp enclosure: Arylic, aluminum, steel and plated brass.

Shade Color

Black Satin (ivory satin interior) Grey Gloss (ivory satin interior) Ivory Satin (ivory satin interior) ○ White Satin (white satin interior)

Custom colors available.

Anodized:

Polished Black (matte gold interior) Polished Black (red ombre interior)

Finish

Brushed Brass Polished Nickel Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K Lumens: 825 (equivalent to one 60W incandescent bulb) CRI: 80+ 54,000 LED life hours (approx.)

Voltage / Wattage

120V (Direct Voltage) / 10W

Weight

20 lbs (9 kg)

Remarks

Fixture is not UL listed. Arm length is fixed. Shade does not rotate. Hardware finish consistent with frame finish. Dimmer switch located on cord. Cord color is black; length approx. 10 feet. Indoor use and dry locations only.


Dimensions41.5" D x 23" W x 77" H
(105 D x 58 W x 196 cm H)
Shade: 23" Ø x 4" H (58 Ø x 10 cm H)





Treble Loop Pendant

TECHNICAL SPECIFICATIONS

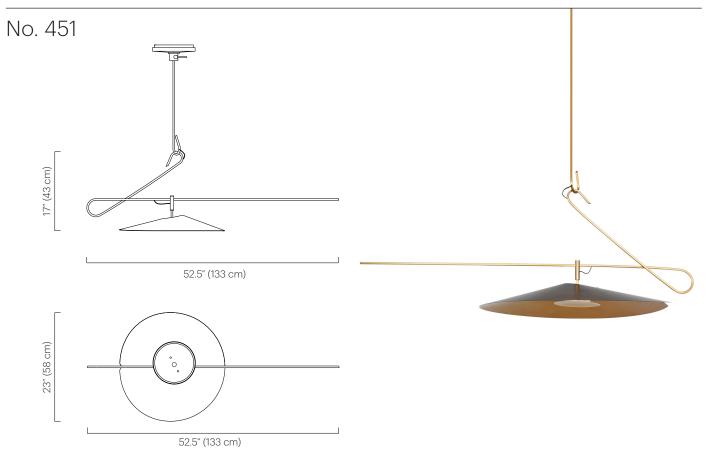

Description

The Treble Loop is a balanced fixture on an asymmetrical axis, which allows gentle movement. The fixture has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with an acrylic diffuser. The fixture can rotate 245° from the canopy.

Materials

Shade: Powder coated aluminum Ceiling mount: Powder coated aluminum and steel. Frame: Plated brass Drop: Plated brass Lamp enclosure: Acrylic, aluminum, steel and plated brass.

Shade Color

Black Satin (ivory satin interior) Grey Gloss (ivory satin interior) Ivory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Anodized: Polished Black

(matte gold interior) Polished Black (red ombre interior)

Finish

Brushed Brass Polished Nickel Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K Lumens: 1200 (equivalent to one 75W incandescent bulb) CRI: 80+ 50,000 LED life hours (approx.)

Power Supply

60W 24V For 120V areas: dimmable Class 2 included in canopy. For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

ELV Dimmer compatible

Voltage / Wattage 24V /12W

Weight

10 lbs (4.5 kg)

Remarks

Specify drop length. Fixed drop not adjustable on site. Arm and frame lengths are fixed. Shade does not rotate.


Not for use on sloped ceilings. Black exterior electrical cord is standard. Hardware finish consistent with frame finish. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions 52.5" L x 23" W x 17" H (133 L x 58 W x 43 cm H) Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H) Shade: 23" Ø x 4" H (58 Ø x 10 cm H) Min. overall height: 25" (63 cm)

452 Treble Tiered Mobile 2 Tier Polished Black (Gold Interior) + Brushed Brass

Treble Tiered Mobile, 2 Tier

TECHNICAL SPECIFICATIONS

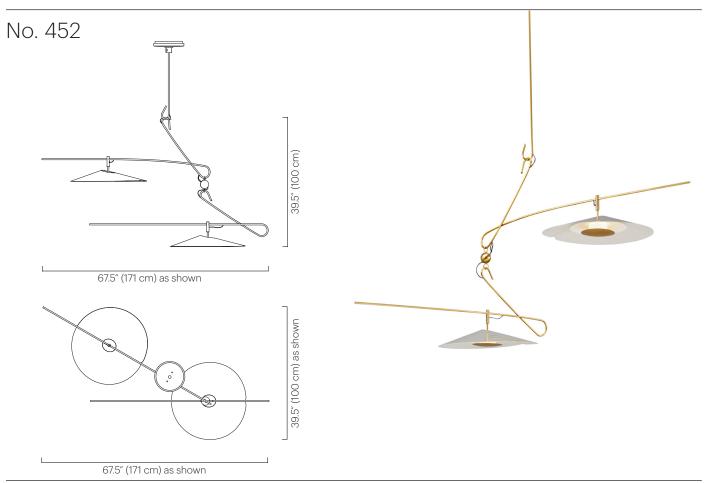

Description

The Treble Tiered Mobile features two tiers of different lengths that balance on asymmetrical axes, which allows gentle movement. Each tier has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with an acrylic diffuser. The fixture can rotate 245° from the canopy. Tier rotation is adjustable and can be set on site.

Materials

Shade: Powder coated aluminum Ceiling mount: Powder coated aluminum and steel. Frame: Plated brass Drop: Plated brass Lamp enclosure: Acrylic, aluminum, steel and plated brass.

Shade Color

Black Satin (ivory satin interior)
 Grey Gloss (ivory satin interior)
 Ivory Satin (ivory satin interior)
 White Satin (white satin interior)

Custom colors available.

Anodized:

Polished Black(matte gold interior)Polished Black

(red ombre interior)

Brushed BrassPolished NickelOil Rubbed Bronze

Custom finishes available.

Lamping

Finish

LED: Warm white 2700K Lumens: 2400 (equivalent to two 75W incandescent bulbs) CRI: 80+ 50,000 LED life hours (approx.)

Power Supply

60W 24V For 120V areas: dimmable Class 2 included in canopy. For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

ELV Dimmer compatible

Voltage / Wattage 24V / 23W

Weight

15 lbs (6.8 kg)

Remarks

Each fixture is handmade and therefore may vary up to 3" in overall height due to the counterbalancing nature.
Specify drop length.
Arm and frame lengths are fixed.
Shade does not rotate.
Fixed drop not adjustable on site.


Remarks continued

Not for use on sloped ceilings.
Black exterior electrical cord
is standard.
Hardware finish consistent
with frame finish.
Ceiling mount consistent
with shade color.
Additional weight support
recommended for junction
box installation.
Indoor use and dry locations only.

Dimensions

Tier 1: 52.5" (133 cm)
Tier 2: 57" (145 cm)
Max. dimensions: 90" L x 23" W
(229 L x 58 cm W)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Shade: 23" Ø x 4" H
(58 Ø x 10 cm H)
Min. overall height: 47.5" (121 cm)



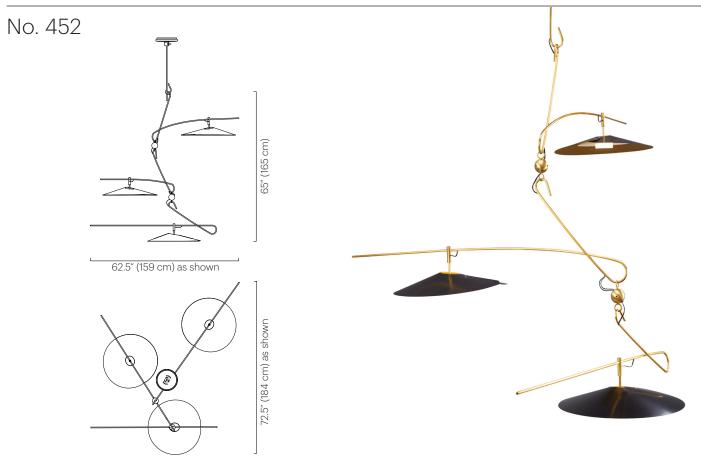

Description

The Treble Tiered Mobile features three tiers of different lengths that balance on asymmetrical axes, which allows gentle movement. Each tier has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with an acrylic diffuser. The fixture can rotate 245° from the canopy. Tier rotation is adjustable and can be set on site.

Materials

Shade: Powder coated aluminum Ceiling mount: Powder coated aluminum and steel. Frame: Plated brass Drop: Plated brass Lamp enclosure: Acrylic, aluminum, steel and plated brass.

Shade Color

62.5" (159 cm) as shown

Black Satin (ivory satin interior) Grey Gloss (ivory satin interior) Vory Satin (ivory satin interior) White Satin (white satin interior) Custom colors available.

Anodized: Polished Black

(matte gold interior)

Polished Black (red ombre interior)

Finish

Brushed Brass

Polished Nickel Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warr Lumens: 75W incangescent pulps) 50,000 LED life hours (approx.)

Power Supply

60W 24V For 120V areas: dimmable Class 2 included in canopy. For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

ELV Dimmer compatible

Voltage / Wattage 24V / 35W

Weight

25 lbs (11.3) kg

Remarks

Each fixture is handmade and therefore may vary up to 3" in overall height due to the counterbalancing nature. Specify drop length. Arm and frame lengths are fixed. Shade does not rotate. Fixed drop not adjustable on site.


Remarks continued

Not for use on sloped ceilings. Black exterior electrical cord is standard. Hardware finish consistent with frame finish. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions Tier 1: 52.5" (133 cm) Tier 2: 57" (145 cm) Tier 3: 63" (160 cm) Max. dimensions: 108.5" L x 23" W (267 L x 58 cm W) Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H) Shade: 23" Ø x 4" H (58 Ø x 10 cm H) Min. overall height: 73" (185 cm)

Treble Tiered Mobile, 4 Tier

TECHNICAL SPECIFICATIONS

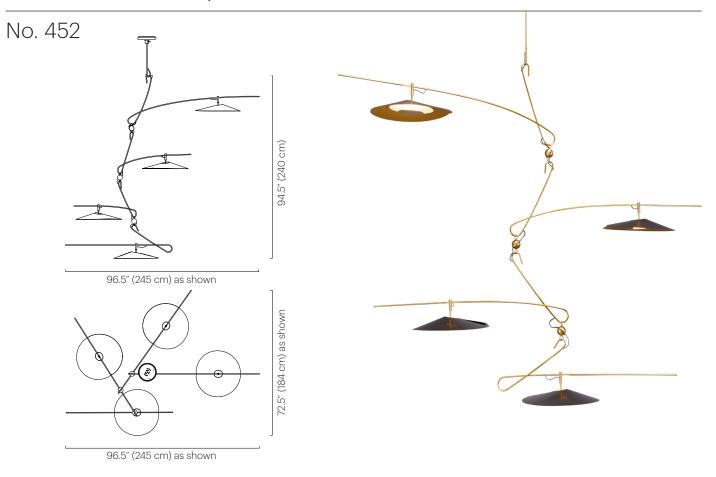

Description

The Treble Tiered Mobile features four tiers of different lengths that balance on asymmetrical axes, which allows gentle movement. Each tier has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with an acrylic diffuser. The fixture can rotate 245° from the canopy. Tier rotation is adjustable and can be set on site.

Materials

Shade: Powder coated aluminum Ceiling mount: Powder coated aluminum and steel. Frame: Plated brass Drop: Plated brass Lamp enclosure: Acrylic, aluminum, steel and plated brass.

Shade Color

Black Satin (ivory satin interior) Grey Gloss (ivory satin interior) Ivory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Anodized:

Polished Black (matte gold interior) Polished Black

(red ombre interior)

Finish

Brushed Brass

Polished Nickel Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K Lumens: 4800 (equivalent to four 75W incandescent bulbs) 50,000 LED life hours (approx.)

Power Supply

60W 24V For 120V areas: dimmable Class 2 included in canopy. For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

ELV Dimmer compatible

Voltage / Wattage 24V / 46 W

Weight 30 lbs (13.6 kg)

Remarks

Each fixture is handmade and therefore may vary up to 3" in overall height due to the counterbalancing nature. Specify drop length. Arm and frame lengths are fixed. Shade does not rotate. Fixed drop not adjustable on site.

Remarks continued

Not for use on sloped ceilings. Black exterior electrical cord is standard. Hardware finish consistent with frame finish. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions


Tier 1: 52.5" (133 cm) Tier 2: 57" (145 cm) Tier 3: 63" (160 cm) Tier 4: 65" (165 cm) Max. dimension: 122" L x 23" W (310 L x 58 cm W) Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H) Shade: 23" Ø x 4" H (58 Ø x 10 cm H) Min. overall height: 102.5" (260 cm)




Treble Pendant

TECHNICAL SPECIFICATIONS

No. 453







Description

The Treble Pendant has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with an acrylic diffuser. The fixture can rotate 245° from the canopy.

Materials

Shade: Powder coated aluminum Ceiling mount: Powder coated aluminum and steel. Frame: Plated brass Drop: Plated brass Lamp enclosure: Acrylic, aluminum, steel and plated brass.

Shade Color

Black Satin (ivory satin interior) Grey Gloss (ivory satin interior) ○ Ivory Satin (ivory satin interior) ○ White Satin (white satin interior)

Custom colors available.

Anodized:

Polished Black (matte gold interior) Polished Black (red ombre interior)

Finish

Brushed Brass

Polished Nickel Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K Lumens: 1200 (equivalent to one 75W incandescent bulb) CRI: 80+ 50,000 LED life hours (approx.)

Power Supply

60W 24V For 120V areas: dimmable Class 2 included in canopy. For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility ELV Dimmer compatible

Voltage / Wattage 24V /12W

Weight


10 lbs (4.5 kg)

Remarks

Specify drop length. Fixed drop not adjustable on site. Shade does not rotate. Not for use on sloped ceilings. Black exterior electrical cord is standard. Hardware finish consistent with frame finish. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.


Dimensions

23" L x 23" W x 7.5" H (58 L x 58 W x 19 cm H) Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H) Shade: 23" Ø x 4" H (58 Ø x 10 cm H) Min. overall height: 16" (41 cm)

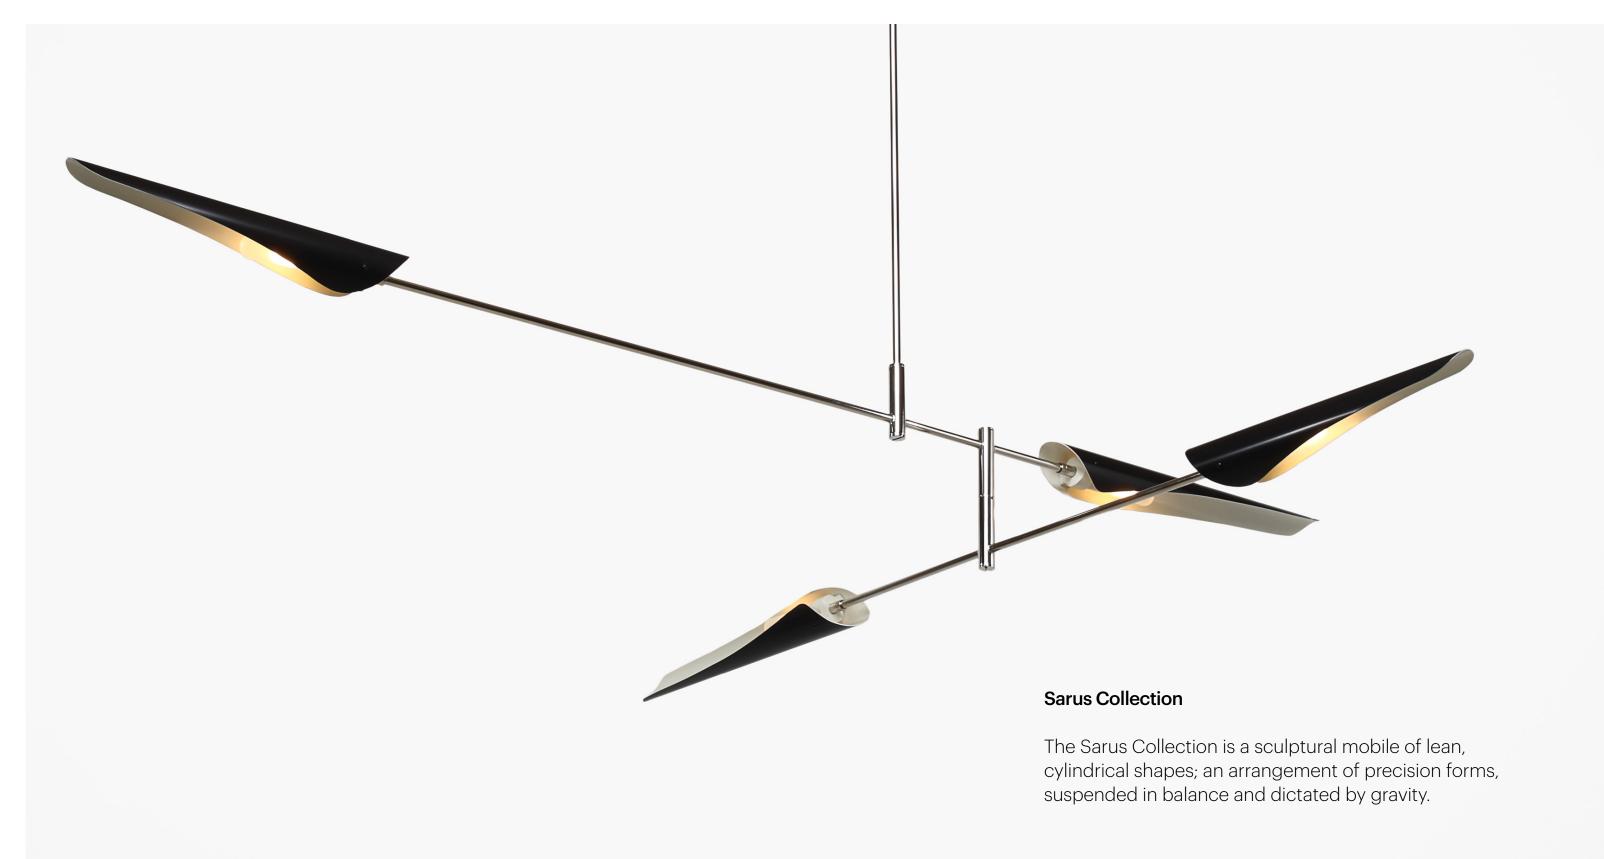

No. 113

Sarus Table Lamp

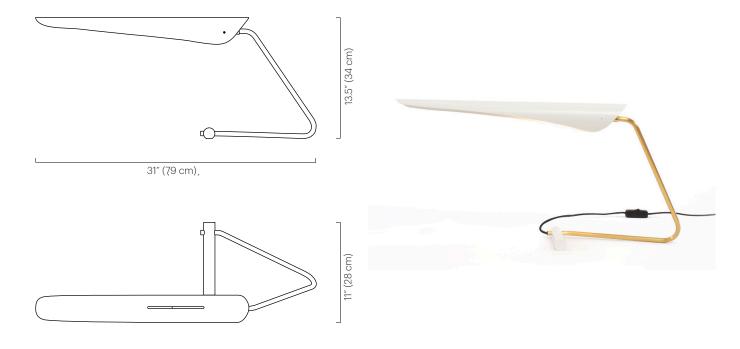



Description

The Sarus shade is mounted to a hand bent steel frame. The powder coated aluminum shade rotates 320° to cast light directionally.

Materials

Shade: Powder coated aluminum Frame: Plated steel Base: Powder coated steel

Base & Shade Color

Black Satin (ivory satin interior) Grey Gloss (ivory satin interior) Ivory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Finish

O Polished Nickel Brushed Brass

Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: T10 tubular incandescent medium base 40W max 220-240V: E27 base (tubular 32mm recommended) 40W max Note: Bulbs not included. Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request) 110-120V~/ 6W/ 420 lm/ 3000K T38, E26 3.7" L x 4.7" ø ETL

Wattage 40 watts max

Weight

5 lbs (2.3 kg)


Remarks

UL listed. On/Off switch located on cord. Shade and base are same color. Cord color is black; length approx. 7 feet. Indoor use and dry locations only.

Dimensions

31" D x 11" W x 13.5" H (79 D x 28 W x 34 cm H) Shade: 3" Ø x 23" L (8 Ø x 58 cm L)

No. 221

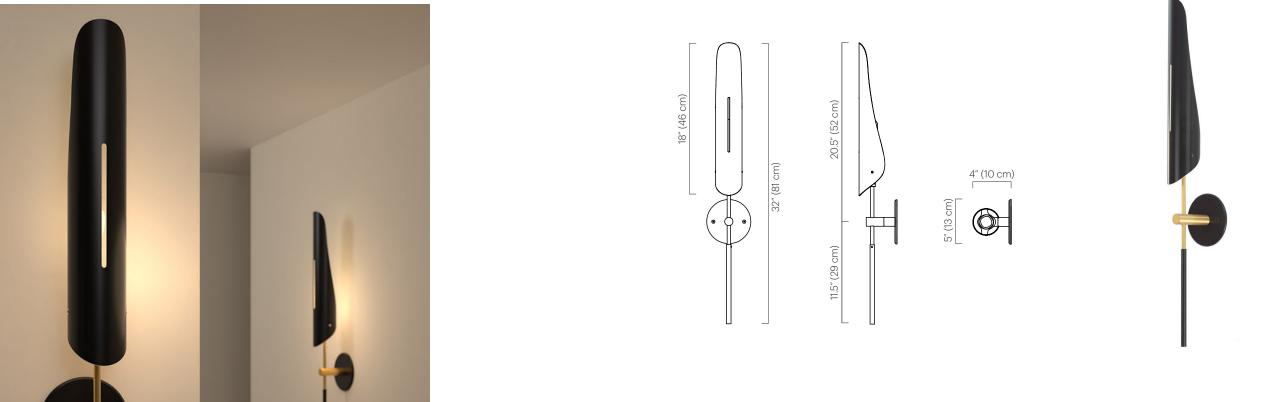

Description

The Sarus Sconce features two arms on opposing sides affixed to a powder coated steel wall mount. A single shade is balaced upright with a counterweight. The shade swivels 320° to cast light directionally.

Materials

Shade: Powder coated aluminum Wall mount: Powder coated steel Hardware: Plated brass Arm: Plated steel Counterweight: Powder coated steel Custom finishes available.

Mount & Shade Color

Black Satin (ivory satin interior) Grey Gloss (ivory satin interior) Ivory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Finish

O Polished Nickel

Brushed Brass
Oil Rubbed Bronze

Lamping

120V: T10 tubular incandescent medium base 60W max 220-240V: E27 base (tubular 32mm suggested) 60W max Note: Bulbs not included. Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request) 110-120V~/ 6W/ 420 lm/ 3000K T38, E26 3.7" L x 4.7" ø ETL

Wattage 60 watts max

Weight 5lb (2.3 kg)

Remarks


UL Listed. Hardwired is standard. Indoor use and dry locations only. Wall mount consistent with shade color. Counterweights are black. ADA compliant.

Dimensions

Single: 4" D x 5" W x 32" H (10 D x 13 W x 81 cm H) Wall mount diameter: 5" (13 cm) Shade: 18" L x 3" Ø (46 L x 8 Ø cm)

Sarus Sconce - Double

No. 223

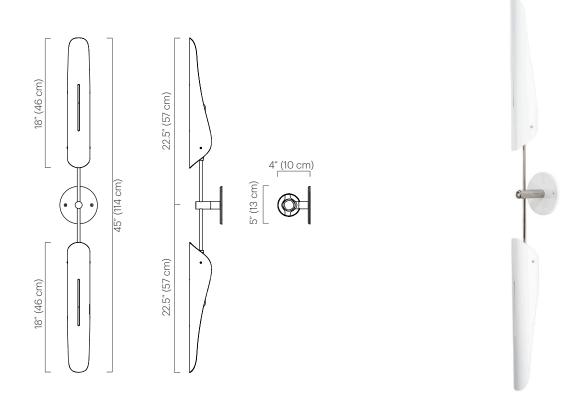

Description

The Sarus Sconce features two arms on opposing sides affixed to a powder coated steel wall mount. The shades swivel 320° to cast light directionally.

Materials

Shade: Powder coated aluminum Wall mount: Powder coated steel Hardware: Plated brass Arm: Plated steel Counterweight: Powder coated steel

Mount & Shade Color

Black Satin (ivory satin interior) Grey Gloss (ivory satin interior) Ivory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Finish

O Polished Nickel Brushed Brass
Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: (2) T10 tubular incandescent medium base 60W max 220-240V: (2) E27 base (tubular 32mm suggested) 60W max Note: Bulbs not included. Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request) 110-120V~/ 6W/ 420 lm/ 3000K T38, E26 3.7" L x 4.7" ø ETL

Wattage 120 watts max

Weight 5lb (2.3 kg)

Remarks

UL Listed. Hardwired is standard. Indoor use and dry locations only. Wall mount consistent with shade color. Counterweights are black. ADA compliant.


Dimensions

4" D x 5" W x 45" H (10 D x 13 W x 114 cm H) Wall mount diameter: 5" (13 cm) Shade: 18" L x 3" Ø (46 L x 8 Ø cm)



Sarus Mobile, 2 Tier

TECHNICAL SPECIFICATIONS

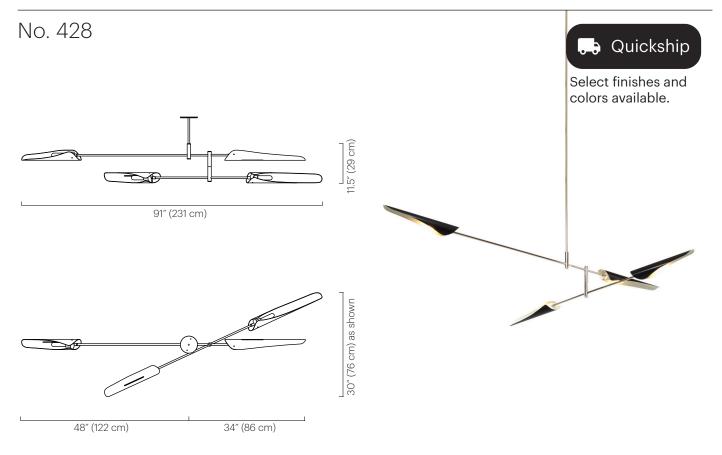

Description

The Sarus Mobile is a carefully balanced fixture, featuring two tiers of differing lengths. Each tier has one large and one small Sarus shade. Tiers scissor open when installed; arrangement is adjustable on site. Shades swivel 320° to cast light directionally.

Materials

Shades: Powder coated aluminum Frame: Plated steel Ceiling mount: Powder coated steel Drop: Plated steel

Shade Color

Black Satin (ivory satin interior) Grey Gloss (ivory satin interior) Ivory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Finish

O Polished Nickel Brushed Brass

Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: (4)T10 tubular incandescent medium base 60W max 220-240V: (4)E27 base (tubular 32mm suggested) 60W max Note: Bulbs not included. Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request) 110-120V~/ 6W/ 420 lm/ 3000K T38, E26 3.7" L x 4.7" ø ETL

Wattage

240 watts max

Weight

15 lbs (6.8 kg)

Remarks

Specify drop length. Fixed drop not adjustable on site. Tier lengths cannot be customized. Each tier has two shades. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.


Dimensions

Tier 1: 82" (208 cm) Tier 2: 69" (175 cm) Ceiling mount diameter: 5" (13 cm) Minimum overall height: 12.5" (32 cm) Large Shade: 23" L x 3" Ø (58 L x 8 Ø cm) Small Shade: 18" L x 3" Ø (46 L x 8 Ø cm)




Quickship







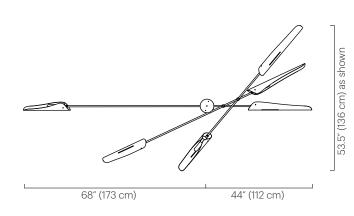





Description

The Sarus Mobile is a carefully balanced fixture, featuring three tiers of differing lengths. Each tier has one large and one small Sarus shade. Tiers scissor open when installed; arrangement is adjustable on site. Shades swivel 320° to cast light directionally.

Materials

Frame: Plated steel Ceiling mount: Powder coated steel Drop: Plated steel

Shade Color

Black Satin (ivory satin interior) Grey Gloss (ivory satin interior) Ivory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Finish

Polished Nickel Brushed Brass

Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: (6)T10 tubular incandescent medium base 60W max 220-240-V: (6)E27 base (tubular 32mm suggested) 60W max Note: Bulbs not included. Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request) 110-120V~/ 6W/ 420 lm/ 3000K T38, E26 3.7" L x 4.7" Ø ETL

Wattage

360 watts max Weight 25 lbs (11.3 kg)

Indoor use and dry locations only.

Remarks

Specify drop length.

Fixed drop not adjustable on site.

Tier lengths cannot be customized.

Due to the length of tiers, a natural

arc occurs on the longest tier.

Each tier has two shades.

Ceiling mount consistent

Additional weight support

recommended for junction

with shade color.

box installation.


Dimensions Tier 1: 112" (285 cm) Tier 2: 82" (208 cm) Tier 3: 69" (175 cm) Ceiling mount diameter: 5" (13 cm) Minimum overall height: 19" (48 cm) Large Shade: 23" L x 3" Ø (58 L x 8 Ø cm) Small Shade: 18" L x 3" Ø (46 L x 8 Ø cm)



Shades: Powder coated aluminum

Sarus Mobile, 4 Tier

TECHNICAL SPECIFICATIONS

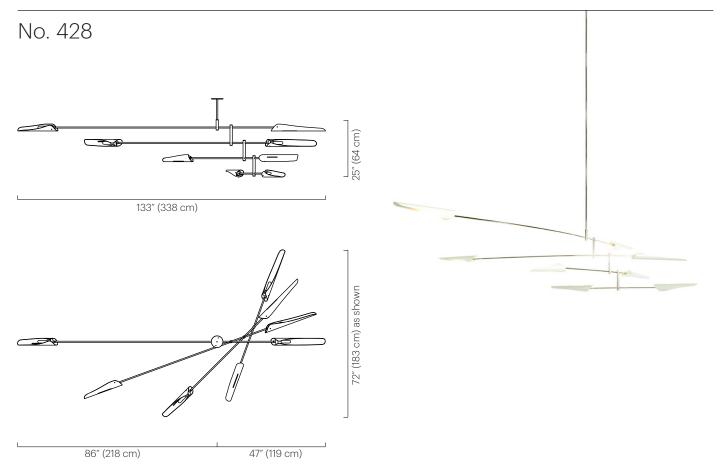

Description

The Sarus Mobile is a carefully balanced fixture, featuring four tiers of differing lengths. Each tier has one large and one small Sarus shade. Tiers scissor open when installed; arrangement is adjustable on site. Shades swivel 320° to cast light directionally.

Materials

Shades: Powder coated aluminum Frame: Plated steel Ceiling mount: Powder coated steel Drop: Plated steel

Mount & Shade Color

Black Satin (ivory satin interior) Grey Gloss (ivory satin interior) Ivory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Finish

O Polished Nickel Brushed Brass

Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: (8)T10 tubular incandescent medium base 60W max 220-240V: (8)E27 base (tubular 32mm suggested) 60W max Note: Bulbs not included. Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request) 110-120V~/ 6W/ 420 lm/ 3000K T38, E26 3.7" L x 4.7" ø ETL

Wattage 480 watts max

Weight 35 lbs (15.8 kg)

Remarks

Specify drop length. Fixed drop not adjustable on site. Tier lengths cannot be customized. Due to the length of tiers, a natural arc occurs on the two longest tiers. Each tier has two shades. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.


Dimensions

Tier 1: 133" (338 cm) Tier 2: 112" (285 cm) Tier 3: 82" (208 cm) Tier 4: 69" (175 cm) Ceiling mount diameter: 5" (13 cm) Minimum overall height: 26" (66 cm) Large Shade: 23" L x 3" Ø (58 L x 8 Ø cm) Small Shade: 18" L x 3" Ø (46 L x 8 Ø cm)



Torroja Sconce - Single

No. 222

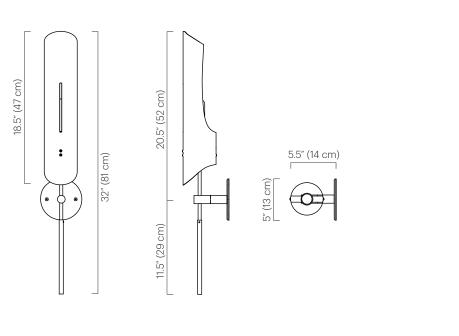



Description

The Torroja Sconce features two arms on opposing sides affixed to a powder coated steel wall mount. A single shade is balaced upright with a counterweight. The shade swivels 320° to cast light directionally.

Materials

Shade: Powder coated aluminum Wall mount: Powder coated steel Hardware: Plated brass Arm: Plated steel Counterweight: Powder coated steel

Mount & Shade Color

- Black Satin (ivory satin interior) Ivory Satin (ivory satin interior) White Satin (white satin interior)
- Custom colors available.

Finish

- O Polished Nickel Brushed Brass Oil Rubbed Bronze
- Custom finishes available.

Lamping

120V: T10 tubular incandescent medium base 60W max 220-240V: E27 base (tubular 32mm suggested) 60W max Note: Bulbs not included. Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request) 110-120V~/ 6W/ 420 lm/ 3000K T38, E26 3.7" L x 4.7" ø ETL

Wattage 60 watts max

Weight 7lb (3.2 kg)

Remarks


UL Listed. Hardwired is standard. Indoor use and dry locations only. Wall mount consistent with shade color.

Counterweights are black.

Dimensions 5.5" D x 5" W x 32" H (14 D x 13 W x 81 cm H) Wall mount diameter: 5" (13 cm) Shade: 4" Ø x 18.5" L (10 Ø x 47 cm L)



No. 224

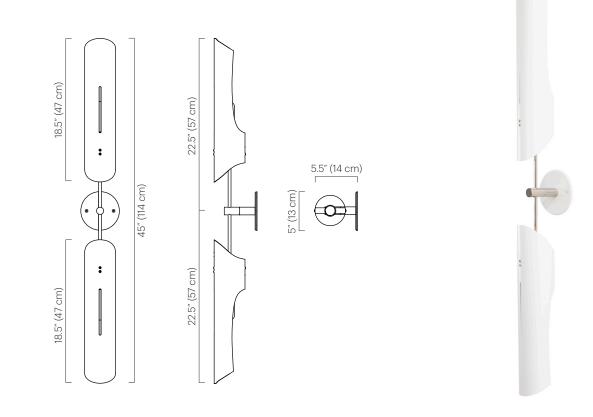

Description

The Torroja Sconce features two arms on opposing sides affixed to a powder coated steel wall mount. The shades swivel 320° to cast light directionally.

Materials

Shade: Powder coated aluminum Wall mount: Powder coated steel Hardware: Plated brass Arm: Plated steel Counterweight: Powder coated steel

Mount & Shade Color

Black Satin (ivory satin interior) Ivory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Finish

O Polished Nickel Brushed Brass Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: (2) T10 tubular incandescent medium base 60W max 220-240V: (2) E27 base (tubular 32mm suggested) 60W max Note: Bulbs not included.

Tala T38 LED Bulb

(Available per request) 110-120V~/ 6W/ 420 lm/ 3000K T38, E26 3.7" L x 4.7" ø ETL

Halogen bulbs not recommended.

Wattage

120 watts max

Weight 7lb (3.2 kg)

Remarks

UL Listed. Hardwired is standard. Indoor use and dry locations only. Wall mount consistent with shade color.


Counterweights are black.

Dimensions 5.5" D x 5" W x 45" H (14 D x 13 W x 114 cm H) Wall mount diameter: 5" (13 cm) Shade: 4" Ø x 18.5" L (10 Ø x 47 cm L)



Torroja Standing Lamp

No. 309

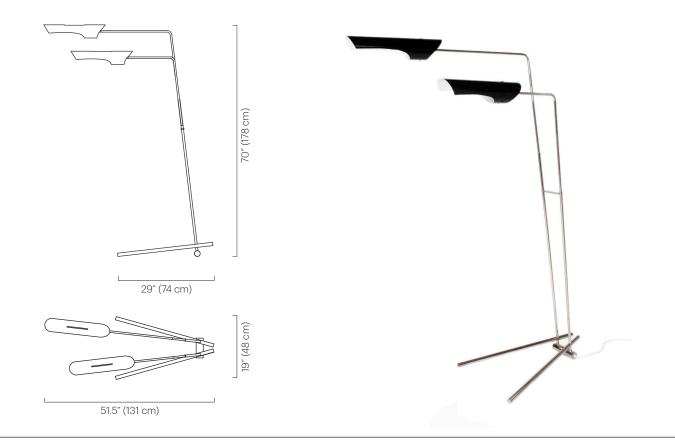

Description

The Torroja Standing Lamp features a plated steel frame with two arms that extend over the base. Powder coated aluminum shades rotate 320° to cast light directionally.

Materials

Shades: Powder coated aluminum Frame: Plated steel

Shade Color

Black Satin (ivory satin interior) Ivory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Finish

Polished Nickel

Lamping 120V: (2)T10 tubular incandescent bulbs medium base 40W max 220-240V: (2)E27 base (tubular 32mm suggested) 40W max Note: Bulbs not included. Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request) 110-120V~/ 6W/ 420 lm/ 3000K T38, E26 3.7" L x 4.7" ø ETL

Wattage

80 watts max

Weight 30 lbs (13.6 kg)

Remarks


UL listed. Dimmer switch located on cord.
Arm height is not adjustable.
Cord color is black;
length approx. 10 feet. Indoor use and dry locations only.

Dimensions Base: 19" W x 29" D Hase: 19" W x 29" D (48 W x 74 cm D) 70" H x 51.5" D (178 H x 131 cm D) Shade: 4" Ø x 18.5" L (10 Ø x 47 cm L)



Torroja Tiered Pendant, 2 Tier

TECHNICAL SPECIFICATIONS

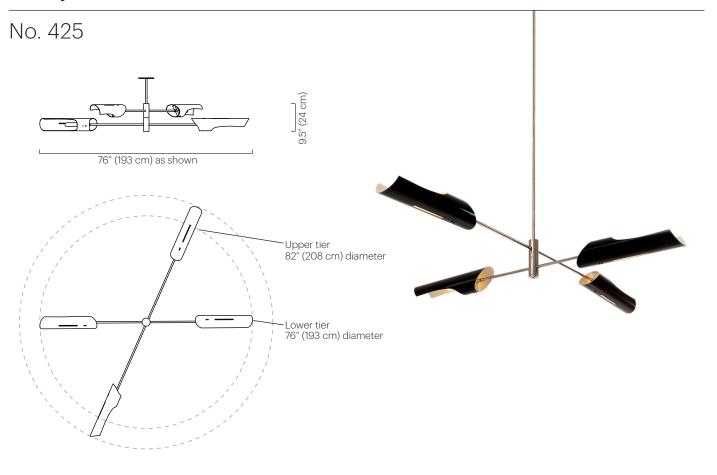

The Torroja Tiered Pendant features a plated frame customizable by the number and length of the tiers. Each tier consists of two shades. Tiers scissor open and are adjustable on site.Shades rotate 320° to cast light directionally.

Materials

Shades: Powder coated aluminum Frame: Plated steel Ceiling mount: Powder coated steel Drop: Plated steel

Shade Color

Black Satin (ivory satin interior) Ivory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Finish

Polished Nickel Brushed Brass

Oil Rubbed Bronze

Custom finishes available.

Lamping (Two shades per tier)

120V: (2)T10 tubular incandescent medium base 60W max 220-240V: (2)E27 base (tubular 32mm suggested) 60W max Note: Bulbs not included. Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request) 110-120V~/ 6W/ 420 lm/ 3000K T38, E26 3.7" L x 4.7" ø ETL

Wattage

120 watts max per tier

Weight 13 lbs (6 kg)

Specify drop length. Fixed drop not adjustable on site. Each tier has two shades. Specify tier lengths. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.


Dimensions

Standard tier diameters: 52" / 65" / 76" / 82" (132 cm / 165 cm / 193 cm / 208 cm) or specify custom tier diameters. Min. length of tier: 48" (122 cm) Max. length of tier: 120" (305 cm) Shade: 4" Ø x 18.5" L (10 Ø x 47 cm L) Ceiling mount diameter: 5" (13 cm) Minimum overall height: 11" (28 cm)



Torroja Tiered Pendant, 3 Tier

TECHNICAL SPECIFICATIONS

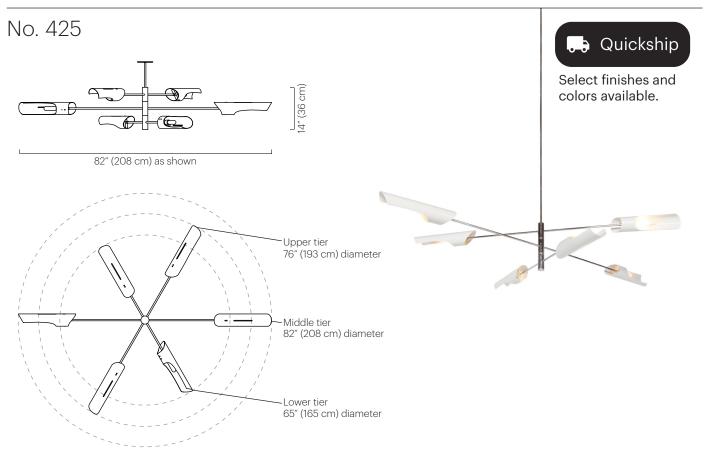

Description

The Torroja Tiered Pendant features a plated frame customizable by the number and length of the tiers. Each tier consists of two shades. Tiers scissor open and are adjustable on site. Shades rotate 320° to cast light directionally.

Materials

Shades: Powder coated aluminum Frame: Plated steel Ceiling mount: Powder coated steel Drop: Plated steel

Shade Color

Black Satin (ivory satin interior) Ivory Satin (ivory satin interior)

Custom colors available.

Finish

Polished Nickel

Brushed Brass

Custom finishes available.

Lamping (Two shades per tier)

White Satin (white satin interior)

Oil Rubbed Bronze

120V: (2)T10 tubular incandescent medium base 60W max 220-240V: (2)E27 base (tubular 32mm suggested) 60W max Note: Bulbs not included. Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request) 110-120V~/ 6W/ 420 lm/ 3000K T38, E26 3.7" L x 4.7" ø ETL

Wattage

120 watts max per tier

Weight 18 lbs (8 kg)


Remarks


Specify drop length. Fixed drop not adjustable on site. Each tier has two shades. Specify tier lengths. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions

Standard tier diameters: 52" / 65" / 76" / 82" (132 cm / 165 cm / 193 cm / 208 cm) or specify custom tier diameters. Min. length of tier: 48" (122 cm) Max. length of tier: 120" (305 cm) Shade: 4" Ø x 18.5" L (10 Ø x 47 cm L) Ceiling mount diameter: 5" (13 cm) Minimum overall height: 15.5" (39 cm)

Torroja Tiered Mobile

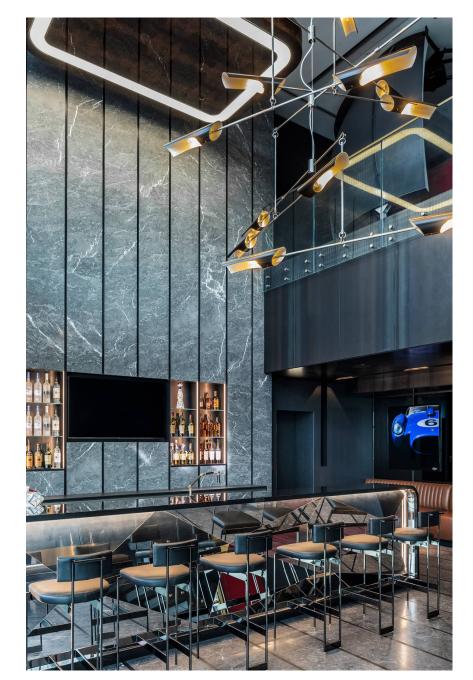

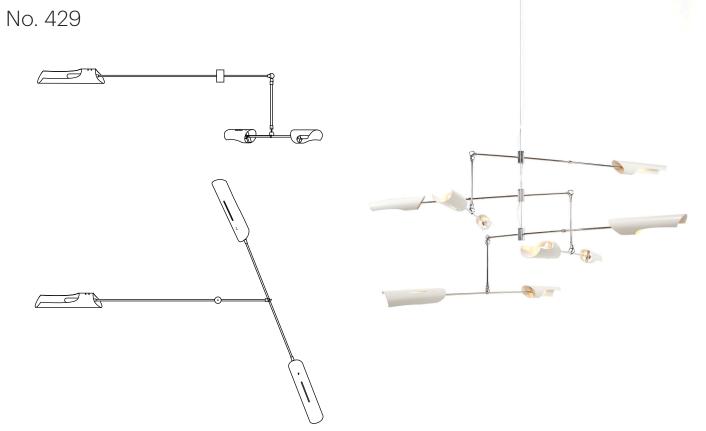

Description

The Torroja Tiered Mobile is a totally customizeable fixture. The quantity and size of the tiers can be specified for site conditions. Each tier is comprised of three segments, with three shades that balance on an asymetrical axis that allows gentle movement. Torroja shades rotate 320° to cast light directionally.

Materials

Shades: Powder coated aluminum Ceiling mount: Powder coated steel Frame: Plated steel Hub: Plated aluminum (for nickel finish) or brass (for brass finish) Drop: Stainless steel cable

Shade Color

Black Satin (ivory satin interior) Ivory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Finish

Single tier shown above

O Polished Nickel Brushed Brass Oil Rubbed Bronze

Custom finishes available.

Lamping (Three shades per tier)

120V: (3)T10 tubular incandescent medium base 60W max 220-240V: (3)E27 base (tubular 32mm suggested) 60W max Note: Bulbs not included. Halogen bulbs not recommended.

IMPORTANT: Identical bulbs must be used in each socket in order for fixture to properly balance.

Tala T38 LED Bulb

(Available per request) 110-120V~/ 6W/ 420 lm/ 3000K T38, E26 3.7" L x 4.7" ø ETL

Wattage

180 watts max per tier

Weight

Weight varies; depending on number of tiers and dimensions. Each tier: approx. 8-10 lbs (3.6-4.5 ka

Remarks

Shown above with three tiers

Specify drop length. Approx. 6" of extra cable and cord included. Specify number of tiers. Two tier minimum (six shades). Each tier has three shades. Specify tier diameter. Ceiling mount consistent with shade color. White electrical cord is standard. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions

Fixture custom made based on client specifications. Minimum diameter: 60" (152 cm) Maximum diameter: 120" (305 cm) Ceiling mount diameter: 5" (13 cm) Minimum overall height: Two tiers: 24" (61 cm) Three tiers: 31" (79 cm) Shade: 4" Ø x 18.5" L (10 Ø x 47 cm L)






Bullet Table Lamp

No. 109



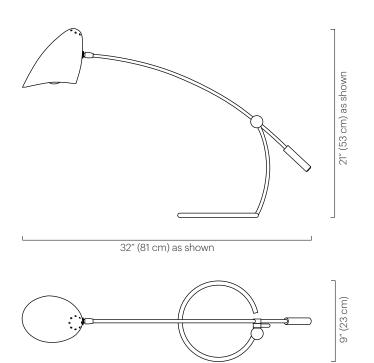



Description

The Bullet Desk Lamp features a counterweighted arm that adjusts up and down to desired height. The handspun aluminum shade rotates 320 degrees to cast light directionally. May be ordered with Bullet or Bottle shades.

Materials

Shade: Powder coated aluminum Frame: Plated steel Counterweight: Power coated steel

Shade Color Bullet

- Black Satin (ivory satin interior)
 Ivory Satin (ivory satin interior)
 White Satin (white satin interior)
- Shade Color Bottle
- Black Satin (ivory satin interior)Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)White Satin (white satin interior)

Custom colors available.

Finish

- O Polished Nickel
 Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: A19 or A15 medium base 40W max 220-240V: E27 base 40W max Note: Bulbs not included. Halogen bulbs not recommended.

Wattage

40 watts max

Weight

5 lbs (2.3 kg)

Remarks

UL listed.
Bullet shade: On/Off switch located on cord.
Bottle shade 120V:
On/Off switch located on shade and cord.
220-240V: On/Off switch located on cord.

Remarks Continued


Cord color is black; length approx. 7 feet. Counterweight and arm adjustment are always black. Indoor use and dry locations only.


Dimensions

Base: 9" Ø (23 cm) Height variable. Adjusts up to 36.5" H (93 cm) Bullet Shade: 9" H x 6" W x 6.5" D (23 H x 15 W x 17 cm D) Bottle Shade: 8.5" H x 5.5" W 8.5" D (22 H x 14 W x 22 cm D)







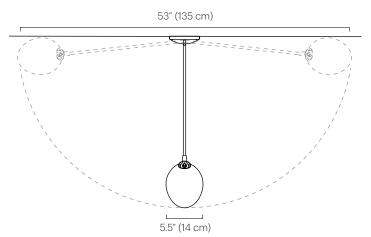



Description

The One Arm Sconce features a single arm affixed to a solid wood wall mount and steel mounting ring. The arm swings from side to side with a handspun aluminum Bottle shade. The shade rotates 320° to cast light directionally.

Materials

Shade: Powder coated aluminum Wall Mount: Finished wood Arm: Plated steel Mounting Ring: Plated steel

Shade Color

Black Satin (ivory satin interior) Grey Gloss (ivory satin interior) Ivory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Finish

Polished Nickel

Brushed Brass Oil Rubbed Bronze

Custom finishes available.

Weight

5 lbs (2.3 kg)

Wall Mount

(matches specified shade) Black Satin: Opaque paint on maple

Grey Gloss: Opaque paint on maple

Olvory Satin: Opaque paint on maple

Also available:

Natural Walnut (clear finish) Natural Maple (clear finish)

Lamping

120V: A19 or A15 medium base 60W max 220-240V: E14 base golf ball 60W max Note: Bulbs not included. Halogen bulbs not recommended.

Wattage

60 watts max


Remarks


UL listed. Hardwired is standard. Custom cord & plug available; length approx 6'. Cord color is black. 120V: Switch is on shade. 220-240V: Hardwired to wall; no switch on shade. Custom arm length available (36" max). Mounting ring matches arm finish. Walnut and maple wood mounts will vary in color from fixture to fixture. Indoor use and dry locations only.

Dimensions

Arm Length: 26.5" (67 cm) Wingspan: 53" (135 cm) Wall mount diameter: 4.5" (11 cm) Shade: 8.5" H x 5.5" W 8.5" D (22 H x 14 W x 22 cm D)





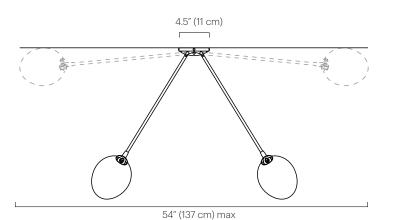



Select finishes and colors available.



Description

The Two Arm Sconce features dual arms affixed to a solid wood wall mount and steel mounting ring. The arms swing from side to side with handspun aluminum Bottle shades. The shades rotate 320° to cast light directionally.

Materials

Shade: Powder coated aluminum Wall Mount: Finished wood Arm: Plated steel Mounting Ring: Plated steel

Shade Color

- Black Satin (ivory satin interior)Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)White Satin (white satin interior)

Custom colors available.

Finish

- Polished NickelBrushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Weight 5 lbs (2.3 kg)

Wall Mount

- (matches specified shade)

 Black Satin: Opaque paint on maple
- Grey Gloss: Opaque paint on maple
- O Ivory Satin: Opaque paint on maple

Also available:

Natural Walnut (clear finish)Natural Maple (clear finish)

Lamping 120V: (2)A19 or A15

medium base 60W max 220-240V: (2)E14 base golf ball 60W max Note: Bulbs not included. Halogen bulbs not recommended.

Wattage

120 watts max

Remarks


UL listed.
Hardwired is standard.
Custom cord & plug available;
length approx 6'.
Cord color is black.
120V: Switch is on shade.
220-240V: Hardwired to wall;
no switch on shade.
Custom arm length available
(36" max).
Mounting ring matches arm finish.
Walnut and maple wood mounts
will vary in color from
fixture to fixture.
Indoor use and dry locations only.


Dimensions

Arm Length: 26.5" (67 cm) Wingspan: 54" (137 cm) Wall mount diameter: 4.5" (11 cm) Shade: 8.5" H x 5.5" W 8.5" D (22 H x 14 W x 22 cm D)

Tripod TECHNICAL SPECIFICATIONS

No. 303

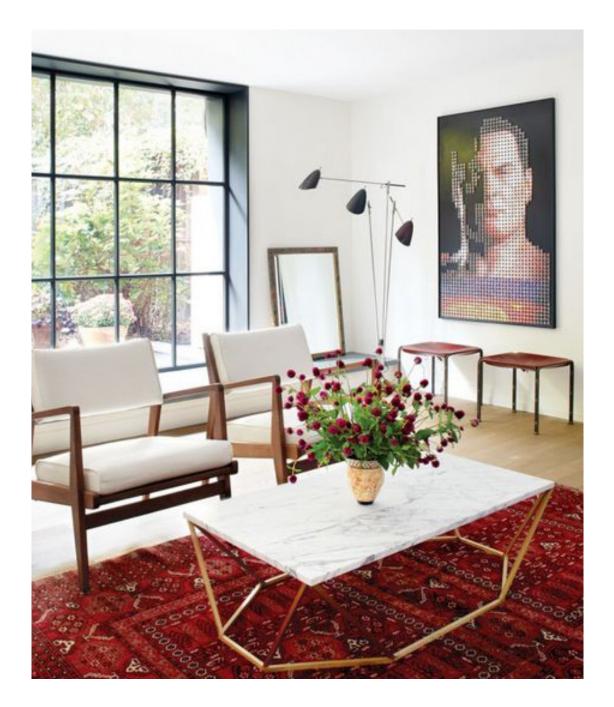

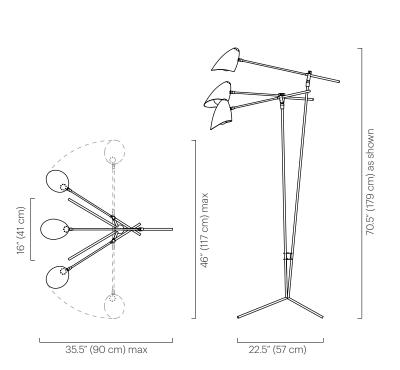



Bullet shade option



Bottle shade option

Description

The Tripod features three counterweighted arms that adjust up and down and swivel side to side. Handspun shades on each arm rotate 320° to cast light directionally. May be ordered with Bullet or Bottle shades.

Materials

Shades: Powder coated aluminum Frame: Plated steel Counterweight: Powder coated steel

Shade Color Bullet

- Black Satin (ivory satin interior) Ivory Satin (ivory satin interior) White Satin (white satin interior)
- **Shade Color Bottle**
- Black Satin (ivory satin interior) Grey Gloss (ivory satin interior) Ivory Satin (ivory satin interior)
- Custom colors available.

Finish

Oil Rubbed Bronze

Custom finishes available.

- White Satin (white satin interior)

- O Polished Nickel Brushed Brass

Lamping

120V: (3)A19 or A15 medium base 60W max 220-240V: Bullet: (3)E27 base 60W max Bottle: (3)E14 base 60W max Note: Bulbs not included. Halogen bulbs not recommended.

Wattage

180 watts max

Weight 15 lbs (6.8 kg)

Remarks

Not UL listed. Bullet shade: On/Off dimmer switch on cord. Bottle shade: 120V: On/Off switch on shade, dimmer on cord. 220-240V: On/Off dimmer switch on cord.

Remarks Continued

Cord color is black; length approx. 10 feet. Counterweight is black. Indoor use and dry locations only.


Dimensions

22.5" D x 16" W x 65" H (57 D x 41 W x 165cm H) Max depth: 35.5" (90 cm) Shade height variable: Min height: 42" (107 cm) Max height: 78" (198 cm) Wingspan: 46" (117 cm) Bullet Shade: 9" H x 6" W x 6.5" D (23 H x 15 W x 17 cm D) Bottle Shade: 8.5" H x 6" W 8.5" D (22 H x 15 W x 22 cm D)

Doublepod TECHNICAL SPECIFICATIONS

No. 305



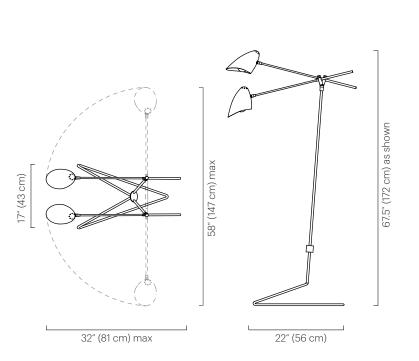



Bottle shade option

Description

The Doublepod is a standing lamp that features two counterweighted arms that adjust up and down and swivel side to side. Handspun shades rotate 320° to cast light directionally. May be ordered with Bullet or Bottle shades.

Materials

Shades: Powder coated aluminum Frame: Plated steel Counterweight: Powder coated steel

Shade Color Bullet

- Black Satin (ivory satin interior)Ivory Satin (ivory satin interior)White Satin (white satin interior)
- **Shade Color Bottle**
- Black Satin (ivory satin interior)
 Grey Gloss (ivory satin interior)
 Ivory Satin (ivory satin interior)
 White Satin (white satin interior)

Custom colors available.

Finish

Polished NickelBrushed Brass

Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: (2)A19 or A15
medium base 60W max
220-240V:
Bullet: (2)E27 base 60W max
Bottle: (2)E14 base 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage 120 watts max

Weight 15 lbs (7 kg)

Remarks

Not UL listed.
Bullet shade: On/Off: dimmer switch on cord.
Bottle shade:
120V: On/Off switch on shade, dimmer on cord.
220-240V: On/Off dimmer switch on cord.

Remarks Continued


Cord color is black; length approx. 10 feet. Counterweight is black. Indoor use and dry locations only.

Dimensions

22" D x 17" W x 61" H
(56 D x 43 W x 155cm H)
Max depth: 32" (81 cm)
Shade height variable:
Min height: 45" (114 cm)
Max height: 72" (183 cm)
Wingspan: 58" (147 cm)
Bullet Shade: 9" H x 6" W x 6.5" D
(23 H x 15 W x 17 cm D)
Bottle Shade: 8.5" H x 6" W 8.5" D
(22 H x 15 W x 22 cm D)

Bottle Tiered Mobile

TECHNICAL SPECIFICATIONS

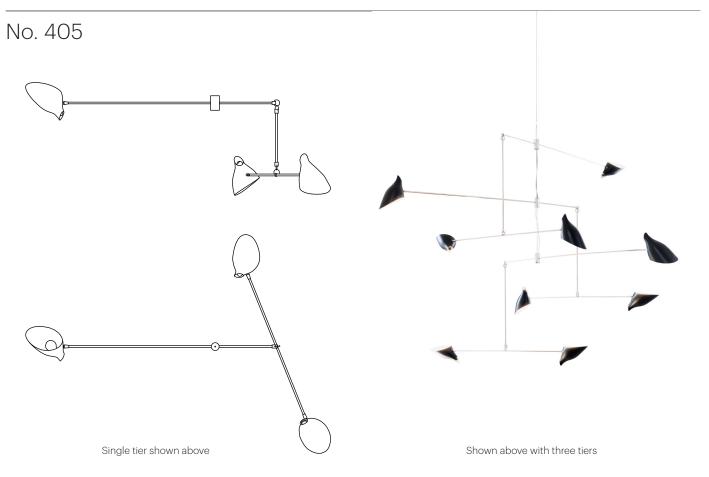

Description

The Bottle Tiered Mobile is a totally customizable fixture. The quantity and size of the tiers can be specified for site conditions. Each tier is comprised of three segments, with three shades that balance on an asymmetrical axis that allows gentle movement. Large bottle shades rotate 320° to cast light directionally.

Materials

Shades: Powder coated aluminum Ceiling mount: Powder coated steel Frame: Plated steel Hub: Plated aluminum (for nickel finish) or brass (for brass finish) Drop: Stainless steel cable

Shade Color

Black Satin (ivory satin interior)
 Grey Gloss (ivory satin interior)
 Ivory Satin (ivory satin interior)
 White Satin (white satin interior)

Custom colors available.

Finish

Polished NickelBrushed Brass

Oil Rubbed Bronze

Custom finishes available.

Lamping (Three shades per tier)

120V: (3)A19 or A15 medium base 60W max 220-240V: (3)E27 base 60W max Note: Bulbs not included. Halogen bulbs not recommended.

IMPORTANT: Identical bulbs must be used in each socket in order for fixture to properly balance.

Wattage

180 watts max per tier

Weight

Weight varies; depending on number of tiers and dimensions. Each tier: approx. 8-10 lbs (3.6-4.5 kg)

Remarks


Specify drop length. Approx. 6" of extra cable and cord included.


Remarks continued

Specify number of tiers.
Each tier has three shades.
Specify tier diameter.
Ceiling mount consistent
with shade color.
White electrical cord is standard.
Additional weight support
recommended for junction
box installation.
Indoor use and dry locations only.

Dimensions

Fixture custom made based on client specifications.
Minimum diameter: 60" (152 cm)
Maximum diameter: 120" (305 cm)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height:
Single tier: 18.5" (47 cm)
Two tiers: 28" (71 cm)
Three tiers: 35" (89 cm)
Shade: 13.5" L x 7" W x 9" D
(34 L x 18 W x 23 cm D)

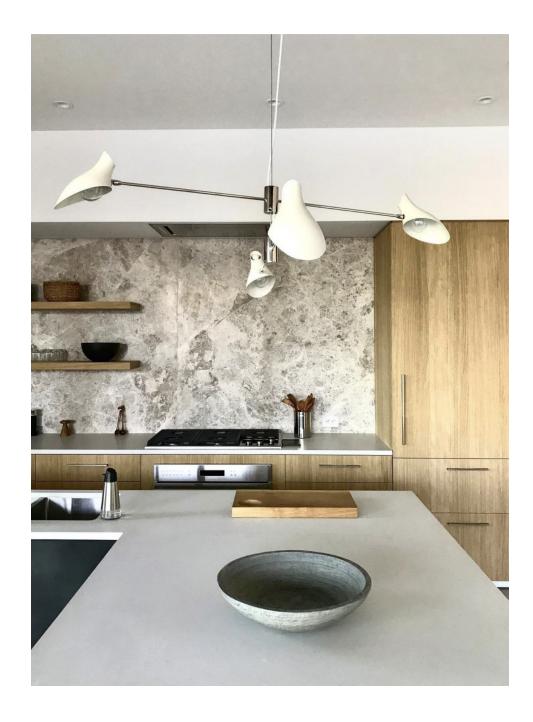

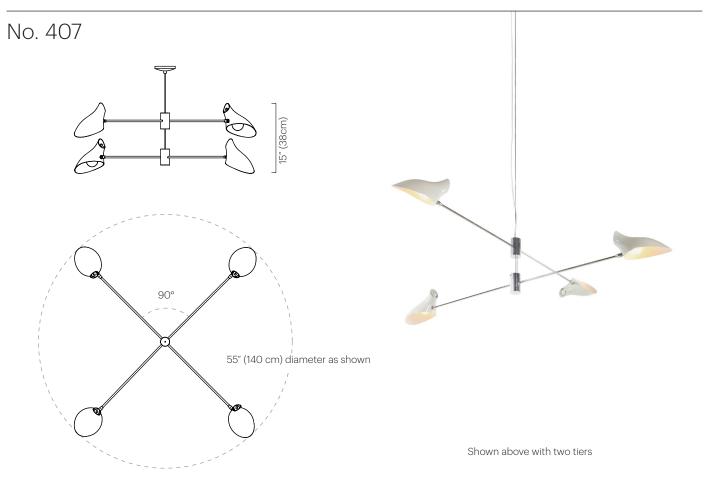

Description

The Bottle Tiered Pendant features a plated frame and hand spun Bottle shades that rotate 320° to cast light directionally. Customizable with longer or shorter tiers. Additional tiers can be added.

Materials

Shades: Powder coated aluminum Ceiling Mount: Powder coated steel Frame: Plated steel Hub: Plated aluminum and brass Drop: Stainless steel cable

Shade Color

Black Satin (ivory satin interior) Grey Gloss (ivory satin interior) Ivory Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Finish

O Polished Nickel

Brushed Brass Oil Rubbed Bronze

Custom finishes available.

Lamping (Two shades per tier)

120V: (2)A19 or A15 medium base 60W max 220-240V: (2)E27 base 60W max Note: Bulbs not included. Halogen bulbs not recommended.

IMPORTANT: Identical bulbs must be used in each socket in order for fixture to properly balance.

Wattage

120 watts max per tier

Weight

Weight varies; depending on number of tiers and dimensions. Two-tier fixture: approx. 9 lbs (4 kg)

Remarks

Specify drop length. Approx. 6" of extra cable and cord included. Specify tier length. Specify number of tiers.

Remarks continued

Two tier minimum (Four shades). Each tier has two shades. Ceiling mount consistent with shade color. White electrical cord is standard. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions


Standard tier length: 55" x 55" (140 x 140 cm) Tier length can be customized between 36 - 96" (91 - 244 cm) Ceiling mount diameter: 5" (13 cm) Standard distance between tiers: 7" (18 cm) Minimum overall height: 15" (38 cm) Shade: 8.5" H x 6" W 8.5" D (22 H x 15 W x 22 cm D)




Shell Collection

The Shell Series—a hand-sculpted expression of organic form. Warm, tactile, and inspired by nature, each hand-formed Shell is subtly imperfect and unique.

No. 206







Description

Featuring a hand-formed Shell shade, the Shell Sconce rotates 320 degrees to cast light directionally.

Materials

Shade: Powder coated aluminum Wall mount: Powder coated steel Hardware: Plated brass

Mount & Shade Color

Black Satin (ivory satin interior)
Grey Gloss (grey gloss interior)
Ivory Satin (ivory satin interior)

Hardware

O Polished Nickel Brushed Brass

Custom finishes available.

White Satin (white satin interior) 40W max

Custom colors available.

Oil Rubbed Bronze

Lamping

120V: G16.5 globe bulb candelabra base 40W max 220-240V: E14 base golf ball

Note: Bulbs not included. Halogen bulbs not recommended.

Wattage

40 watts max

Weight

5 lb (2.3 kg)

Remarks

UL listed. Hardwired is standard.
Custom cord & plug available; length approx 6'. Custom switch available on wall mount. Indoor use and dry locations only. Shade shape may vary slightly.

Dimensions

8" D x 4.5" H x 8" W (20 D x 11 H x 20 cm W) Wall mount diameter: 5" (13 cm) Shade (approx.): 3.5" H x 9" W x 6" D (9 H x 23 x 15 cm D)





436 Lapa Pendant + Custom Frame White Satin + Brushed Brass

Lapa Pendant

TECHNICAL SPECIFICATIONS

No. 436









Shade Color

The Lapa is a balanced fixture comprised of 22 shell shades. Each shade is hand-formed in our Brooklyn studio, and can rotate 320°to cast light directionally.

Materials

Description

Frame: Plated steel Shades: Powder coated aluminum Drop: Plated steel

Grey Gloss (grey gloss interior)

Ivory Satin (ivory satin interior)

Black Satin (ivory satin interior) White Satin (white satin interior)

Custom colors available.

Frame Color

Brushed Brass Polished Nickel

Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: (22)G16.5 globe bulb candelabra base 15W max 220-240V: (22)E14 base golf ball 15W max

Note: Bulbs not included. Halogen bulbs not recommended.

Wattage

330W max

Weight


25 lbs (11.5 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Ceiling mount consistent with shade color. Arm lengths not adjustable.
Additional weight support recommended for junction

box installation. Indoor use and dry locations only.

Dimensions26.5" Dia x 31" H
(67 Dia x 79 cm H)
Minimum overall height: 34" Shell Shade (approx.): 3.5" H x 9" W x 6" D (9 H x 23 W x 15 cm D)





No. 122



Description

The Whiplash Desk Lamp features a cylindrical cement cast base. The hand formed brass arm is secured by a brass dowel. The fixture has a single glass Whiplash shade, each shade is hand blown and illuminated by a dimmable LED. Shade can be faced up or down, specify shade orientation.

Materials

Shade: Glass
Base: Cement
Frame: Plated brass
Hardware: Plated and polished brass

Shade Color

Black Ombre

Base Color Cement

Finish

Oil Rubbed BronzeCustom finishes available.

Lamping

LED: Warm white 2700K Lumens: 700 (equivalent to one 60W incandescent bulb) CRI: 90+ 70,000 LED life hours (approx.)

Voltage / Wattage 24V / 7W

Weight 11 lbs (5 kg)

Remarks

Shade does not rotate after install. Specify shade orientation. Cord color is black; length approx. 7 feet. Dimmer switch located on cord. Indoor use and dry locations only.

Dimensions

Fixture dimensions: 24.5"L x 7" W x 17.5"H (62 L x 18 W x 44 cm H) Shade: 7" Ø x 6" H (18 Ø x 15 cm H)

_ _



Whiplash Pendant

TECHNICAL SPECIFICATIONS

No. 460 22.5" (57 cm)

Description

The Whiplash Pendant is a balanced fixture on an asymmetrical axis, which allows gentle movement. The fixture has one glass Whiplash shade, Ceiling Mount Color each shade is hand blown and illuminated by a dimmable LED. The fixture can rotate 245° from the canopy.

Materials

Shade: Glass Ceiling mount: Powder coated aluminum and steel. Frame: Plated brass Drop: Plated brass Hardware: Plated and polished brass

Shade Color

○ White Ombre Black Ombre

White Satin

Custom colors available.

Finish

Brushed Brass Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K Lumens: 700 (equivalent to one 60W incandescent bulb) 70,000 LED life hours (approx.)

Power Supply

10W 24V For 120V areas: dimmable Class 2 included in canopy. For 220-240V areas: dimmable Class 2 included in canopy.

Dimmer Compatibility

For 120V areas: 0-10V, TRIAC, ELV dimmable For 220-240V areas: 0-10V, ELV (only at 230V) dimmable

Voltage / Wattage 24V / 7W

Weight 8 lbs (3.5 kg)

Remarks Each fixture is handmade and therefore may vary up to 2" in overall height due to the counterbalancing nature.


Remarks Continued


Specify drop length. Arm and frame lengths are fixed. Fixed drop not adjustable on site. Shade does not rotate. Specify shade orientation. Not for use on sloped ceilings. Black exterior electrical cord is standard. Hardware finish consistent with frame finish. Specify ceiling mount color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions

Fixture dimensions: 22.5"L x 8" W x 39.5"H (57 L x 20 W x 100 cm H) Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H) Minimum overall height: 49.5" (126 cm) Shade: 8" Ø x 7" H (20 Ø x 18 cm H)









Description

The Whiplash Tiered Pendant is a balanced fixture comprised of asymmetrical curves. The fixture has four glass Whiplash shades, each shade is hand blown and illuminated by a dimmable LED. The fixture can rotate 245° from the canopy.

Materials

Shade: Glass
Ceiling mount: Powder coated
aluminum and steel.
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Shade Color

White Ombre
Black Ombre

Ceiling Mount Color

Black Satin
White Satin

Custom colors available.

Finish

Brushed BrassOil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K Lumens: 2800 (equivalent to four 60W incandescent bulb) CRI: 90+ 70,000 LED life hours (approx.)

Power Supply

40W 24V For 120V areas: dimmable Class 2 included in canopy. For 220-240V areas: dimmable Class 2 included in canopy.

Dimmer Compatibility

For 120V areas: 0-10V, TRIAC & ELV dimmable For 220-240V areas: 0-10V dimmable

Voltage / Wattage 24V / 28W

Weight

20 lbs (9 kg)

Remarks
Each fixture is handmade and therefore may vary up to 2" in overall height due to the counterbalancing nature.


Remarks Continued

Specify drop length. Arm and frame lengths are fixed. Fixed drop not adjustable on site. Shade does not rotate. Specify shade orientation. Not for use on sloped ceilings. Black exterior electrical cord is standard. Hardware finish consistent with frame finish. Specify ceiling mount color. Additional weight support recommended for junction box installation. Indoor use and dry locations only. Five tier maximum.

Dimensions

Fixture diameter: 35.5" (90 cm)
Fixture height: 48" (122 cm)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Minimum overall height: 58.5" (149 cm)
Shade: 7" Ø x 6" H
(18 Ø x 15 cm H)




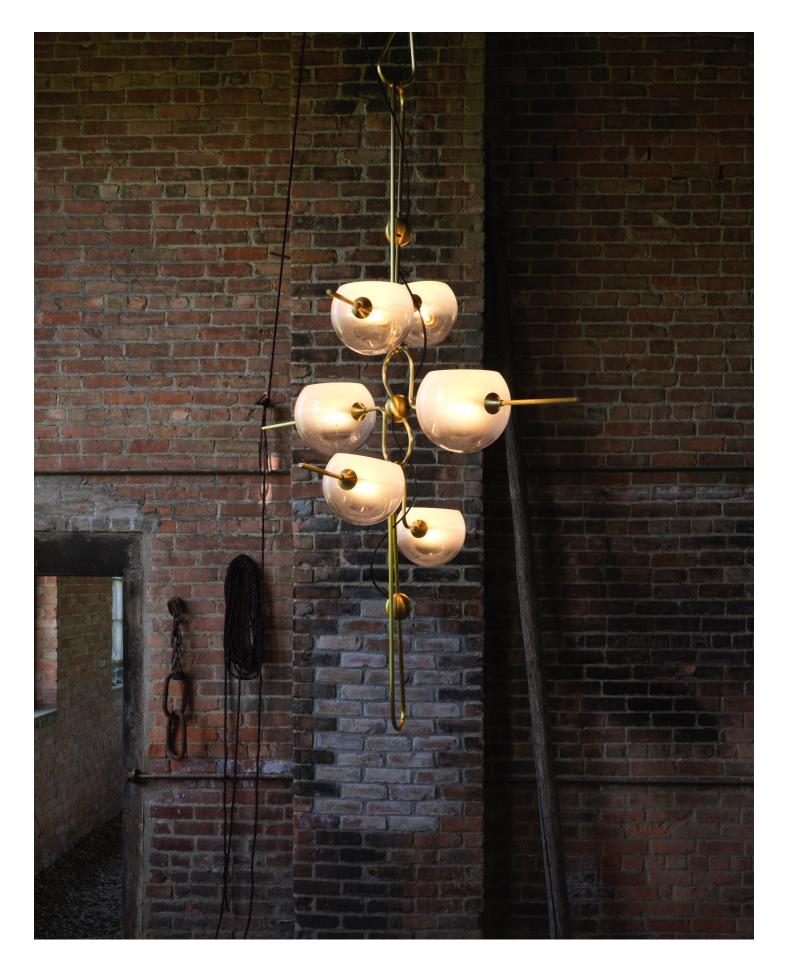



Whiplash Tiered Pendant, 3 Tier

TECHNICAL SPECIFICATIONS

No. 461





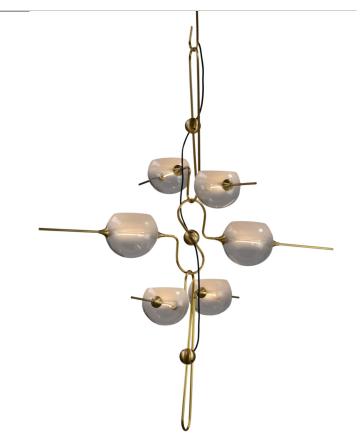

Description

The Whiplash Tiered Pendant is a balanced fixture comprised of asymmetrical curves. The fixture has six glass Whiplash shades, each shade is hand blown and illuminated by a dimmable LED. The fixture can rotate 245° from the canopy.

Materials

Shade: Glass Ceiling mount: Powder coated aluminum and steel. Frame: Plated brass Drop: Plated brass Hardware: Plated and polished brass

Shade Color

O White Ombre Black Ombre

Ceiling Mount Color

Black Satin White Satin

Custom colors available.

Finish

Brushed Brass Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K Lumens: 4200 (equivalent to six 60W incandescent bulb) 70,000 LED life hours (approx.)

Power Supply

40W 24V For 120V areas: dimmable Class 2 included in canopy. For 220-240V dimmable Class 2 included in canopy.

Dimmer CompatibilityFor 120V areas: 0-10V, TRIAC & ELV For 220-240V areas: 0-10V dimmable

Voltage / Wattage 24V / 39W

Weight 30 lbs (13.5 kg)

Remarks

Each fixture is handmade and therefore may vary up to 2" in overall height due to the counterbalancing nature. Specify drop length. Arm and frame lengths are fixed. Fixed drop not adjustable on site. Shade does not rotate.


Remarks Continued


Specify shade orientation. Not for use on sloped ceilings. Black exterior electrical cord is standard. Hardware finish consistent with frame finish. Specify ceiling mount color. Additional weight support recommended for junction box installation. Indoor use and dry locations only. Five tier maximum.

Dimensions

Fixture diameter: 44" (112 cm) Fixture height: 58.5" (149 cm) Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H) Minimum overall height: 69" (175 cm) Small Shade: 7" Ø x 6" H (18 Ø x 15 cm H) Large Shade: 8" Ø x 7" H (20 Ø x 18 cm H)









Description

The Whiplash Chain Pendant is a balanced fixture on an asymmetrical axis, which allows gentle movement. The fixture has two glass Whiplash shades, each shade is hand blown and illuminated by a dimmable LED. The fixture can rotate 245° from the canopy.

Materials

Shade: Glass Ceiling mount: Powder coated aluminum and steel. Frame: Plated brass Drop: Plated brass Hardware: Plated and polished brass

Shade Color

White Ombre Black Ombre

Ceiling Mount Color

Black Satin White Satin

Custom colors available.

Finish

Brushed Brass Oil Rubbed Bronze

Custom finishes available.

Lamping LED: Warm white 2700K Lumens: 1400 (equivalent to two 60W incandescent bulb) 70,000 LED life hours (approx.)

Power Supply

20W 24V For 120V areas: dimmable Class 2 included in canopy. For 220-240V areas: dimmable Class 2 included in canopy.

Dimmer Compatibility

For 120V areas: 0-10V, TRIAC & ELV dimmable For 220-240V areas: 0-10V, EVL (only at 230V) dimmable

Voltage / Wattage

Weight 10 lbs (4.5 kg)

Remarks

Each fixture is handmade and therefore may vary up to 2" in overall height due to the counterbalancing nature.

Remarks Continued


Specify drop length. Arm and frame lengths are fixed. Fixed drop not adjustable on site. Shade does not rotate. Specify shade orientation. Specify number of tiers. Five tier maximum. Each tier has two shades. Not for use on sloped ceilings. Black exterior electrical cord is standard. Hardware finish consistent with frame finish. Specify ceiling mount color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.


Fixture diameter: 44" (112 cm) Fixture height: 11.5" (29 cm) Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H)
Minimum overall height: 24" (61 cm)
Shade: 8" Ø x 7" H (20 Ø x 18 cm H)

Whiplash Chain Pendant, 3 Tier

TECHNICAL SPECIFICATIONS

No. 462







Description The Whiplash Chain Pendant is a balanced fixture comprised of linked curves. The fixture has six glass Whiplash shades, each shade is hand blown and illuminated by a dimmable LED. The fixture can rotate 245° from the canopy. The quantity of the tiers can be specified.

Materials

Shade: Glass Ceiling mount: Powder coated aluminum and steel. Frame: Plated brass Drop: Plated brass Hardware: Plated and polished brass

Shade Color

White Ombre Black Ombre

Ceiling Mount Color

Black Satin) White Satin

Custom colors available.

Brushed Brass Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K Lumens: 4200 (equivalent to six 60W incandescent bulb) 70,000 LED life hours (approx.)

Power Supply

40W 24V For 120V areas: dimmable Class 2 included in canopy. For 220-240V areas: dimmable Class 2 included in canopy.

Dimmer Compatibility

For 120V areas: 0-10V, TRIAC & ELV dimmable For 220-240V areas: 0-10V dimmable

Voltage / Wattage 24V / 39W

Weight 30 lbs (13.5 kg)

Remarks

Each fixture is handmade and therefore may vary up to 2" in overall height due to the counterbalancing nature. Specify drop length. Arm and frame lengths are fixed. Fixed drop not adjustable on site.

Remarks Continued

Shade does not rotate. Specify shade orientation. Specify number of tiers. Five tier maximum. Each tier has two shades. Not for use on sloped ceilings. Black exterior electrical cord is standard. Hardware finish consistent with frame finish.
Specify ceiling mount color.
Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions

Fixture diameter: 44" (112 cm)
Fixture height: 32.5" (83 cm)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H) Minimum overall height: Three Tier: 43" (109 cm) Two Tier: 34" (86 cm) Single Tier: 24" (61 cm) Shade: 8" Ø x 7" H (20 Ø x 18 cm H)

David Weeks Studio works alongside architects, interior designers, and private clients to construct experience and define space with singular expression.

Our made-to-order production process allows us to offer customizations on much of our lighting collections. Our team will be happy to guide you through the process and estimate any project, whether you're looking for made-to-measure dimensions or a custom color statement. The studio offers a full custom design service that extends beyond the scope of our existing collections. Please contact our sales department for more details.

Call us at (212) 966 3433
Email us at sales@davidweeksstudio.com
Follow us @davidweeksstudio
Find out more at www.davidweeksstudio.com

David Weeks Studio