




David
Weeks
Studio



Handmade in New York since 1996.


David Weeks Studio is a design studio based in Brooklyn NY. Founded by designer David Weeks in 1996, the studio is renowned for its large-scale sculptural lighting. We are committed to the act of making, much of the work is made by hand by our talented team of designers, engineers, and artisans. The process marries an artist's sensibility with technical precision. Each fixture is unique and designed to last for generations. We design and produce lighting and products that are highly regarded and sought after by our clients, designers, and architects around the world.

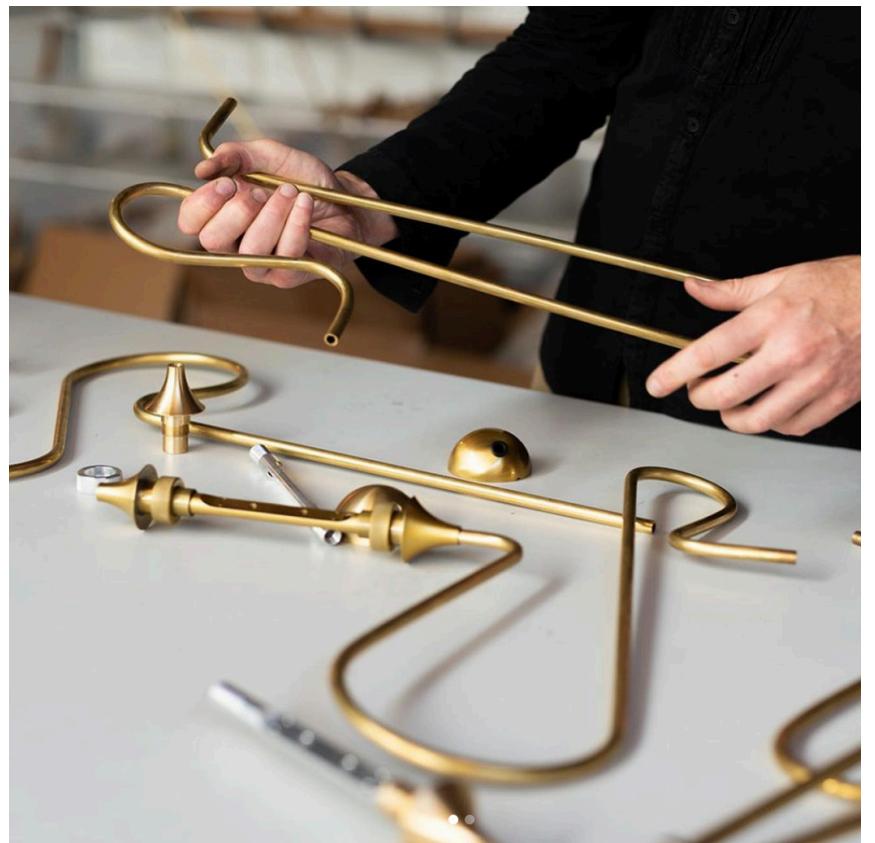



Widely regarded as the founding father of North American lighting design, David Weeks has been a pioneering figure in Brooklyn's burgeoning independent design movement since his studio's early roots in Dumbo. His genre-defining work is the result of a distinctly hands-on, sculptural process that explores scale and proportion, balance, and movement.



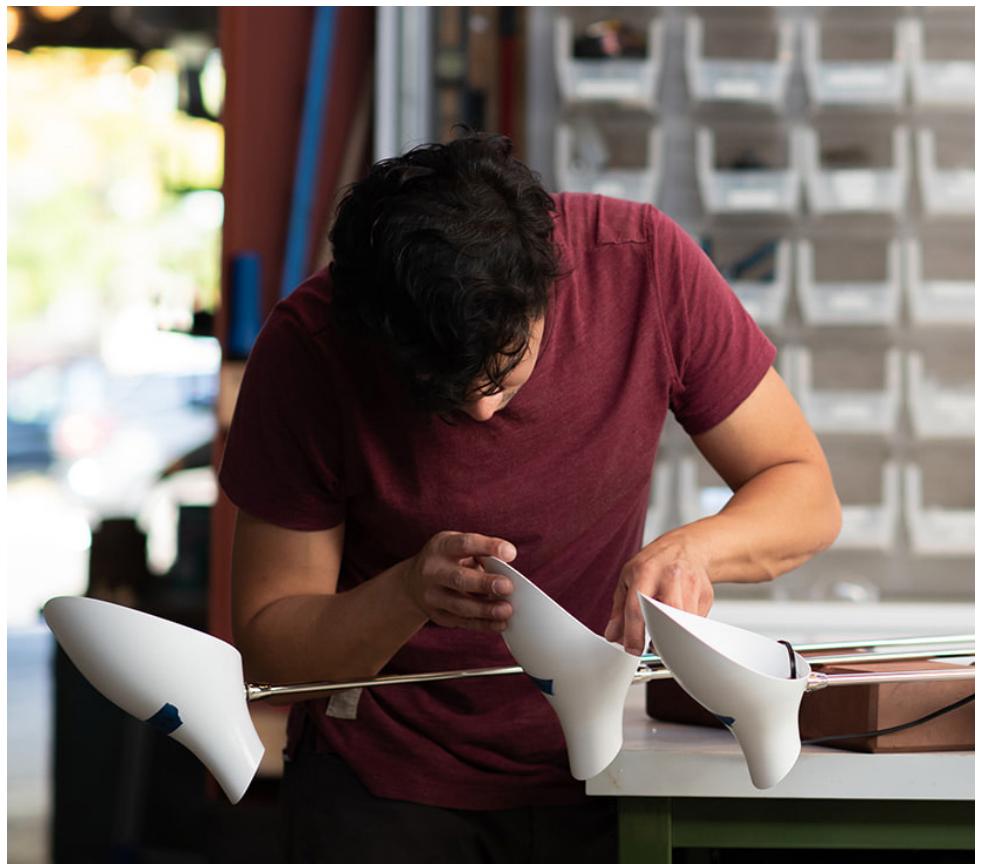


Precision design, made to measure.

David Weeks Studio works alongside architects, interior designers, and private clients to construct experience and define spaces. Our made-to-order production process allows us to offer customizations on much of our lighting collections. Whether you're looking for unique dimensions or a custom color statement, our team will be happy to guide you through the process and estimate any project. The studio offers a full custom design service that extends beyond the scope of our existing collections.

Meet with our team to learn more about our custom capabilities.



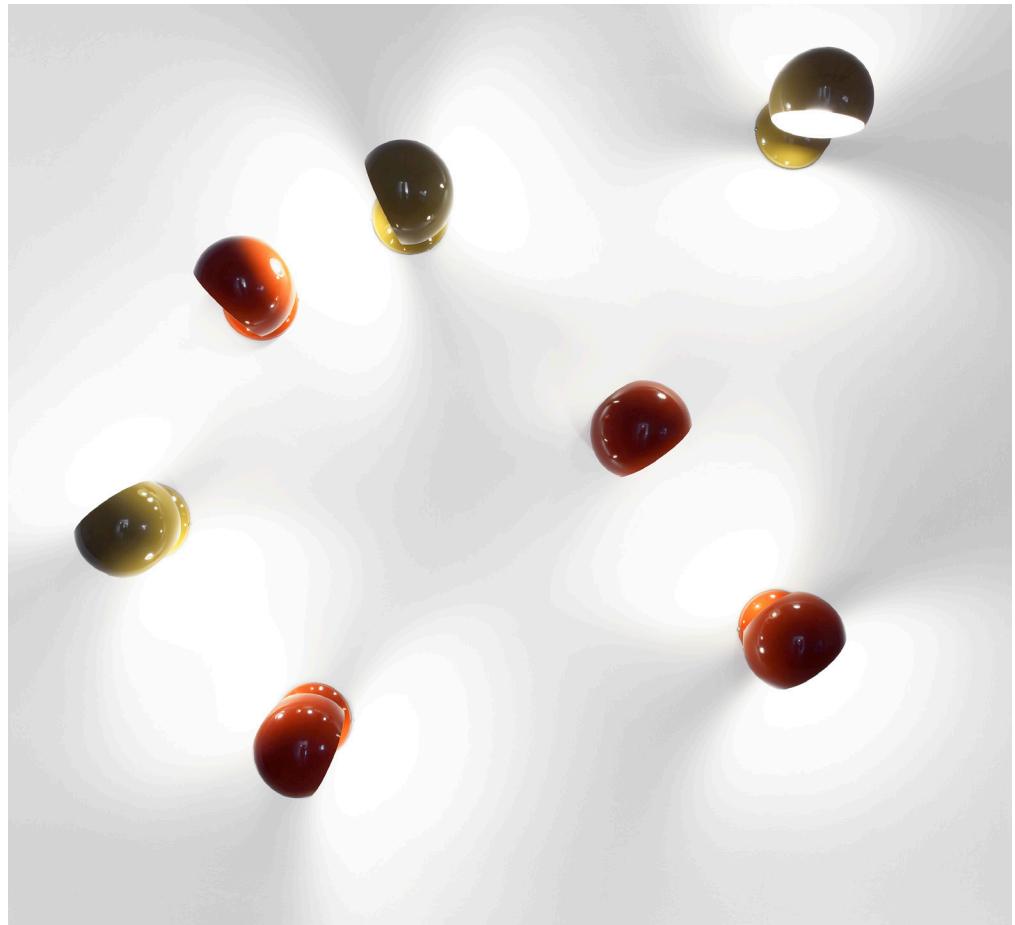

Made slow, shipped quick.

DWS Quickship program offers our best-loved designs, ready to ship and delivered within 2-3 weeks. Quick Ship items are handmade in Brooklyn with the same care as our made-to-order items but feature fixed dimensions in our most requested colors and finishes.



Collections

Boi
Boi Cluster
Hennen
OTTO
Treble
Sarus
Torrøja
Bottle + Bullet
Shell
Whiplash

Boi Collection

Boi brightens up serious design with an iconic form that gives an ebullient nod to 1960's pop design. Great in pairs and even better in multiples, it spills light from curved shapes, and casts patterns onto surrounding walls.







Big Boi Sconce

No. 214

TECHNICAL SPECIFICATIONS

Quickship

Select finishes and colors available.

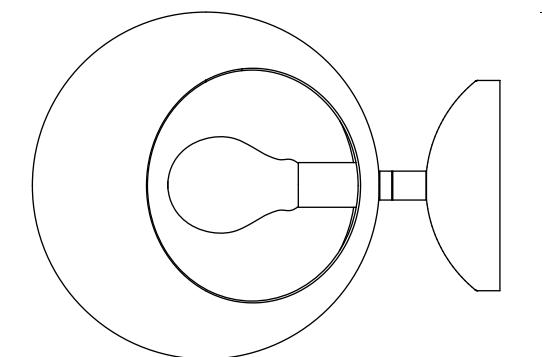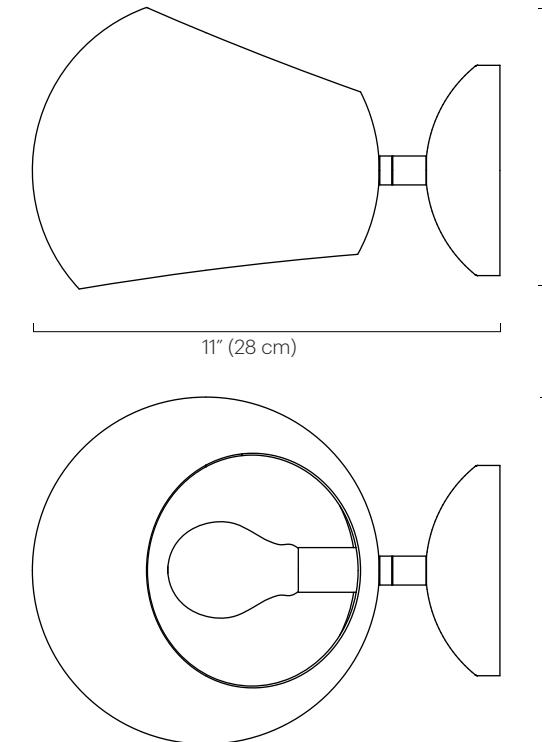

Description
Featuring a large Boi shade with openings at both the top and the bottom, the Big Boi Sconce allows light to flow through the entirety of the fixture. The shade rotates 320° to cast light directionally.

Materials
Shade: Powder coated steel
Wall mount: Powder coated steel
Hardware: Plated brass

Custom colors available.

Custom finishes available.

Mount & Shade Color

- Black Gloss (black gloss interior)
- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- Orange Gloss (ivory satin interior)
- White Gloss (white gloss interior)
- White Satin (white satin interior)

Custom finishes available.

Hardware

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping
120V: A19 or A15
medium base 60W max
220-240V: E27 base 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage
60 watts max

Weight
5 lbs (2.3 kg)

Remarks
UL listed.
Hardwired is standard.
Custom cord & plug available;
length approx 6'.
Custom switch available
on wall mount.
Indoor use and dry locations only.


Dimensions
11" D x 8.25" W x 6.5" H
(28 D x 21 W x 17 cm H)
Wall mount diameter: 5" (13 cm)
Shade: 8.25" Ø x 6.5" H
(21 Ø x 17 cm H)



Fenta Table Lamp

No. 121

TECHNICAL SPECIFICATIONS

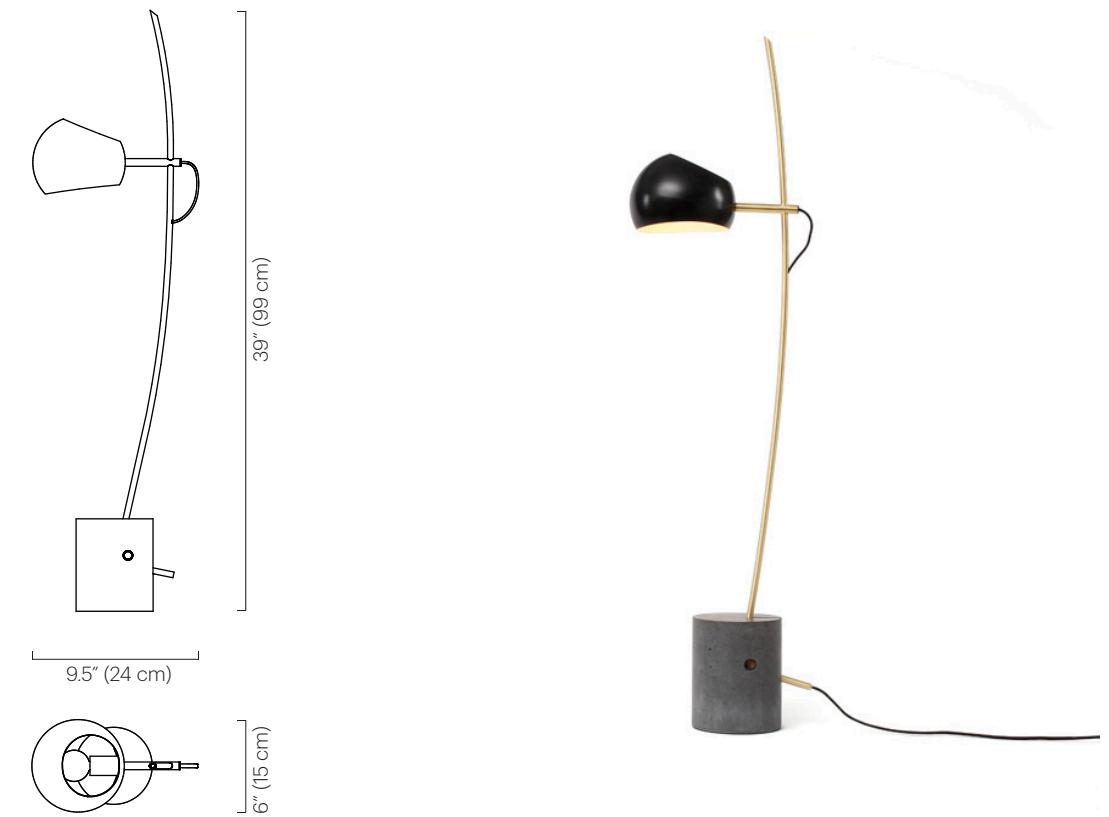

Description

The Fenta Desk Lamp features a cylindrical cement cast base. The hand formed brass arm is secured by a wooden dowel. The Boi shade has two openings casting light both up and down.

Materials

Shade: Powder coated steel
 Frame: Plated brass
 Base: Cement
 Dowel: Hardwood

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Base Color

- Cement

Finish

- Brushed Brass
- Polished Nickel
- Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: G16.5 globe bulb
 candelabra base 60W max
 220-240V: E14 base golf ball
 60W max
 Note: Bulbs not included.
 Halogen bulbs not recommended.

Wattage

60 watts max

Weight

10 lbs (4.5 kg)

Remarks

UL listed.
 On/Off switch located on cord.
 Cord color is black;
 length approx. 7 feet.
 Fixed shade does not swivel.
 Indoor use and dry locations only.

Dimensions

9.5" D x 6" W x 39" H
 (24 D x 15 W x 99 cm H)
 Base: 5" Ø x 6" H
 (13 Ø x 15 cm H)
 Shade: 6" Ø x 5.5" H
 (15 Ø x 14 cm H)



Fenta Standing Lamp

No. 317

TECHNICAL SPECIFICATIONS



Description
The Fenta lamp features a cylindrical cement cast base. The hand formed brass arm is secured by a wooden dowel. The Boi shade has two openings casting light both up and down.

Materials
Shade: Powder coated steel
Frame: Finished brass
Base: Cement
Dowel: Hardwood

Shade Color
 Black Satin (ivory satin interior)
 Grey Gloss (grey gloss interior)
 Ivory Satin (ivory satin interior)
 White Satin (white satin interior)

 Custom colors available.

Base Color
 Cement

Finish
 Polished Nickel
 Brushed Brass
 Oil Rubbed Bronze

 Custom finishes available.

Lamping
120V: G16.5 globe bulb
candelabra base 60W max
220-240V: E14 base golf ball
60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage
60 watts max

Weight
20 lbs (9 kg)

Remarks
UL listed.
Dimmer switch located on cord.
Cord color is black;
length approx. 10 feet.
Fixed shade does not swivel.
Indoor use and dry locations only.


Dimensions
13" D x 7.5" W x 70" H
(33 D x 19 W x 178 cm H)
Base: 6"Ø x 9" H
(15 Ø x 23 cm H)
Shade: 7.5" Ø x 6" H
(19 Ø x 15 cm H)



Boi Tiered Pendant

No. 418

TECHNICAL SPECIFICATIONS

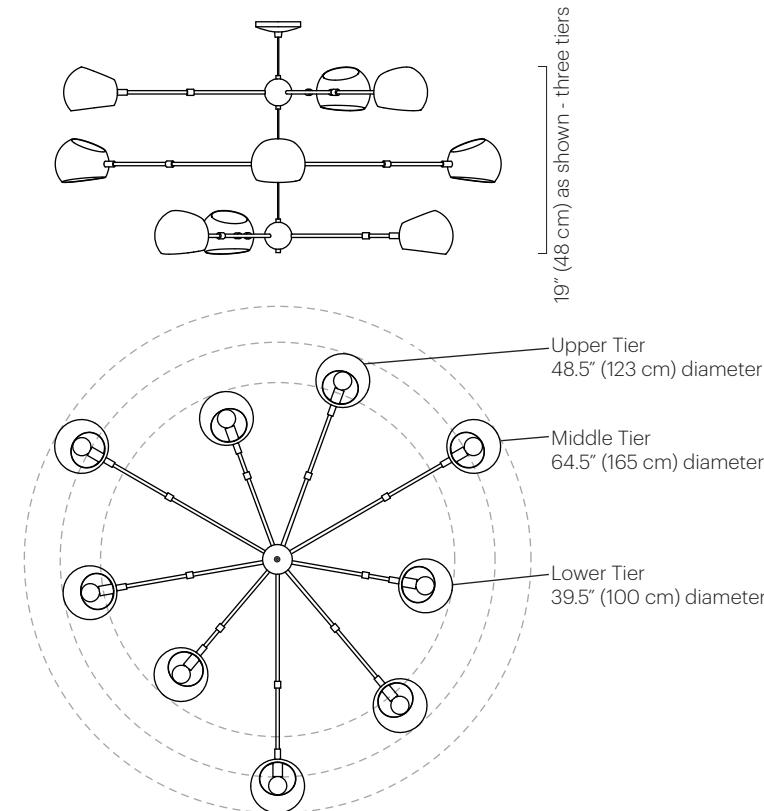

Shown above with three tiers

Description

The Boi Tiered Pendant is a highly customizable fixture, offering an expanding number of tiers with varying dimensions. Each tier has three arms made of plated steel and rotating Boi shades with openings at the top and bottom. Shades rotate 320° to cast light directionally.

Materials

Shades: Powder coated steel
 Ceiling mount: Powder coated steel
 Frame: Plated steel
 Hubs: Plated brass
 Drop: Stainless steel cable

Custom finishes available.

Shade Color

- Black Gloss (black gloss interior)
- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- Orange Gloss (ivory satin interior)
- White Gloss (white gloss interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping (Three shades per tier)

120V: (3)G16.5 globe bulb
 candelabra base 60W max
 220-240V: (3)E14 base golf ball
 60W max
 Note: Bulbs not included.
 Halogen bulbs not recommended.

Wattage

180 watts max per tier

Weight

Weight varies; depending on
 number of tiers and dimensions.
 3-tier fixture: approx. 15 lbs (7 kg)

Remarks

Specify drop length.
 Approx. 6" of extra cable
 and cord included.
 Specify number of tiers.
 Two tier minimum (six shades).
 Each tier has three shades.
 Tiers may be specified with
 different diameters.

Remarks continued

Ceiling mount consistent
 with shade color.
 White electrical cord is standard.
 Additional weight support
 recommended for junction
 box installation.
 Indoor use and dry locations only.

Dimensions

Tiers are available in four
 standard diameters:
 39.5" / 48.5" / 56.5" / 64.5"
 (100 cm / 123 cm / 144 cm / 164 cm)
 or specify custom tier diameters.
 Min. diameter of tier: 24" (61 cm)
 Max. diameter of tier: 72" (183 cm)
 Ceiling mount diameter: 5" (13 cm)
 Standard distance
 between tiers: 7" (18 cm)
 Minimum overall height:
 Two tiers: 13" (33 cm)
 Three tiers: 20" (51 cm)
 Shade: 6" Ø x 5.5" H
 (15 Ø x 14 cm H)




419 Boi Oval Pendant
Black Satin + Polished Nickel


Boi Oval Pendant

No. 419

TECHNICAL SPECIFICATIONS

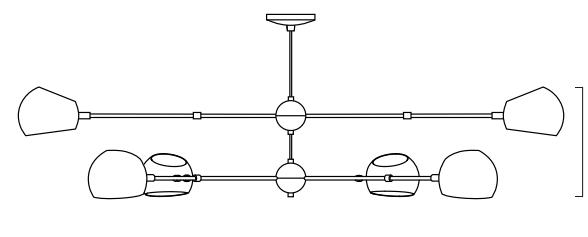

12" (30 cm) as shown

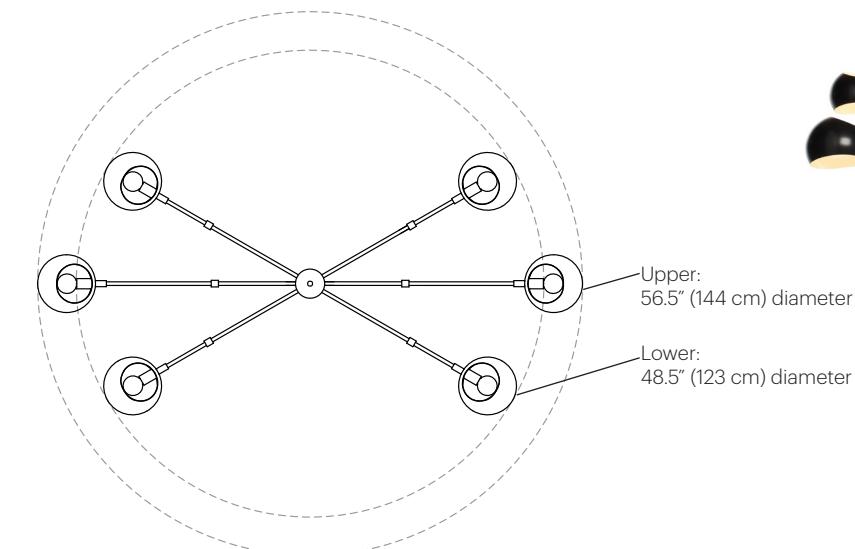

Description

The Boi Oval is a two tier fixture with six shades. The top tier has two shades, and the Bottom tier has four shades creating an oval shape when viewed from below. Shades rotate 320° to cast light directionally. Tiers are available in three diameters; they can also be customized to client specifications.

Materials

Shades: Powder coated steel
Ceiling mount: Powder coated steel
Frame: Plated steel
Hubs: Plated brass
Drop: Stainless steel cable

Custom finishes available.

Shade Color

- Black Gloss (black gloss interior)
- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- Orange Gloss (ivory satin interior)
- White Gloss (white gloss interior)
- White Satin (white satin interior)

Custom colors available.

Standard Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: (6)G16.5 globe bulb
candelabra base 60W max
220-240V: (6)E14 base golf ball
60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

360 watts max

Weight

Approx. 10 lbs (4.5 kg)

Remarks

Specify drop length.
Approx. 6" of extra cable and cord included.
Only available in two tiers.
Specify tier diameter.
Ceiling mount color matches specified shade.
White electrical cord is standard.

Remarks continued

Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions


Available in standard diameters:
Upper tier: 48.5" / 56.5" / 64.5"
(123 cm / 144 cm / 164 cm)
Lower tier: 39.4" / 48.5" / 56.5" / 64.5"
(100 cm / 123 cm / 144 cm / 164 cm)
or specify custom tier diameters.
Min. diameter of tier: 24" (61 cm)
Max. diameter of tier: 72" (183 cm)
Standard distance between tiers: 7" (18 cm)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height: 13" (33 cm)
Shade: 6" Ø x 5.5" H
(15 Ø x 14 cm H)



Boi Pendant Trio

No. 427

TECHNICAL SPECIFICATIONS

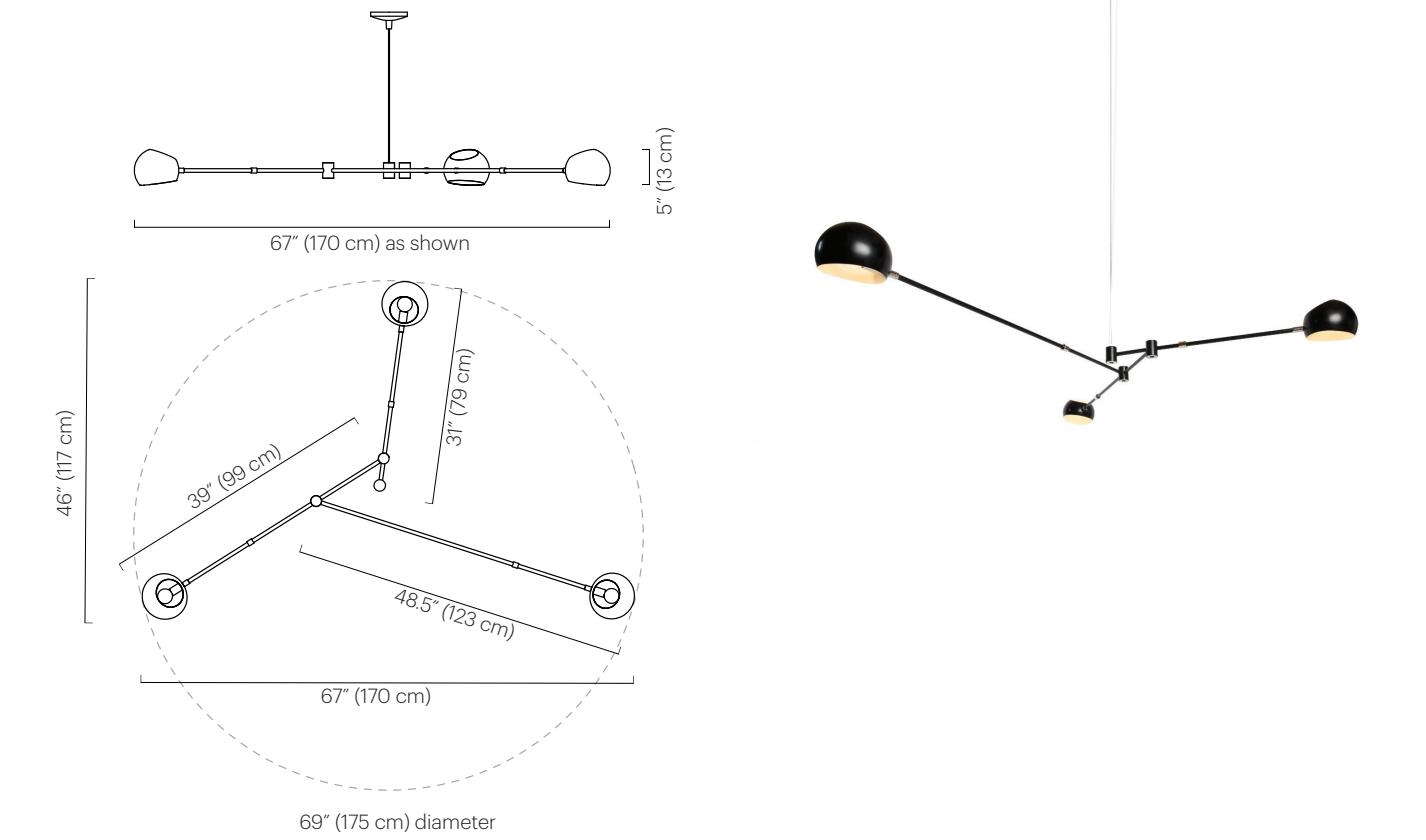

Description

The Boi Pendant Trio is an asymmetrical, balanced fixture with a Boi shade extending from each of its three arms. Shades rotate 320° to cast light directionally.

Materials

Shades: Powder coated steel
Frame: Powder coated steel
Ceiling mount: Powder coated steel
Drop: Stainless steel cable
Hardware: Plated steel and brass

Mount, Frame & Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Hardware

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

- 120V: (3)G16.5 globe bulb candelabra base 60W max 220-240V: (3)E14 base golf ball 60W max
- Note: Bulbs not included.
- Halogen bulbs not recommended.

Watage

- 180 watts max

Weight

- 10 lbs (4.5 kg)

Remarks

- Specify drop length.
- Approx. 6" of extra cable and cord included.
- Fixture size cannot be customized.
- Arm positions are fixed.
- Ceiling mount consistent with shade color.

Remarks continued

White electrical cord is standard. Hardware includes counterweights, swivels, and caps of hubs. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions


- Fixture diameter: 69" (175 cm)
- Fixture height: 5" (13 cm)
- Ceiling mount diameter: 5" (13 cm)
- Arm lengths: 48.5" / 39" / 31" (123 cm / 99 cm / 79 cm)
- Minimum overall height: 7" (18 cm)
- Shade: 6" Ø x 5.5" H (15 Ø x 14 cm H)



Boi Pendant Duo

No. 435

TECHNICAL SPECIFICATIONS

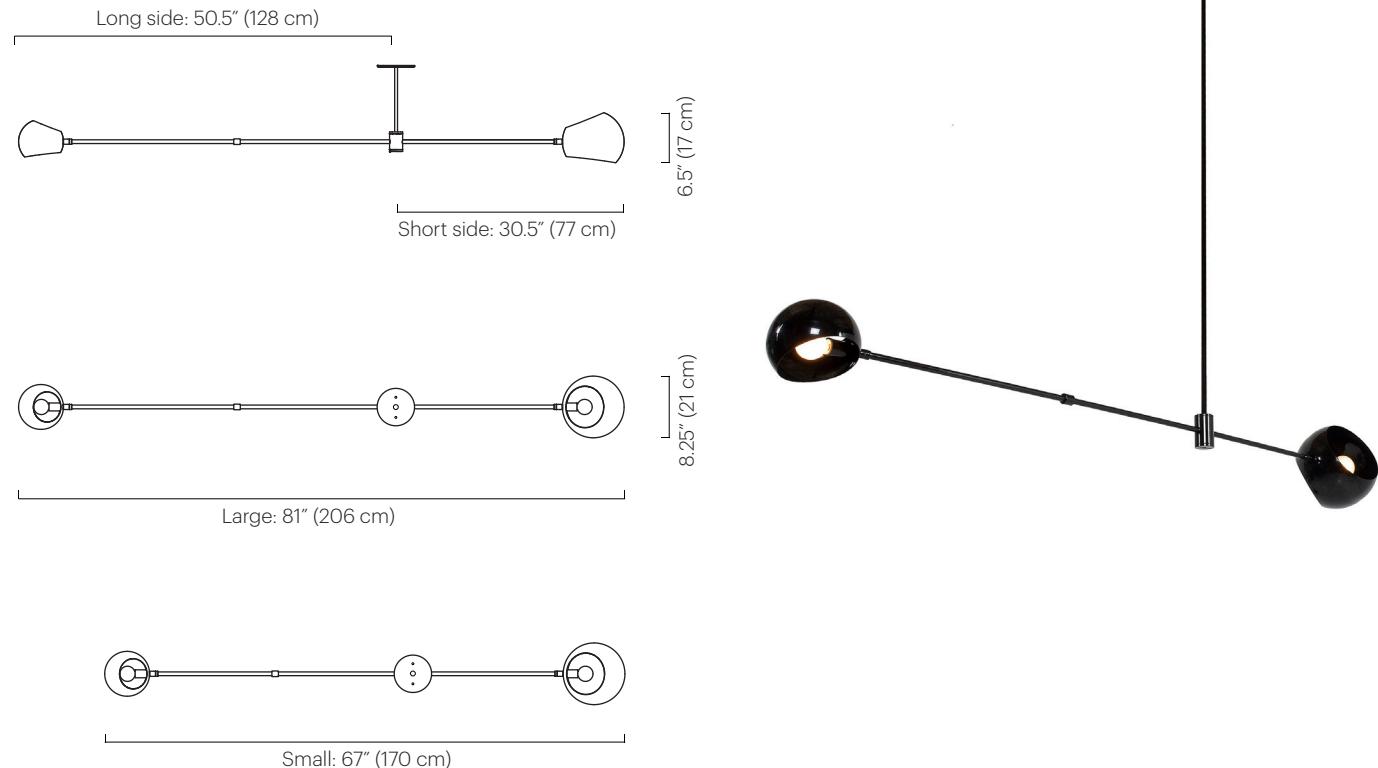

Description

The Boi Pendant Duo is an asymmetrical fixture comprised of one large and one small Boi shade. Shades rotate 320° to cast light directionally. The Pendant is offered in two sizes and also works well when installed in multiples.

Materials

Shades: Powder coated steel
 Frame: Powder coated steel
 Ceiling mount: Powder coated steel
 Drop: Powder coated steel

Mount, Frame & Shade Color

- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)
- White Gloss (white gloss interior)

Custom colors available.

Lamping

120V: (1)A19 or A15 medium base bulb and (1)G16.5 globe candelabra base bulb 60W max
 220-240V: (1)E27 base 60W max and (1)E14 base golf ball 60W max
 Note: Bulbs not included.
 Halogen bulbs not recommended.

Wattage

120 watts max

Weight

10 lbs (4.5 kg)

Remarks

Specify drop length.
 Fixed drop not adjustable on site.
 Specify fixture length.
 Additional weight support recommended for junction box installation.
 Indoor use and dry locations only.
 Specify number of tiers.

Dimensions

Fixture length options:
 Large: 81" (206 cm)
 Small: 67" (170 cm)
 Arm lengths from balance point:
 Large: long side: 50.5" (128 cm) / short side: 30.5" (77 cm)
 Small: long side: 43" (109 cm) / short side: 24" (61 cm)
 Ceiling mount diameter: 5" (13 cm)
 Minimum overall height: 6" (15 cm)
 Small shade: 6" Ø x 5.5" H (15 Ø x 14 cm H)
 Large Shade: 8.25" Ø x 6.5" H (21 Ø x 17 cm H)



Boi Cluster Collection


The Boi Cluster Collection arranges multiples in an energetic burst of expression. A dynamic arrangement of Boi shades creates a sculptural form that is at once both playful and timeless.



Kopra Standing Lamp

No. 316

TECHNICAL SPECIFICATIONS

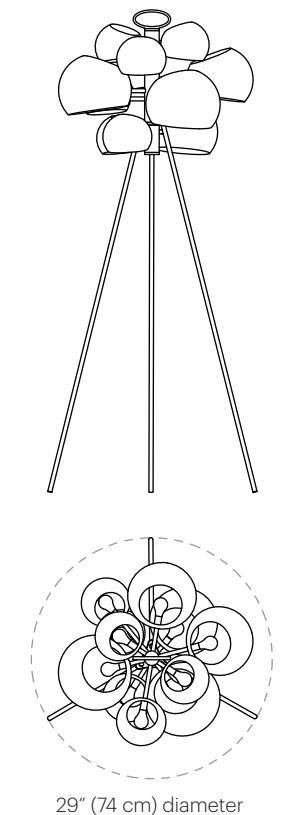

Description

The Kopra Standing lamp features eleven Boi shades of various sizes on a three legged frame topped with an oval handle. Each shade rotates 320° to cast light directionally.

Materials

Shades: Powder coated steel
Frame: Powder coated steel

Frame & Shade Color

- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)
- White Gloss (white gloss interior)

Custom colors available.

Lamping

120V: (11)G16.5 globe bulb, candelabra base
40W max, 20W recommended
220-240V: (11)E14 base golf ball
40W max, 20W recommended
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

440 watts max

Weight

25 lbs (11.3 kg)

Remarks

Not UL listed.
Dimmer switch located on cord.
Cord color is black;
length approx. 10 feet.
Indoor use & dry locations only.

Dimensions



Approx diameter: 29" (74 cm)
Height: 58" (147 cm)



Kopra Short Standing Lamp

TECHNICAL SPECIFICATIONS

No. 316

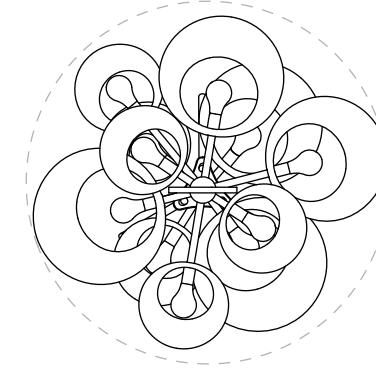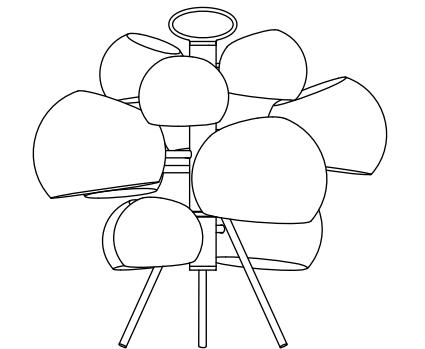

Description

The Kopra Short Standing lamp features eleven Boi shades of various sizes on a three legged frame topped with an oval handle. Each shade rotates 320° to cast light directionally.

Materials

Shades: Powder coated steel
Frame: Powder coated steel

Frame & Shade Color

- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)
- White Gloss (white gloss interior)

Custom colors available.

Lamping

120V: (11) G16.5 globe bulbs
candelabra base
40W max, 20W recommended
220-240V: (11) E14 base golf ball
40W max 20W recommended
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

440 watts max

Weight

20 lbs (9 kg)

Remarks

Not UL listed.
Dimmer switch located on cord.
Cord color is black;
length approx. 7 feet.
Indoor use and dry locations only.

Dimensions



Approx diameter: 24" (61 cm)
Height: 22.5" (57 cm)



Kopra Burst Pendant

TECHNICAL SPECIFICATIONS

No. 433

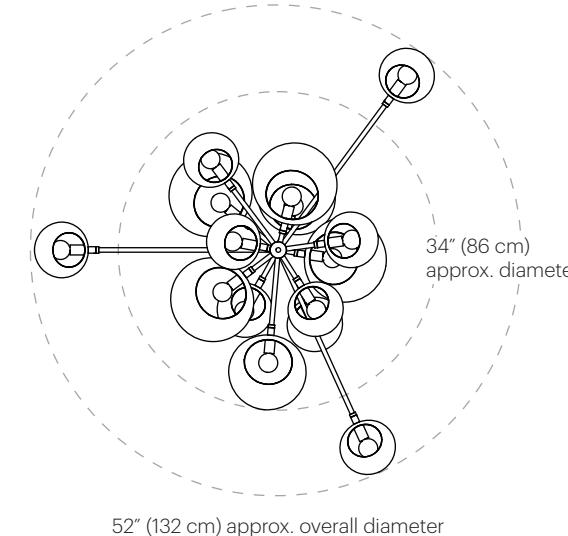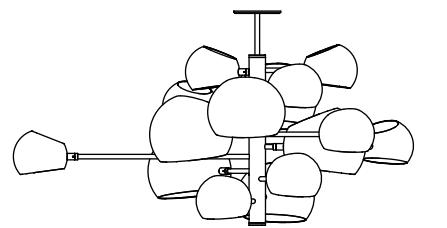

Description
The Kopra Burst is a balanced fixture comprised of fifteen Boi shades of various sizes. The fixture is available fully powder coated or with a plated frame and powder coated shades. Each shade rotates 320° to cast light directionally.

Materials
Shades: Powder coated steel
Frame: Powder coated or plated steel
Ceiling mount: Powder coated steel
Drop: Powder coated or plated steel

Mount & Shade Color
 Black Gloss (black gloss interior)
 Grey Gloss (grey gloss interior)
 White Gloss (white gloss interior)

Frame
 Brushed Brass
 Polished Nickel
 Oil Rubbed Bronze
 Black Gloss
 Grey Gloss
 White Gloss

 Custom colors and finishes available.

Lamping
120V: (15)G16.5 globe bulb
candelabra base
40W max, 20W recommended
220-240V: (15)E14 base golf ball
40W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage
600 watts max

Weight
25 lbs (11.3 kg)

Remarks
Specify drop length.
Fixed drop not adjustable on site.
Arm lengths are fixed.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.



Dimensions
Approx diameter: 52" (132 cm)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height: 22" (56 cm)



Kopra Pendant

TECHNICAL SPECIFICATIONS

No. 434

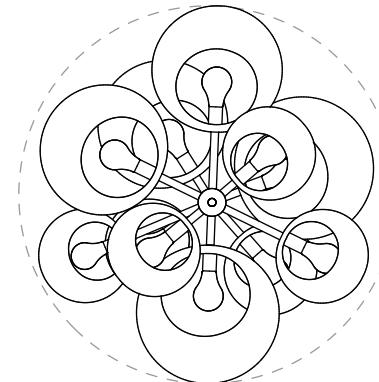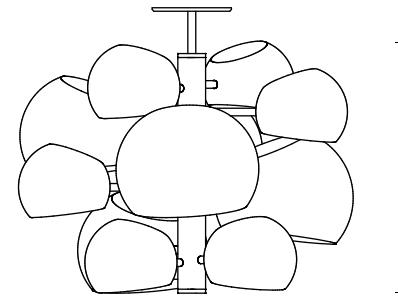

24" (61 cm) approx. diameter

Description

The Kopra Pendant is a balanced fixture comprised of eleven Boi shades of various sizes. The fixture is available fully powder coated or with a plated frame and powder coated shades. Each shade rotates 320° to cast light directionally.

Materials

Shades: Powder coated steel
 Frame: Powder coated or plated steel
 Ceiling mount: Powder coated steel
 Drop: Powder coated or plated steel

Mount & Shade Color

- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)
- White Gloss (white gloss interior)

Frame

- Brushed Brass
- Polished Nickel
- Oil Rubbed Bronze
- Black Gloss
- Grey Gloss
- White Gloss

Custom colors and finishes available.

Lamping

120V: (11)G16.5 globe bulb
 candelabra base
 40W max, 20W recommended
 220-240V: (11)E14 base golf ball
 40W max
 Note: Bulbs not included. Halogen bulbs not recommended.

Wattage

440 watts max

Weight

20 lbs (9 kg)

Remarks

Specify drop length.
 Fixed drop not adjustable on site.
 Arm lengths are fixed.
 Additional weight support recommended for junction box installation.
 Indoor use and dry locations only.

Dimensions

Approx diameter: 24" (61 cm)
 Ceiling mount diameter: 5" (13 cm)
 Minimum overall height: 19" (48 cm)



Hennen Collection

Resolutely minimalist, the Hennen Collection conveys precision through aeronautic dynamism. Hennen articulates the studio's language of formal reduction, through simple carved shades composed in two asymmetrical tiers.



430 Hennen Mobile
White Gloss + Polished Nickel


Hennen Mobile

No. 430

TECHNICAL SPECIFICATIONS

Quickship

Select finishes and colors available.

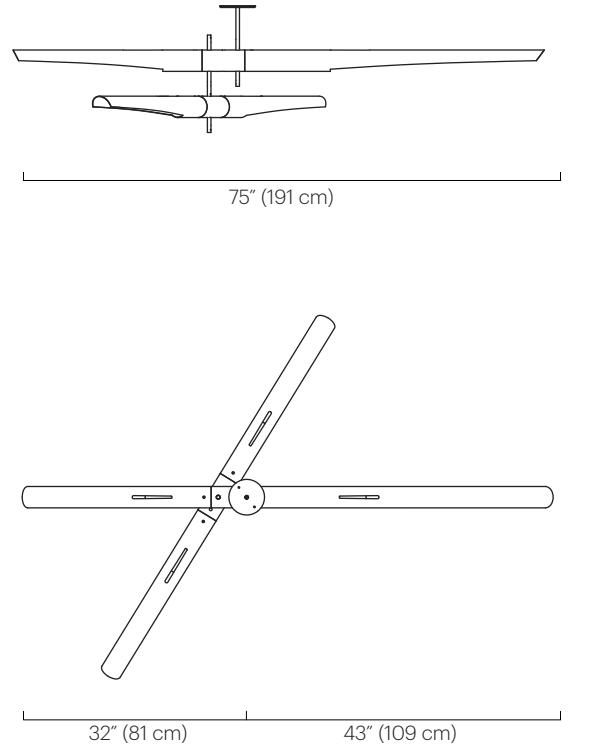

Description
The Hennen Mobile is a balanced fixture comprised of two offset tiers with a total of three short and one long shade that can be set to cast light up or down. Tiers scissor open when installed and arrangement is adjustable on site.

Materials
Shades: Powder coated aluminum
Frame: Plated steel & aluminum
Ceiling mount: Powder coated steel
Drop: Plated steel

Shade Color
 White Gloss (white gloss interior)
 Black Gloss (black gloss interior)
 Grey Gloss (grey gloss interior)
Custom colors available.

Finish
 Polished Nickel
 Brushed Brass
 Oil Rubbed Bronze
Custom colors available.

Lamping
120V: (4)T10 incandescent tubular medium base 60W max
220-240V: (4)E27 base (tubular 32mm suggested) 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Tala T38 LED Bulb
(Available per request)
110-120V/- 6W/ 420 lm/ 3000K
T38, E26
3.7" L x 4.7" Ø
ETL

Wattage
240 watts max

Weight
15 lbs (6.8 kg)

Remarks
Specify drop length.
Fixed drop not adjustable on site.
Tier lengths cannot be customized.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.


Dimensions
Upper tier: 75" (191 cm)
Lower tier: 59" (150 cm)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height: 14.5" (37 cm)
Long shade: 3" Ø x 42" L
(8 Ø x 107 cm L)
Short shade: 3" Ø x 26.5" L
(8 Ø x 67 cm L)



Hennen Pendant

TECHNICAL SPECIFICATIONS

No. 431

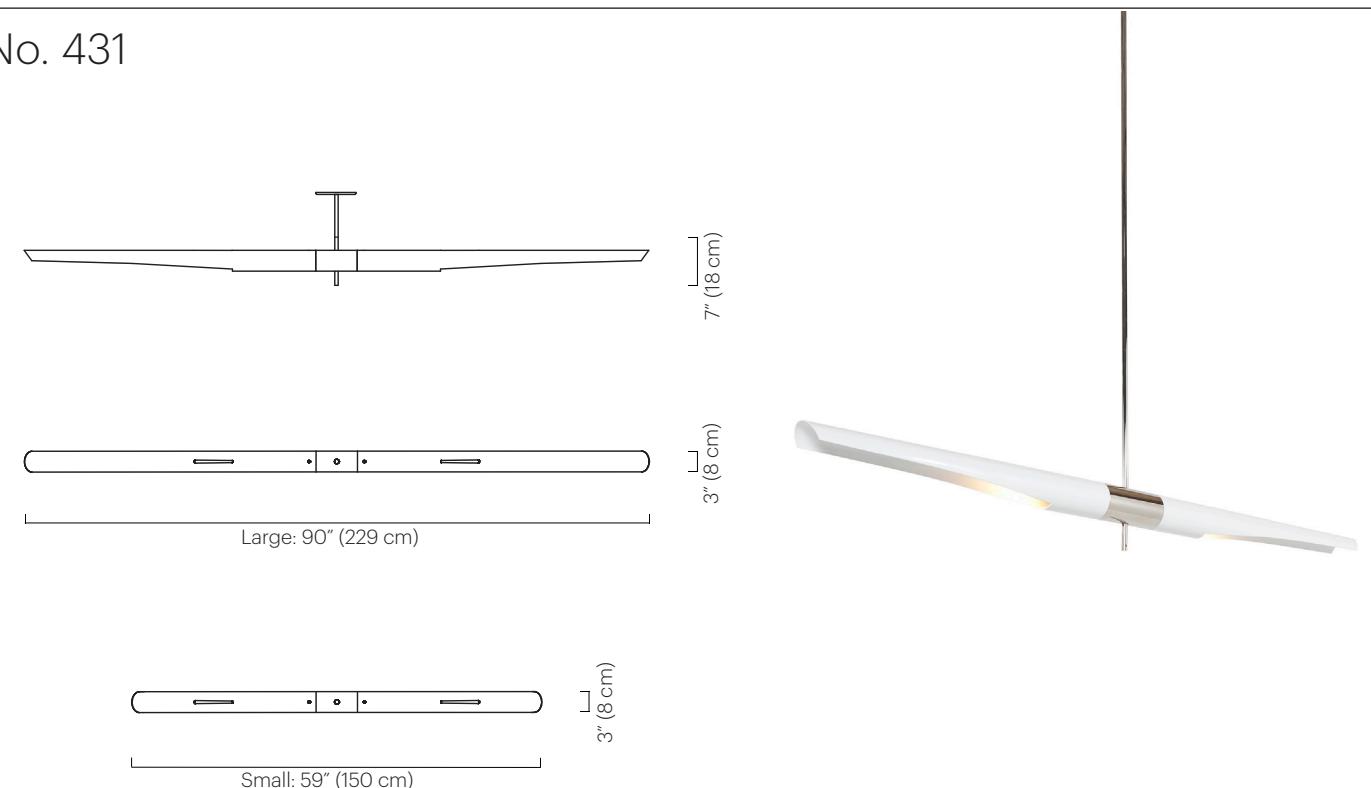

Description

The Hennen Pendant is comprised of two shades suspended from a central drop. The Solo is offered in two sizes, each shade can be set to cast light up or down. This fixture also works well when installed in multiples.

Materials

Shades: Powder coated aluminum
 Frame: Plated steel & aluminum
 Ceiling mount: Powder coated steel
 Drop: Plated steel

Custom colors available.

Finish

○ Polished Nickel
 ● Brushed Brass
 ■ Oil Rubbed Bronze

Custom colors available.

Shade Color

○ White Gloss (white gloss interior)
 ● Black Gloss (black gloss interior)
 ■ Grey Gloss (grey gloss interior)

Custom colors available.

Lamping

120V: (2)T10 incandescent tubular medium base 60W max
 220-240V: (2)E27 base (tubular 32mm suggested) 60W max

Note: Bulbs not included. Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request)
 110-120V~ 6W/ 420 lm/ 3000K

T38, E26
 3.7" L x 4.7" Ø

ETL

Wattage

120 watts max

Weight

10 lbs (4.5 kg)

Remarks

Specify drop length.
 Fixed drop not adjustable on site.
 Specify fixture length.
 Ceiling mount consistent with shade color.
 Additional weight support recommended for junction box installation.
 Indoor use and dry locations only.

Dimensions



Fixture length options:
 Large: 90" (229 cm)
 Small: 59" (150 cm)
 Ceiling mount diameter: 5" (13 cm)
 Minimum overall height: 8" (20 cm)
 Long shade: 3" Ø x 42" L
 (8 Ø x 107 cm L)
 Short shade: 3" Ø x 26.5" L
 (8 Ø x 67 cm L)



Hennen Cross

No. 432

TECHNICAL SPECIFICATIONS

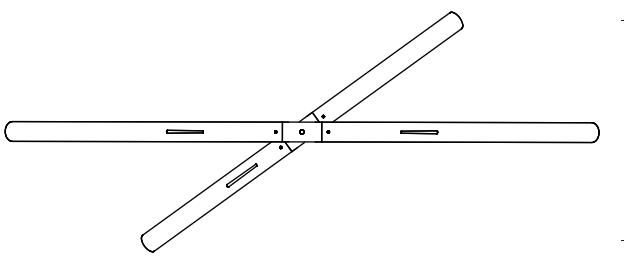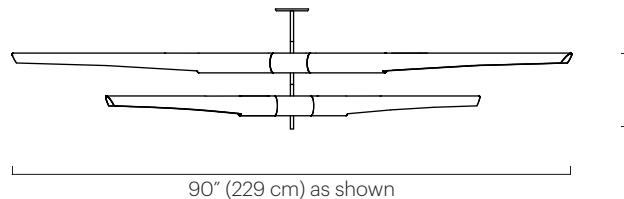

Shown above with 2 tiers

Description

The Hennen Cross is a fixture comprised of two or more tiers on a central axis. Tiers are configured with large or small shades that can be set to cast light up or down. Tiers scissor open and are adjustable on site.

Materials

Shades: Powder coated aluminum
Frame: Plated steel & aluminum
Ceiling mount: Powder coated steel
Drop: Plated steel

- White Gloss (white gloss interior)
- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom colors available.

Lamping (Two shades per tier)

120V: (2)T10 tubular incandescent medium base 60W max
220-240V: (2)E27 base (tubular 32mm suggested) 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request)
110-120V~ 6W/ 420 lm/ 3000K
T38, E26
3.7" L x 4.7" Ø
ETL

Wattage

120 watts max per tier

Weight

Weight varies; depending on number of tiers and dimensions.
2-tier fixture: approx 15 lbs (7 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Specify number of tiers.
Two tier minimum (four shades).
Each tier has two shades.
Specify tier lengths.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

Tier length options:
Large tier: 90" (229 cm)
Small tier: 59" (150 cm)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height:
Two tier: 14.5" (37 cm)
Three tier: 21.25" (54 cm)
Long shade: 3"Ø x 42" L

OTTO Collection


The Otto Collection is balanced and suspended in defiance of gravity. Defined by its economy of form, Otto features a cantilevered, brass arm that extends in a naturally occurring arc.



OTTO Sconce

TECHNICAL SPECIFICATIONS

No. 215

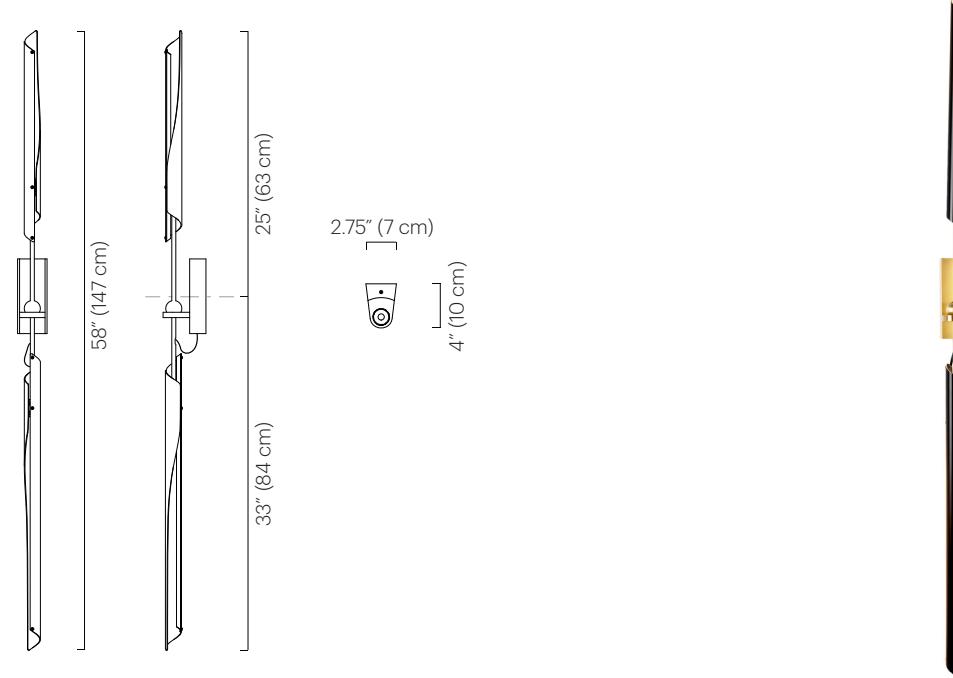

Description

The OTTO Sconce is comprised of two different sized OTTO shades mounted on opposite ends of the arm. Each shade contains a dimmable LED source and rotates 300° to cast light directionally. Available in three sizes.

Materials

Shade: Powder coated aluminum
Wall mount: Plated brass
Frame: Plated brass
Hardware: Plated and polished brass

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Brushed Brass
- Polished Nickel
- Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 1340 (equivalent to two 60W incandescent bulbs)
CRI: 80+
LED power source: 40W 24V
phase dimmable class 2
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

Voltage / Wattage

24 v / 22 watts

Weight

10 lbs (4.5 kg)

Remarks

ADA compliant depth.
Hardwired is standard.
Black exterior electrical cord is standard.
Custom arm length available
45" - 88" (114 - 224 cm)
Hardware finish consistent with frame finish.

Indoor use and dry locations only.
Wall mount designed to fit
2" x 4" vertical switch box only.

Dimensions


4" D x 2.75" W x 58" H
(10 D x 7 W x 147 cm H)
Bracket: 4" D x 2.75" W x 7" H
(10 D x 7 W x 18 cm H)
Top shade: 1.5" Ø x 20" L
(4 Ø x 51 cm L)
Bottom shade: 1.5" Ø x 28" L
(4 Ø x 71 cm L)



OTTO Loop Pendant

TECHNICAL SPECIFICATIONS

No. 438

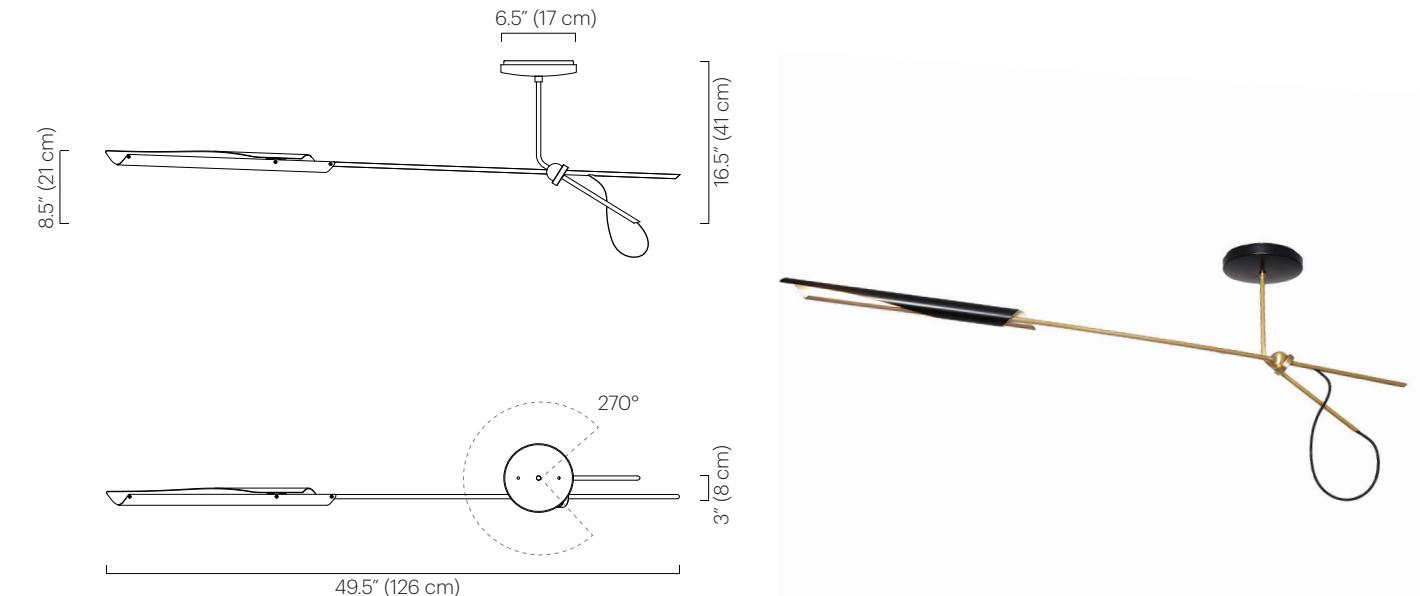

Description

The OTTO Loop Pendant is a lower profile version of our OTTO One Arm fixture featuring a single cantilevered arm. The OTTO shade contains a dimmable LED source and rotates 300° to cast light directionally. The fixture can rotate 270° from the canopy.

Materials

Shade: Powder coated aluminum
Ceiling mount: Powder coated aluminum and steel.
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Brushed Brass
- Polished Nickel
- Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 840 (equivalent to one 60W incandescent bulb)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

ELV Dimmer compatible

Voltage / Wattage

24V /12W

Weight

5 lbs (2.3 kg)

Remarks

Drop height is set at 16.5" (41 cm).
Fixed drop not adjustable on site.
Arm length fixed.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.
Hardware finish consistent with frame finish.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions


49.5" L x 16.5" H x 3" W
(126 L x 41 H x 8 cm W)
Canopy mount: 6.5" Ø x 1.25" H
(17 Ø x 3 cm H)
Shade: 1.5" Ø x 20" L
(4 Ø x 51 cm L)



OTTO Pendant

No. 443

TECHNICAL SPECIFICATIONS

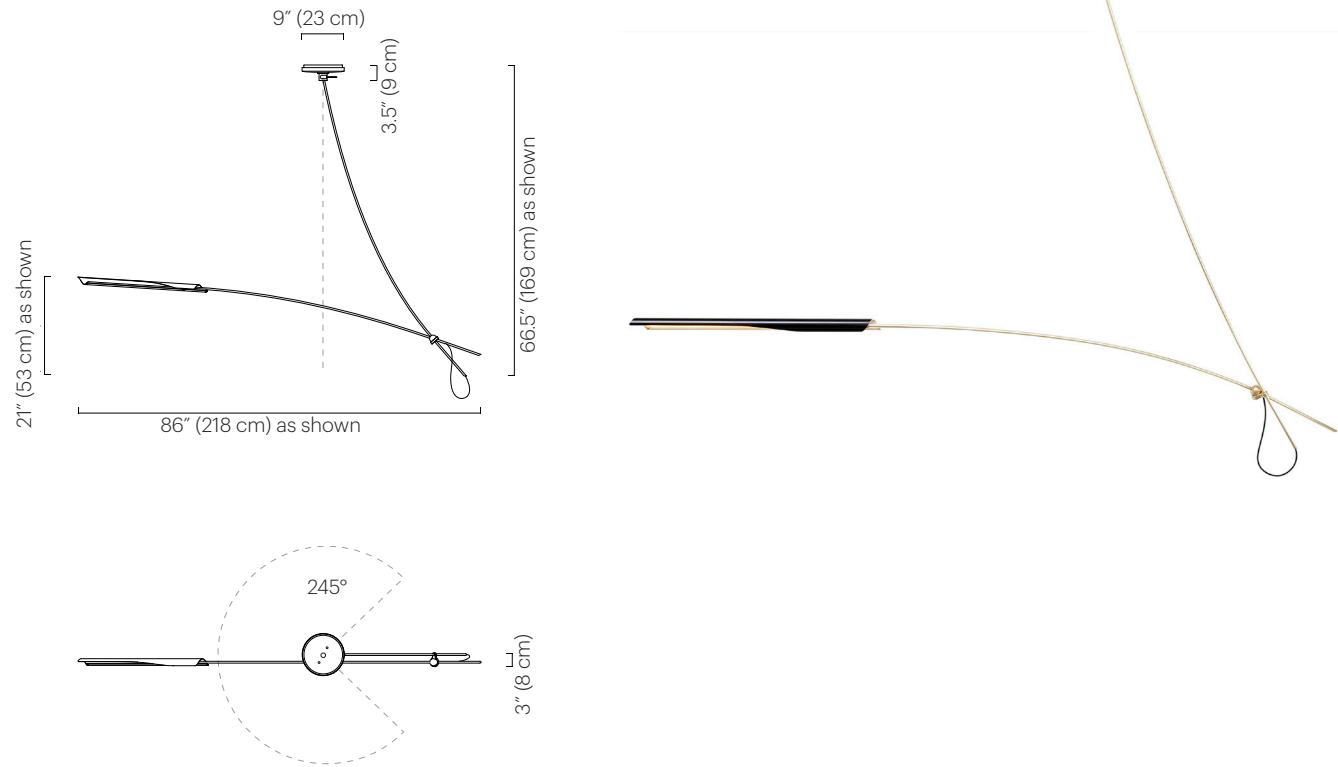

Description

The OTTO Pendant features a single cantilevered arm extending from a drop. The naturally occurring arcs of the fixture will vary depending on the length of the drop. The OTTO shade contains a dimmable LED source and rotates 300° to cast light directionally. The fixture can rotate 245° from the canopy.

Materials

Shade: Powder coated aluminum
Ceiling mount: Powder coated and plated aluminum
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Lamping

LED: Warm white 2700K
Lumens: 840 (equivalent to one 60W incandescent bulb)
CRI: 80+
50,000 LED life hours (approx.)

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Brushed Brass
- Polished Nickel
- Oil Rubbed Bronze

Custom finishes available.

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

Voltage / Wattage

24V / 11 watts

Weight

5 lbs (2.3 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Arm length is fixed.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.

Remarks continued

Hardware finish consistent with frame finish.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions


3" D x 86" W x 21" H
(8 D x 218 W x 53 cm H)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Shade: 1.5" Ø x 28" L
(4 Ø x 71 cm L)
Min overall height: 27.5" (70 cm)
Max overall height: 135.5" (344 cm)



OTTO Two Arm Pendant

No. 444

TECHNICAL SPECIFICATIONS

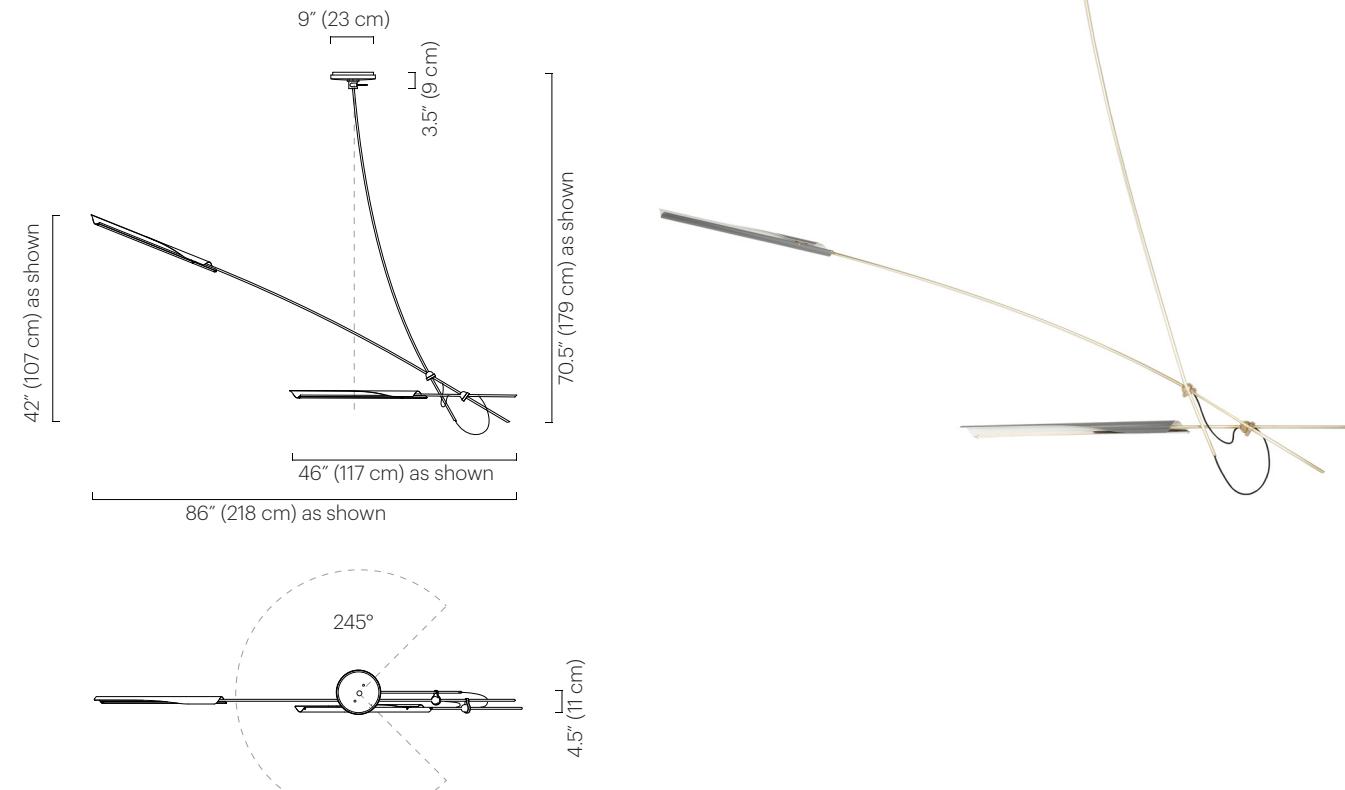

Description

The OTTO Two Arm features two arms extending from a drop. The naturally occurring arcs of the fixture will vary depending on the length of the drop. The OTTO shade contains a dimmable LED source and rotates 300° to cast light directionally. The fixture can rotate 245° from the canopy.

Materials

Shade: Powder coated aluminum
Ceiling mount: Powder coated and plated aluminum
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 1680 (equivalent to two 60W incandescent bulbs)
CRI: 80+
50,000 LED life hours (approx.)

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Brushed Brass
- Polished Nickel
- Oil Rubbed Bronze

Custom finishes available.

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

Voltage / Wattage

24V / 22 watts

Weight

5 lbs (2.3 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Arm length is fixed.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.

Remarks continued

Hardware finish consistent with frame finish.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions


4.5" D x 86" W x 42" H
(11 D x 218 W x 107 cm H)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Shades: 1.5" Ø x 28" L
(4 Ø x 71 cm L)
Min overall height: 34.5"
(88 cm)
Max overall height: 132.5"
(336.5 cm)



OTTO Pendant Duo

TECHNICAL SPECIFICATIONS

No. 445

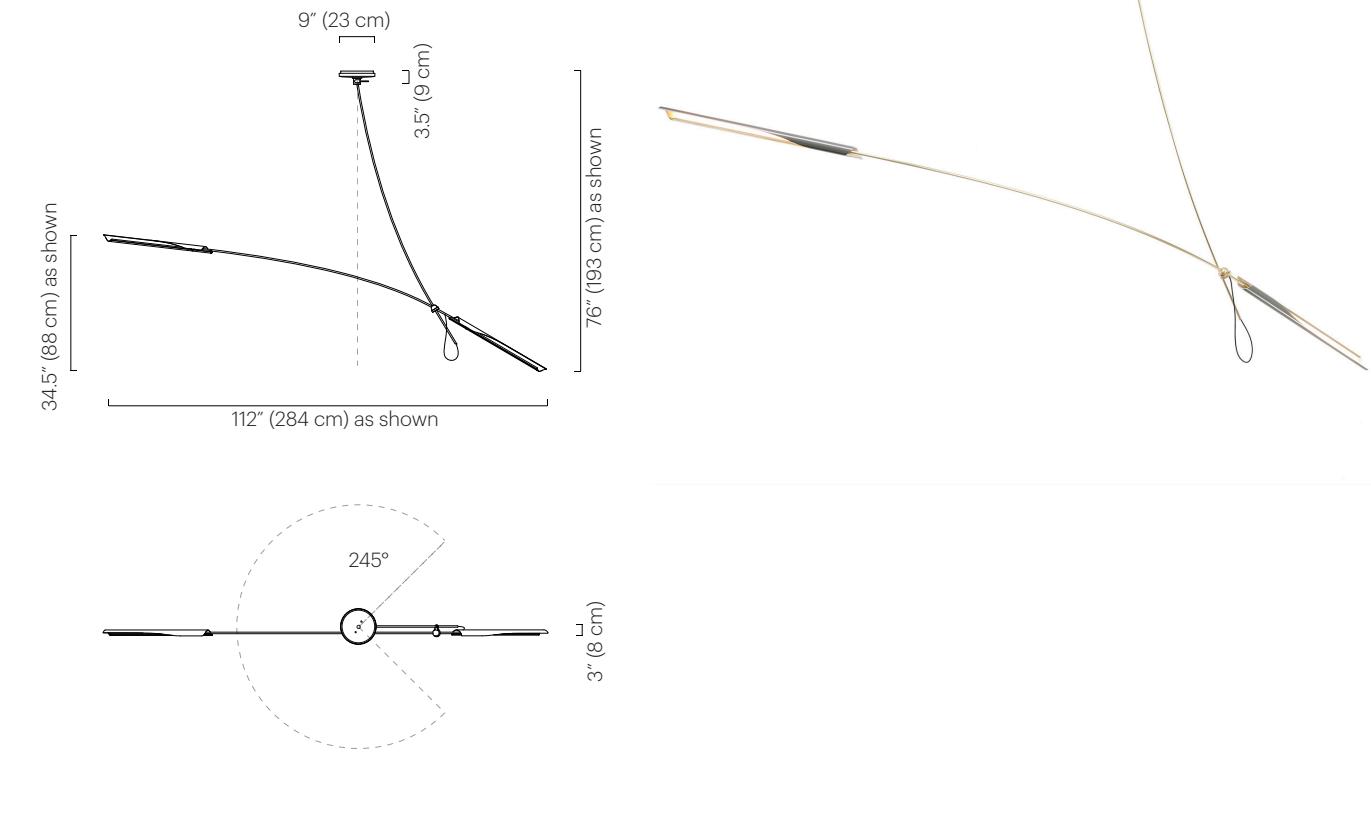

Description

The OTTO Pendant Duo features one arm with a shade on either end extending from a customizable drop. The naturally occurring arcs of the fixture will vary depending on the length of the drop. The OTTO shades contain a dimmable LED source and rotate 300° to cast light directionally. The fixture can rotate 245° from the canopy.

Materials

Shade: Powder coated aluminum
Ceiling mount: Powder coated and plated aluminum
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Brushed Brass
- Polished Nickel
- Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 1680 (equivalent to two 60W incandescent bulbs)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

Voltage / Wattage

24V / 22 watts

Weight

5 lbs (2.3 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Arm length is fixed.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.

Remarks continued

Hardware finish consistent with frame finish.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions


3" D x 112" W x 34.5" H
(8 D x 284 W x 88 cm H)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Shades: 1.5" Ø x 28" L
(4 Ø x 71 cm L)
Min overall height: 37.5" (95 cm)
Max overall height: 134.5" (342 cm)



OTTO L Pendant

No. 446

TECHNICAL SPECIFICATIONS

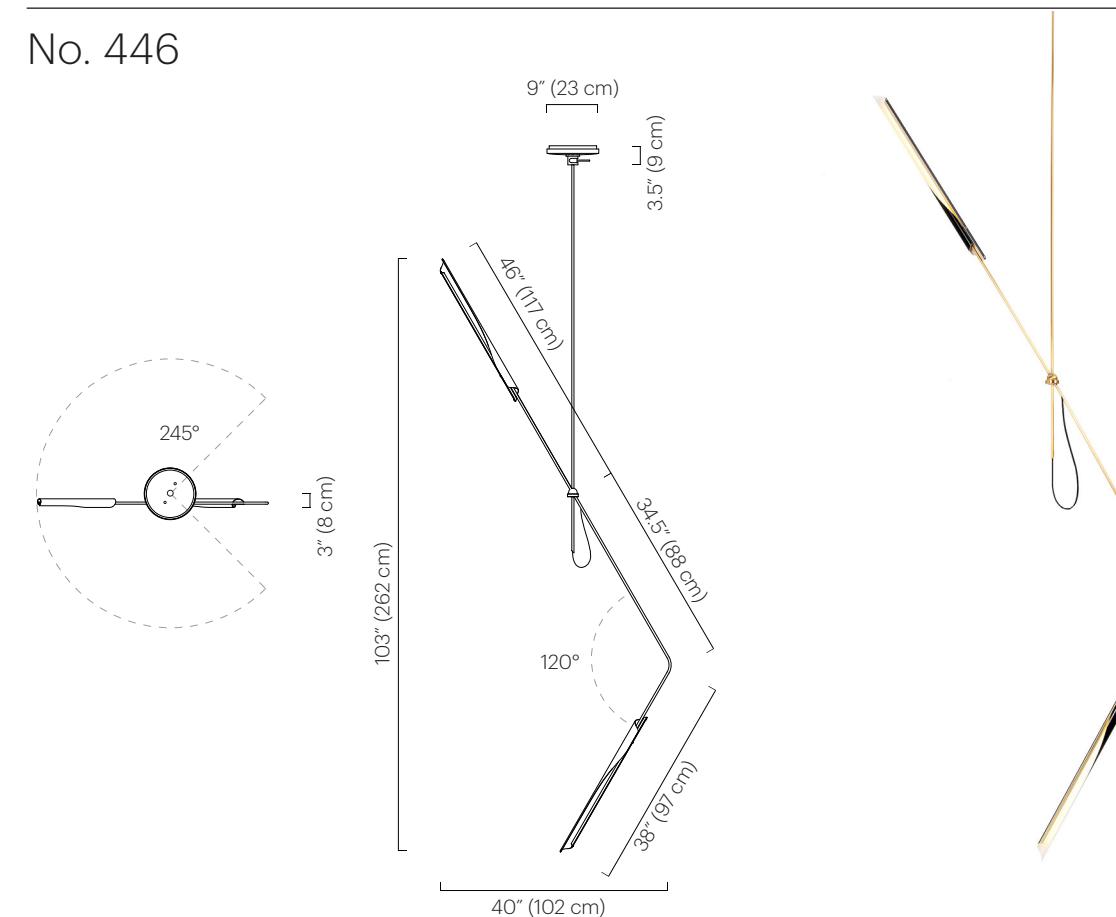

Description

The OTTO L features one bent arm with an OTTO shade on each end. The OTTO shade contains a dimmable LED source and rotates 300° to cast light directionally. The fixture can rotate 245° from the canopy. Fixture is balanced by design; angle is not adjustable.

Materials

Shade: Powder coated aluminum
Ceiling mount: Powder coated and plated aluminum
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 1680 (equivalent to two 60W incandescent bulbs)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

Voltage / Wattage

24V / 22 watts

Weight

5 lbs (2.3 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Arm length is fixed.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.
Hardware finish consistent with frame finish.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.
Specify number of tiers

Dimensions

3" D x 40" W x 103" H
(8 D x 102 W x 262 cm H)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Shades: 1.5" Ø x 28" L
(4 Ø x 71 cm L)
Min overall height: 109" (277 cm)





446 OTTO L + LS Pendant
Black Satin + Brushed Brass

OTTO LS Pendant

No. 446

TECHNICAL SPECIFICATIONS

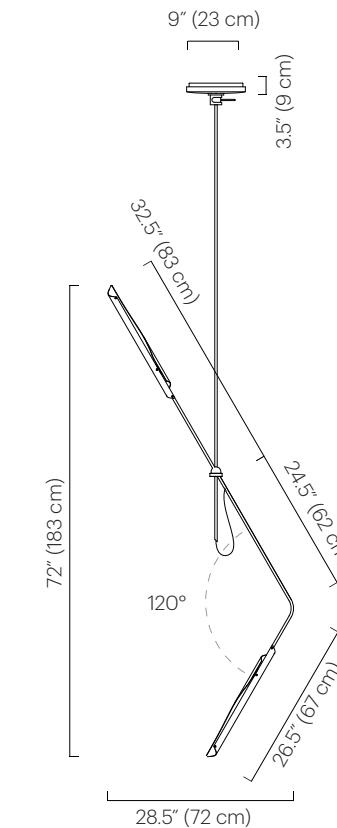

Description

The OTTO LS features one bent arm with an OTTO shade on each end. The OTTO shades contain a dimmable LED source and rotate 300° to cast light directionally. The fixture can rotate 245° from the canopy. Fixture is balanced by design; angle is not adjustable.

Materials

Shade: Powder coated aluminum
Ceiling mount: Powder coated and plated aluminum
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Brushed Brass
- Polished Nickel
- Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 1000 (equivalent to two 40W incandescent bulbs)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/ TRIAC (leading edge) switch

Voltage / Wattage

24V / 22 watts

Weight

5 lbs (2.3 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Arm length is fixed.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.
Hardware finish consistent with frame finish.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.
Specify number of tiers

Dimensions


3" D x 28.5" W x 72" H
(8 D x 72 W x 183 cm H)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Shades: 1.5" Ø x 20" L
(4 Ø x 51 cm L)
Min overall height: 78"
(198 cm)



OTTO V Pendant

No. 447

TECHNICAL SPECIFICATIONS

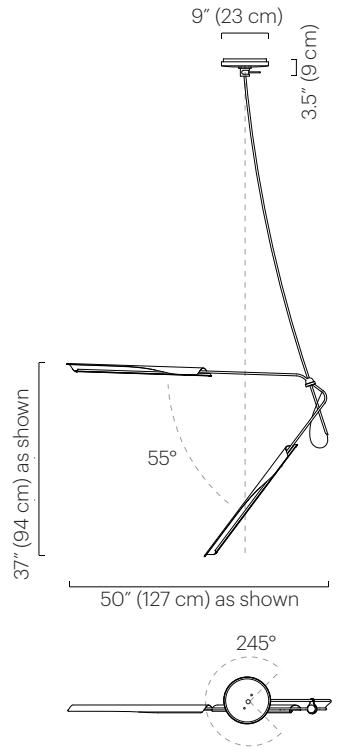

Description

The OTTO V features one bent arm with an OTTO shade on each end. The naturally occurring arc of the drop will vary depending on the length. Fixture is balanced by design; arm angles are not adjustable. The OTTO shades contain a dimmable LED source and rotate 300° to cast light directionally. The fixture can rotate 245° from the canopy.

Materials

Shade: Powder coated aluminum
Ceiling mount: Powder coated and plated aluminum
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Brushed Brass
- Polished Nickel
- Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 1680 (equivalent to two 60W incandescent bulbs)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

Voltage / Wattage

24V / 22 watts

Weight

5 lbs (2.3 kg)

Remarks


Specify drop length.
Fixed drop not adjustable on site.
Arm length is fixed.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.

Remarks continued
Hardware finish consistent with frame finish.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions
3" D x 50" W x 37" H
(8 D x 127 W x 94 cm H)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Shade: 1.5" Ø x 28" L
(4 Ø x 71 cm L)
Min overall height: 42.5" (108 cm)
Max overall height: 131.5" (334 cm)

OTTO X Pendant

No. 448

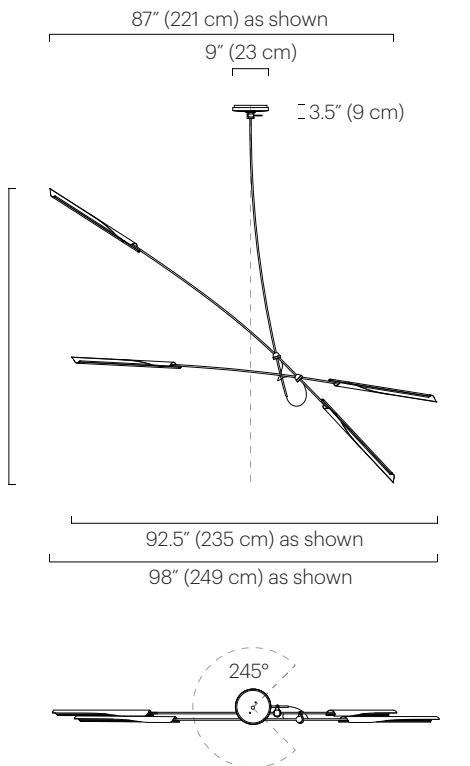

444 OTTO Two Arm Pendant + 448 OTTO X
Black Satin + Polished Nickel

Description

The OTTO X features two intersecting arms with an OTTO shade on each end extending from a drop. The naturally occurring arcs of the fixture will vary depending on the length of the drop. All four OTTO shades contain a dimmable LED source. Each shade rotates 300° to cast light directionally. The fixture can rotate 245° from the canopy.

Materials

Shades: Powder coated aluminum
Ceiling mount: Powder coated and plated aluminum
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 3360 (equivalent to four 60W incandescent bulbs)
CRI: 80+
50,000 LED life hours (approx.)

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Brushed Brass
- Polished Nickel
- Oil Rubbed Bronze

Custom finishes available.

Power Supply

60W 24V

For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

Voltage / Wattage

24V / 44 watts

Weight

10 lbs (4.5 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Arm length is fixed.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.

Remarks continued

Hardware finish consistent with frame finish.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

4.5" D x 98" W x 74.5" H
(11 D x 249 W x 189 cm H)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Shade: 1.5" Ø x 28" L
(4 Ø x 71 cm L)
Min overall height: 74" (188 cm)
Max overall height: 159" (404 cm)




Treble Collection

The Treble Collection is a study in tensile elegance that harmonizes complexity with restraint. Curved brass arms are drawn, improvisational gestures. Each metal shade maintains order with a gently percussive rhythm.

Treble Sconce

TECHNICAL SPECIFICATIONS

No. 218

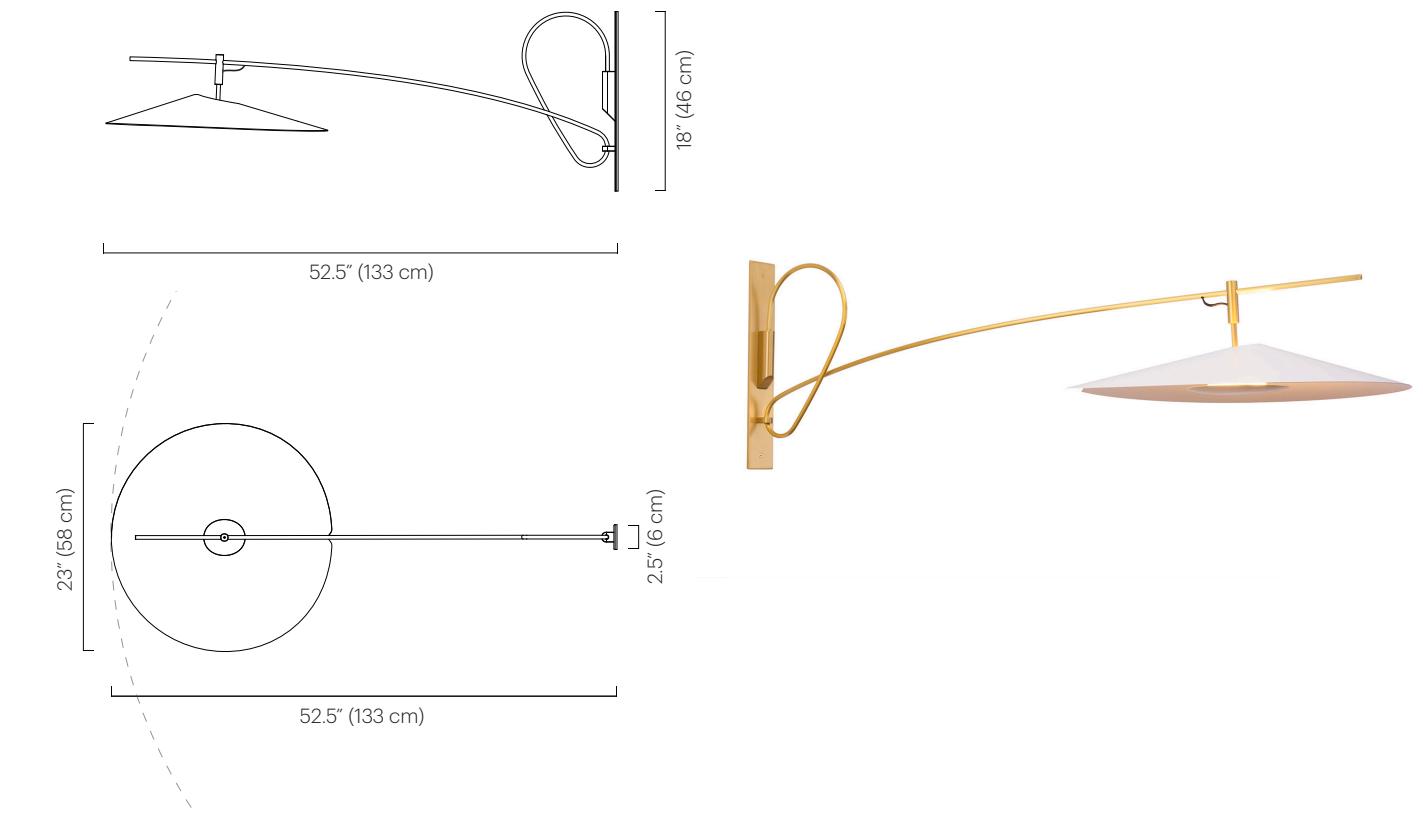

Description

The Treble Sconce features a single arm anchored by a solid brass wall mount. The sconce has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with an acrylic diffuser. The arm swings side to side from the wall mount.

Materials

Shade: Powder coated aluminum
Frame: Plated brass
Wallmount: Plated brass
Lamp enclosure: Acrylic, aluminum, steel and plated brass.

Anodized:

- Polished Black (matte gold interior)
- Polished Black (red ombre interior)

Finish

- Brushed Brass
- Polished Nickel
- Oil Rubbed Bronze

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Lamping

LED: Warm white 2700K
Lumens: 1200 (equivalent to one 75W incandescent bulb)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

ELV Dimmer compatible

Voltage / Wattage

24V / 11.5 W

Weight

15 lbs (6.8 kg)

Remarks

Each fixture is handmade and uniquely balanced, therefore shade location may vary up to 2" on arm. Shade does not rotate. Black exterior electrical cord is standard.

Custom arm length available 36" - 72" (91 -182 cm)
Additional weight support recommended.
Hardware finish consistent with frame finish.
Indoor use and dry locations only.
Wall mount designed to fit 2" x 4" vertical switch box only.

Dimensions


52.5" L x 23" W x 18" H
(133 L x 58 W x 46 cm H)
Wallmount: 2.5" W x 18" H
(6 W x 46 cm H)
Shade: 23" Ø x 4" H
(58 Ø x 10 cm H)



Treble Standing Lamp

No. 318

TECHNICAL SPECIFICATIONS

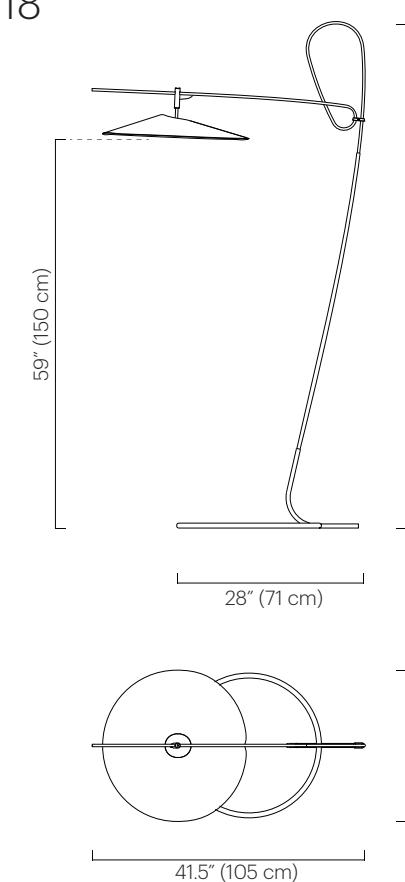

Description

The Treble Standing Lamp features a plated frame and a single Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with an acrylic diffuser.

Materials

Shade: Anodized or powder coated aluminum
Frame: Plated steel and brass
Lamp enclosure: Acrylic, aluminum, steel and plated brass.

Shade Color

Powder coated:
 Black Satin (ivory satin interior)
 Grey Gloss (ivory satin interior)
 Ivory Satin (ivory satin interior)
 White Satin (white satin interior)

Custom colors available.

Anodized:

Polished Black (matte gold interior)
 Polished Black (red ombre interior)

Finish

Brushed Brass
 Polished Nickel
 Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 825 (equivalent to one 60W incandescent bulb)
CRI: 80+
54,000 LED life hours (approx.)

Voltage / Wattage
120V (Direct Voltage) / 10W


Weight
20 lbs (9 kg)

Remarks

Fixture is not UL listed.
Arm length is fixed.
Shade does not rotate.
Hardware finish consistent with frame finish.
Dimmer switch located on cord.
Cord color is black;
length approx. 10 feet.
Indoor use and dry locations only.

Dimensions


41.5" D x 23" W x 77" H
(105 D x 58 W x 196 cm H)
Shade: 23" Ø x 4" H
(58 Ø x 10 cm H)

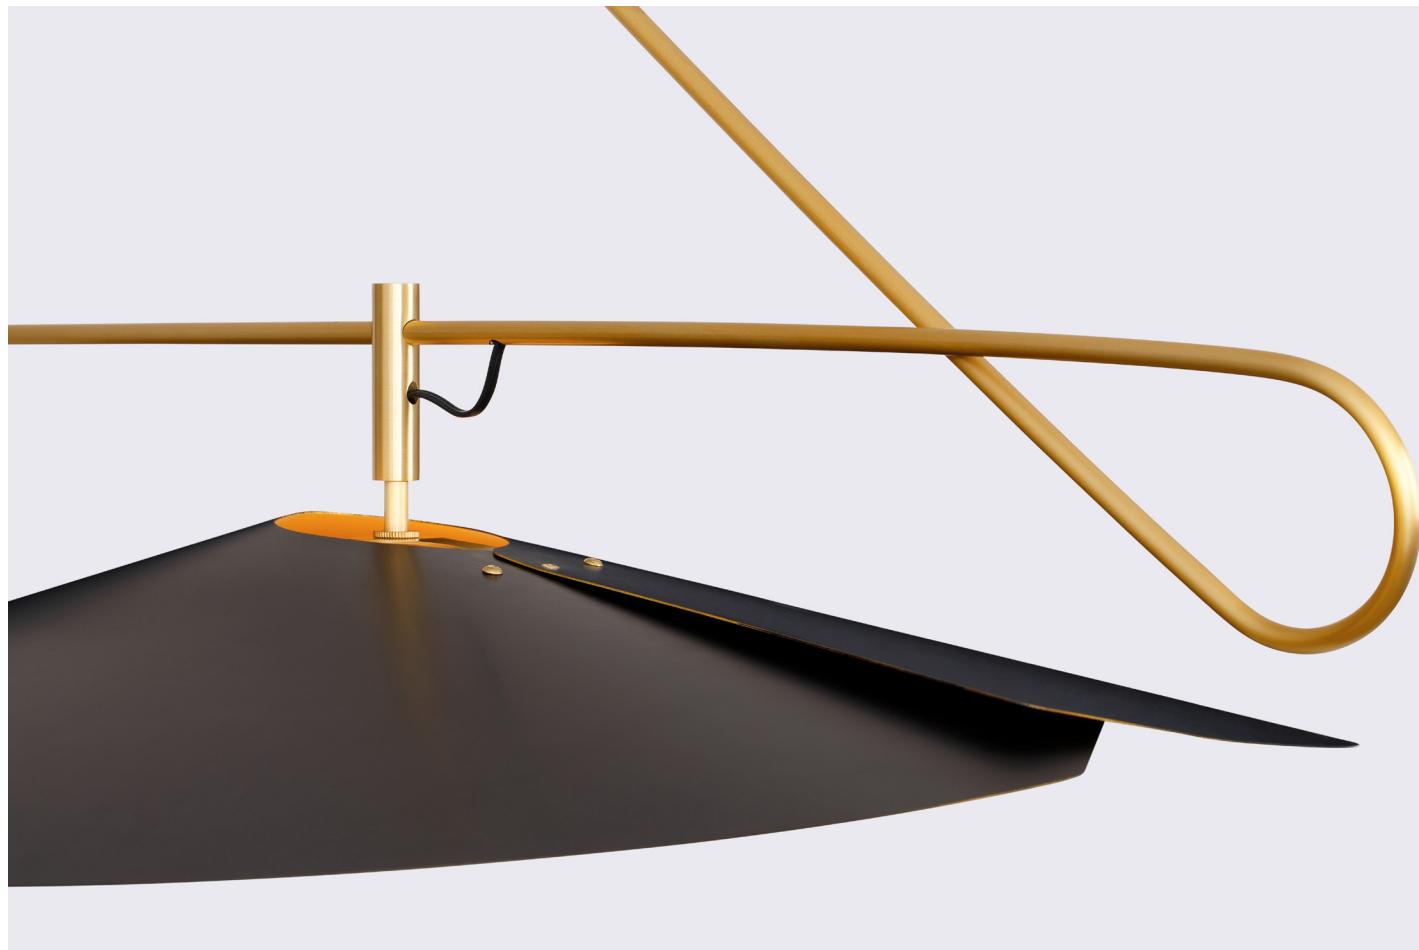

Treble Loop Pendant

No. 451

TECHNICAL SPECIFICATIONS

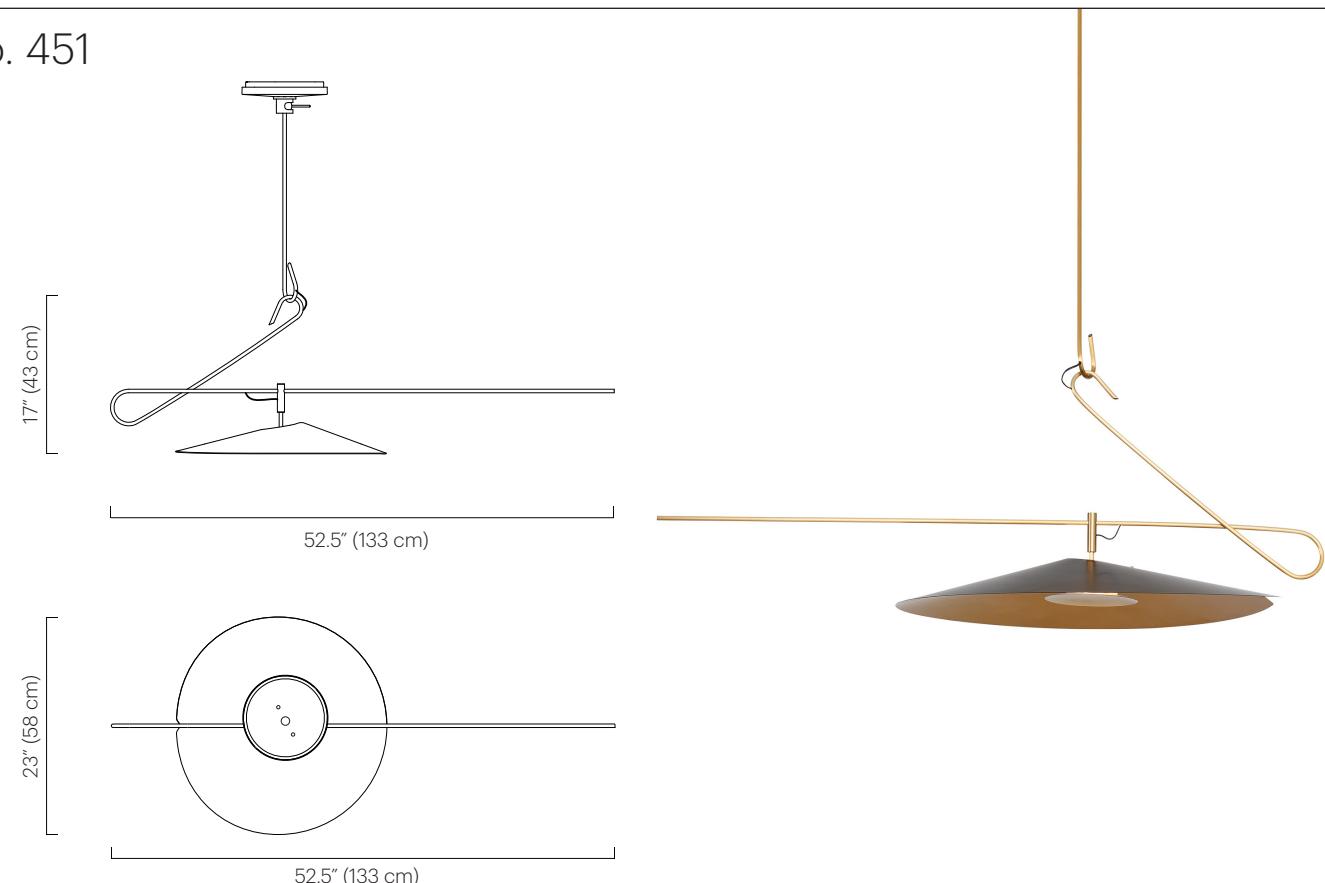

Description

The Treble Loop is a balanced fixture on an asymmetrical axis, which allows gentle movement. The fixture has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with an acrylic diffuser. The fixture can rotate 245° from the canopy.

Materials

Shade: Powder coated aluminum
Ceiling mount: Powder coated aluminum and steel.
Frame: Plated brass
Drop: Plated brass
Lamp enclosure: Acrylic, aluminum, steel and plated brass.

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Anodized:

- Polished Black (matte gold interior)
- Polished Black (red ombre interior)

Finish

- Brushed Brass
- Polished Nickel
- Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 1200 (equivalent to one 75W incandescent bulb)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

ELV Dimmer compatible

Voltage / Wattage

24V /12W

Weight

10 lbs (4.5 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Arm and frame lengths are fixed.
Shade does not rotate.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.
Hardware finish consistent with frame finish.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

52.5" L x 23" W x 17" H
(133 L x 58 W x 43 cm H)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Shade: 23" Ø x 4" H
(58 Ø x 10 cm H)
Min. overall height: 25" (63 cm)





452 Treble Tiered Mobile 2 Tier

Polished Black (Gold Interior) + Brushed Brass

Treble Tiered Mobile, 2 Tier

No. 452

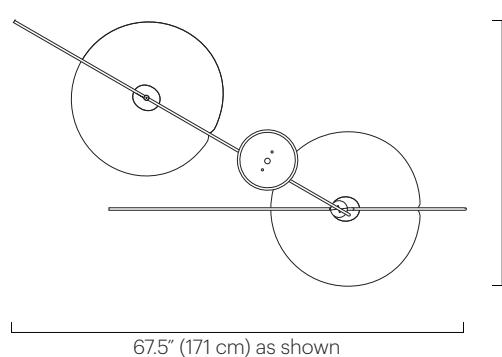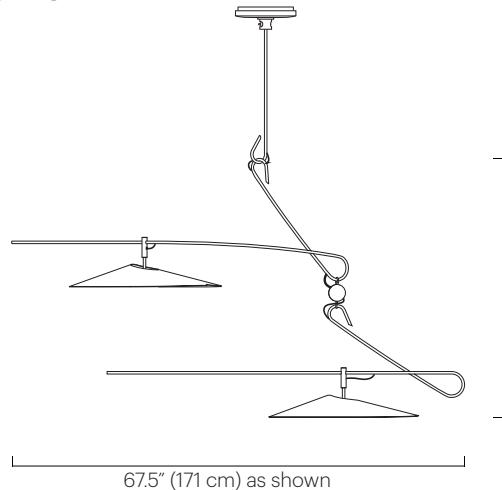

TECHNICAL SPECIFICATIONS

Description

The Treble Tiered Mobile features two tiers of different lengths that balance on asymmetrical axes, which allows gentle movement. Each tier has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with an acrylic diffuser. The fixture can rotate 245° from the canopy. Tier rotation is adjustable and can be set on site.

Materials

Shade: Powder coated aluminum
 Ceiling mount: Powder coated aluminum and steel.
 Frame: Plated brass
 Drop: Plated brass
 Lamp enclosure: Acrylic, aluminum, steel and plated brass.

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Anodized:

- Polished Black (matte gold interior)
- Polished Black (red ombre interior)

Finish

- Brushed Brass
- Polished Nickel
- Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K
 Lumens: 2400 (equivalent to two 75W incandescent bulbs)
 CRI: 80+
 50,000 LED life hours (approx.)

Power Supply

60W 24V
 For 120V areas: dimmable Class 2 included in canopy.
 For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

ELV Dimmer compatible

Voltage / Wattage

24V / 23W

Weight

15 lbs (6.8 kg)

Remarks

Each fixture is handmade and therefore may vary up to 3" in overall height due to the counterbalancing nature. Specify drop length. Arm and frame lengths are fixed. Shade does not rotate. Fixed drop not adjustable on site.


Dimensions

Tier 1: 52.5" (133 cm)
 Tier 2: 57" (145 cm)
 Max. dimensions: 90" L x 23" W (229 L x 58 cm W)
 Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H)
 Shade: 23" Ø x 4" H (58 Ø x 10 cm H)
 Min. overall height: 47.5" (121 cm)



Treble Tiered Mobile, 3 Tier

No. 452

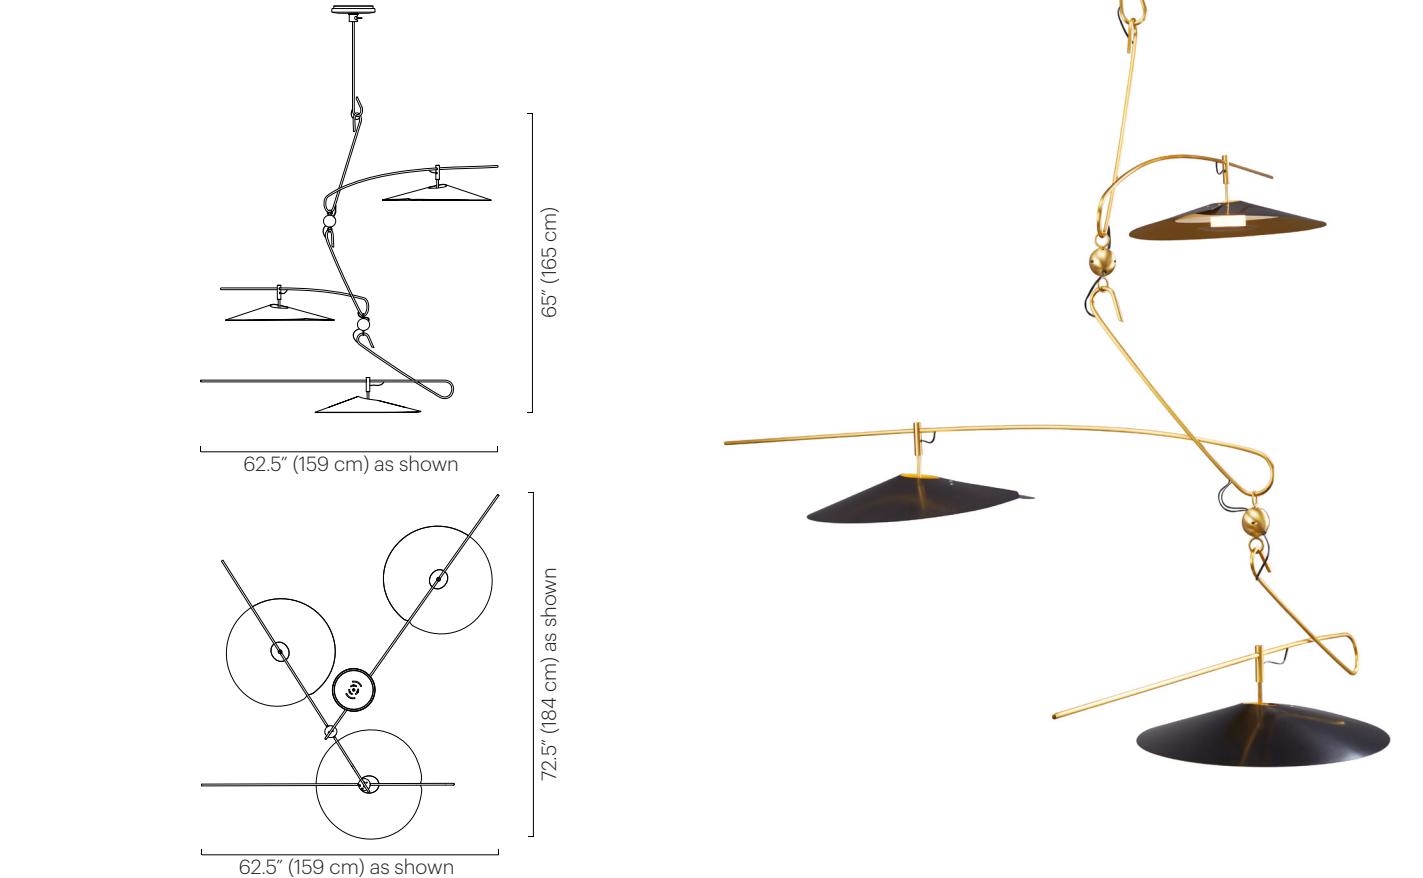

Description

The Treble Tiered Mobile features three tiers of different lengths that balance on asymmetrical axes, which allows gentle movement. Each tier has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with an acrylic diffuser. The fixture can rotate 245° from the canopy. Tier rotation is adjustable and can be set on site.

Materials

Shade: Powder coated aluminum
Ceiling mount: Powder coated aluminum and steel.
Frame: Plated brass
Drop: Plated brass
Lamp enclosure: Acrylic, aluminum, steel and plated brass.

Finish

Brushed Brass
Polished Nickel
Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Watt
Lumens: 75W incandescent bulbs
CRI: 80+
50,000 LED life hours (approx.)

Shade Color

Black Satin (ivory satin interior)
Grey Gloss (ivory satin interior)
Ivory Satin (ivory satin interior)
White Satin (white satin interior)

Custom colors available.

Anodized:

Polished Black (matte gold interior)
Polished Black (red ombre interior)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

ELV Dimmer compatible

Voltage / Wattage

24V / 35W

Weight

25 lbs (11.3) kg

Remarks

Each fixture is handmade and therefore may vary up to 3" in overall height due to the counterbalancing nature. Specify drop length. Arm and frame lengths are fixed. Shade does not rotate. Fixed drop not adjustable on site.

Remarks continued
Not for use on sloped ceilings. Black exterior electrical cord is standard. Hardware finish consistent with frame finish. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.


Dimensions

Tier 1: 52.5" (133 cm)
Tier 2: 57" (145 cm)
Tier 3: 63" (160 cm)
Max. dimensions: 108.5" L x 23" W (267 L x 58 cm W)
Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H)
Shade: 23" Ø x 4" H (58 Ø x 10 cm H)
Min. overall height: 73" (185 cm)



Treble Tiered Mobile, 4 Tier

No. 452

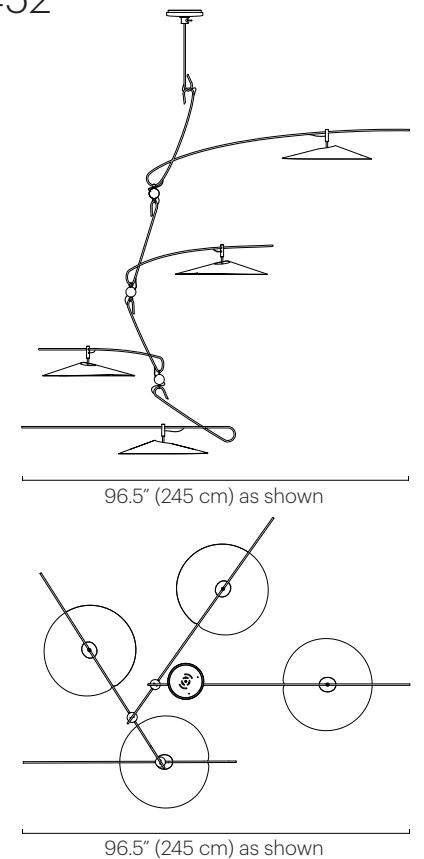

Description

The Treble Tiered Mobile features four tiers of different lengths that balance on asymmetrical axes, which allows gentle movement. Each tier has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with an acrylic diffuser. The fixture can rotate 245° from the canopy. Tier rotation is adjustable and can be set on site.

Materials

Shade: Powder coated aluminum
 Ceiling mount: Powder coated aluminum and steel.
 Frame: Plated brass
 Drop: Plated brass
 Lamp enclosure: Acrylic, aluminum, steel and plated brass.

Lamping

LED: Warm white 2700K
 Lumens: 4800 (equivalent to four 75W incandescent bulbs)
 CRI: 80+
 50,000 LED life hours (approx.)

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Anodized:

- Polished Black (matte gold interior)
- Polished Black (red ombre interior)

Finish

- Brushed Brass
- Polished Nickel
- Oil Rubbed Bronze

Custom finishes available.

Power Supply

60W 24V
 For 120V areas: dimmable Class 2 included in canopy.
 For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

ELV Dimmer compatible

Voltage / Wattage

24V / 46 W

Weight

30 lbs (13.6 kg)

Remarks

Each fixture is handmade and therefore may vary up to 3" in overall height due to the counterbalancing nature. Specify drop length. Arm and frame lengths are fixed. Shade does not rotate. Fixed drop not adjustable on site.

TECHNICAL SPECIFICATIONS

Remarks continued
 Not for use on sloped ceilings.
 Black exterior electrical cord is standard.

Hardware finish consistent with frame finish.

Ceiling mount consistent with shade color.

Additional weight support recommended for junction box installation.

Indoor use and dry locations only.



Dimensions

Tier 1: 52.5" (133 cm)
 Tier 2: 57" (145 cm)
 Tier 3: 63" (160 cm)
 Tier 4: 65" (165 cm)
 Max. dimension: 122" L x 23" W (310 L x 58 cm W)
 Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H)
 Shade: 23" Ø x 4" H (58 Ø x 10 cm H)
 Min. overall height: 102.5" (260 cm)

Treble Pendant

TECHNICAL SPECIFICATIONS

No. 453

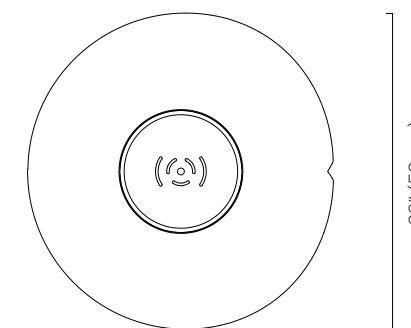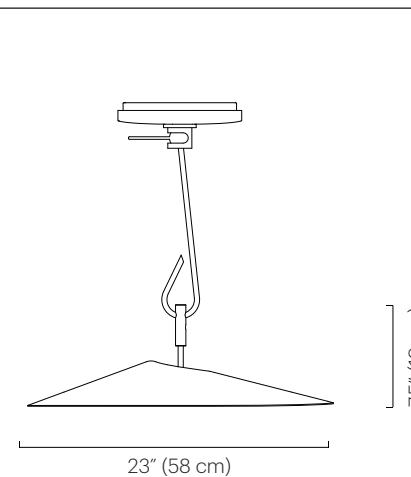

Description
The Treble Pendant has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with an acrylic diffuser. The fixture can rotate 245° from the canopy.

Materials
Shade: Powder coated aluminum
Ceiling mount: Powder coated aluminum and steel.
Frame: Plated brass
Drop: Plated brass
Lamp enclosure: Acrylic, aluminum, steel and plated brass.

Custom finishes available.

Shade Color
● Black Satin (ivory satin interior)
● Grey Gloss (ivory satin interior)
● Ivory Satin (ivory satin interior)
● White Satin (white satin interior)

Custom colors available.

Anodized:
● Polished Black (matte gold interior)
● Polished Black (red ombre interior)

Finish
● Brushed Brass
● Polished Nickel
● Oil Rubbed Bronze

Custom finishes available.

Lamping
LED: Warm white 2700K
Lumens: 1200 (equivalent to one 75W incandescent bulb)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply
60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility
ELV Dimmer compatible

Voltage / Wattage
24V /12W

Weight
10 lbs (4.5 kg)

Remarks
Specify drop length.
Fixed drop not adjustable on site.
Shade does not rotate.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.


Hardware finish consistent with frame finish.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions
23" L x 23" W x 7.5" H
(58 L x 58 W x 19 cm H)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Shade: 23" Ø x 4" H
(58 Ø x 10 cm H)
Min. overall height: 16" (41 cm)



Sarus Collection



The Sarus Collection is a sculptural mobile of lean, cylindrical shapes; an arrangement of precision forms, suspended in balance and dictated by gravity.

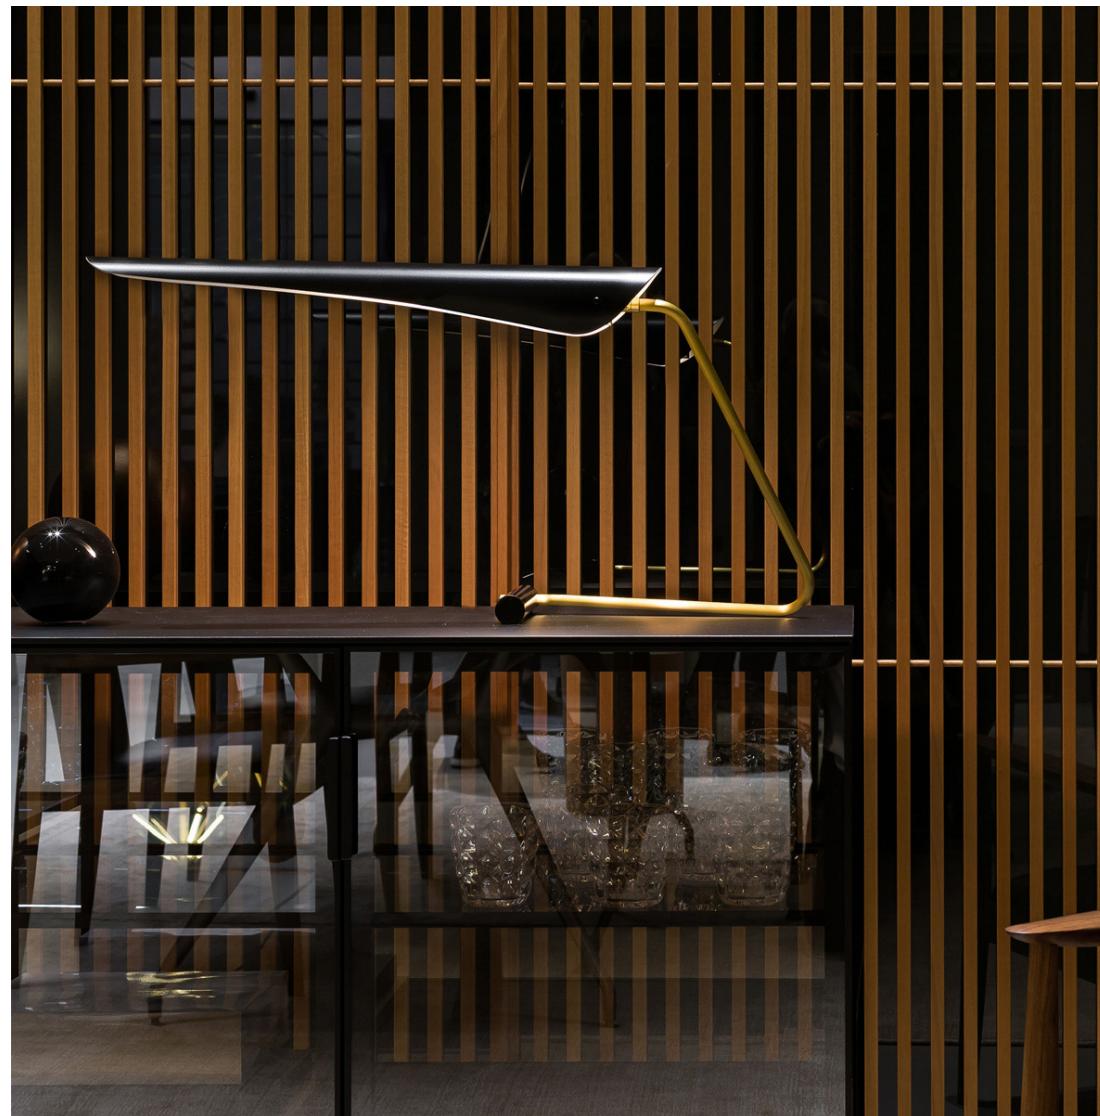

Sarus Table Lamp

TECHNICAL SPECIFICATIONS

No. 113

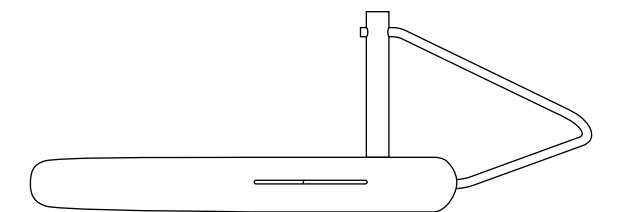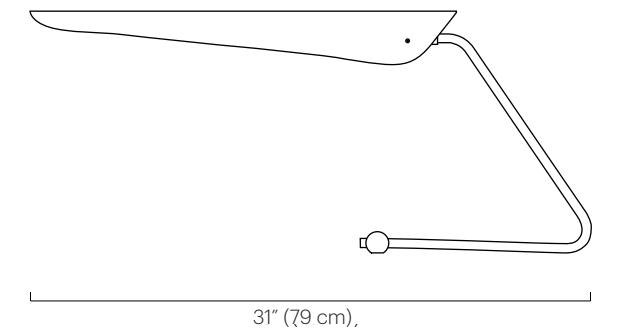

Description

The Sarus shade is mounted to a hand bent steel frame. The powder coated aluminum shade rotates 320° to cast light directionally.

Materials

Shade: Powder coated aluminum
Frame: Plated steel
Base: Powder coated steel

Custom colors available.

Custom finishes available.

Base & Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: T10 tubular incandescent medium base 40W max
220-240V: E27 base (tubular 32mm recommended) 40W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request)
110-120V~/ 6W/ 420 lm/ 3000K
T38, E26
3.7" L x 4.7" Ø
ETL

Wattage

40 watts max
5 lbs (2.3 kg)

Remarks

UL listed.
On/Off switch located on cord.
Shade and base are same color.
Cord color is black;
length approx. 7 feet.
Indoor use and dry locations only.



Dimensions

31" D x 11" W x 13.5" H
(79 D x 28 W x 34 cm H)
Shade: 3" Ø x 23" L
(8 Ø x 58 cm L)

Sarus Sconce - Single

TECHNICAL SPECIFICATIONS

No. 221

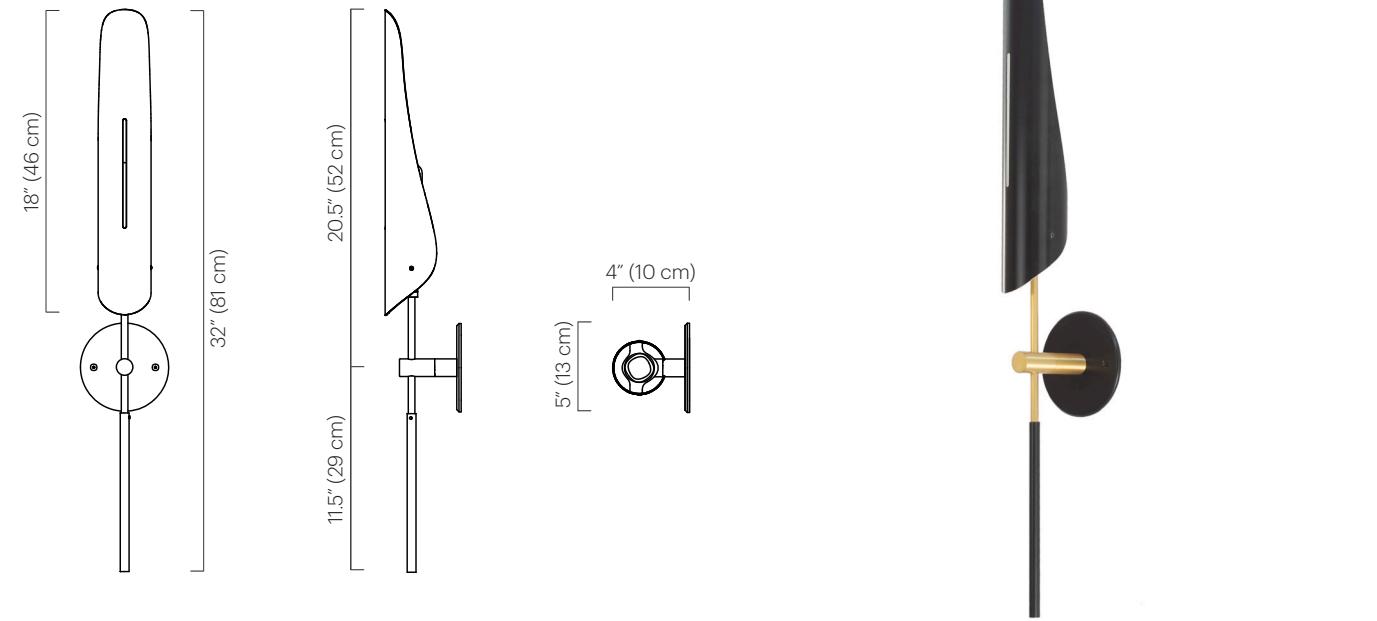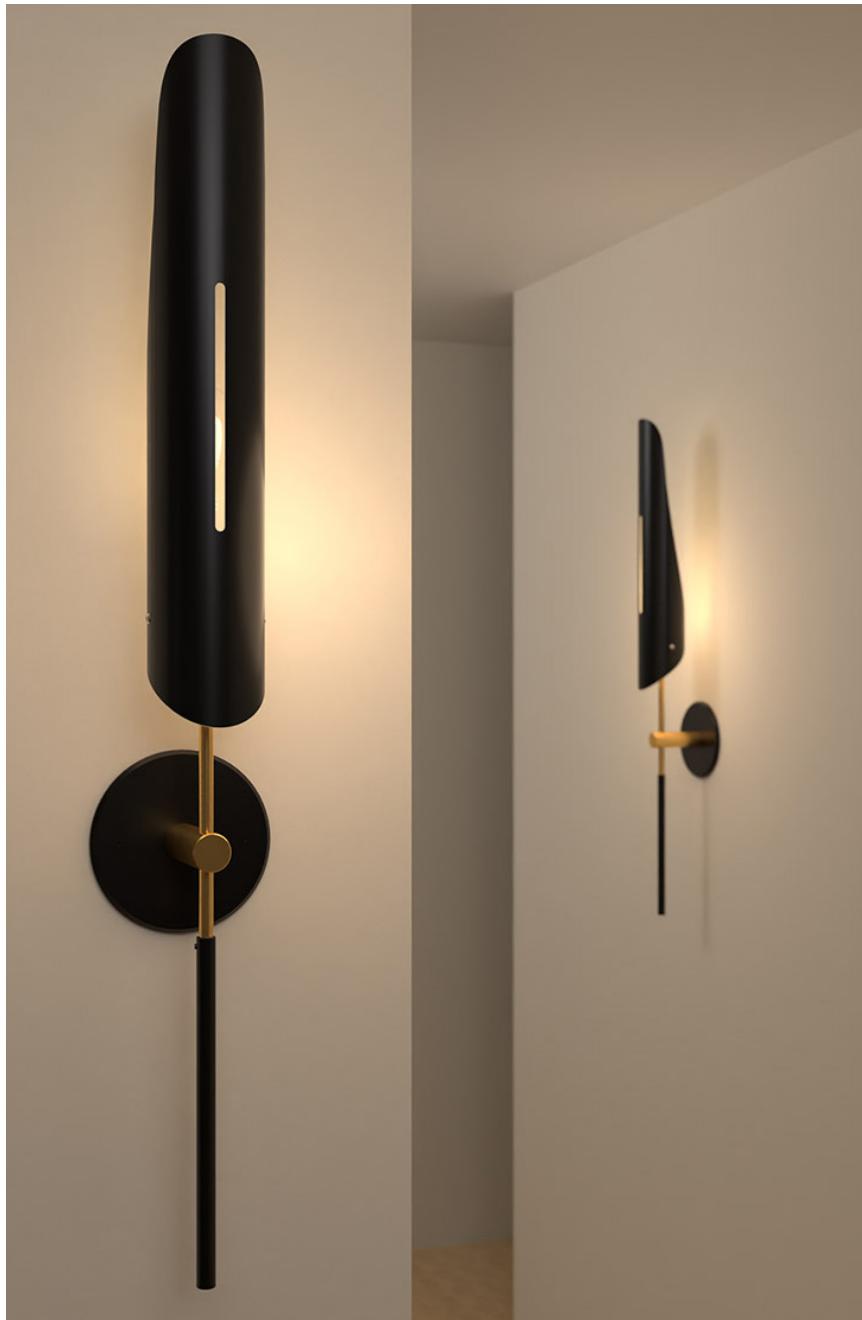

Description

The Sarus Sconce features two arms on opposing sides affixed to a powder coated steel wall mount. A single shade is balanced upright with a counterweight. The shade swivels 320° to cast light directionally.

Materials

Shade: Powder coated aluminum
Wall mount: Powder coated steel
Hardware: Plated brass
Arm: Plated steel
Counterweight: Powder coated steel

Mount & Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: T10 tubular incandescent medium base
60W max
220-240V: E27 base (tubular 32mm suggested) 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request)
110-120V/- 6W/ 420 lm/ 3000K
T38, E26
3.7" L x 4.7" Ø
ETL

Wattage

60 watts max

Weight


5lb (2.3 kg)

Remarks

UL Listed.
Hardwired is standard.
Indoor use and dry locations only.
Wall mount consistent with shade color.
Counterweights are black.
ADA compliant.

Dimensions


Single: 4" D x 5" W x 32" H
(10 D x 13 W x 81 cm H)
Wall mount diameter: 5" (13 cm)
Shade: 18" L x 3" Ø
(46 L x 8 Ø cm)

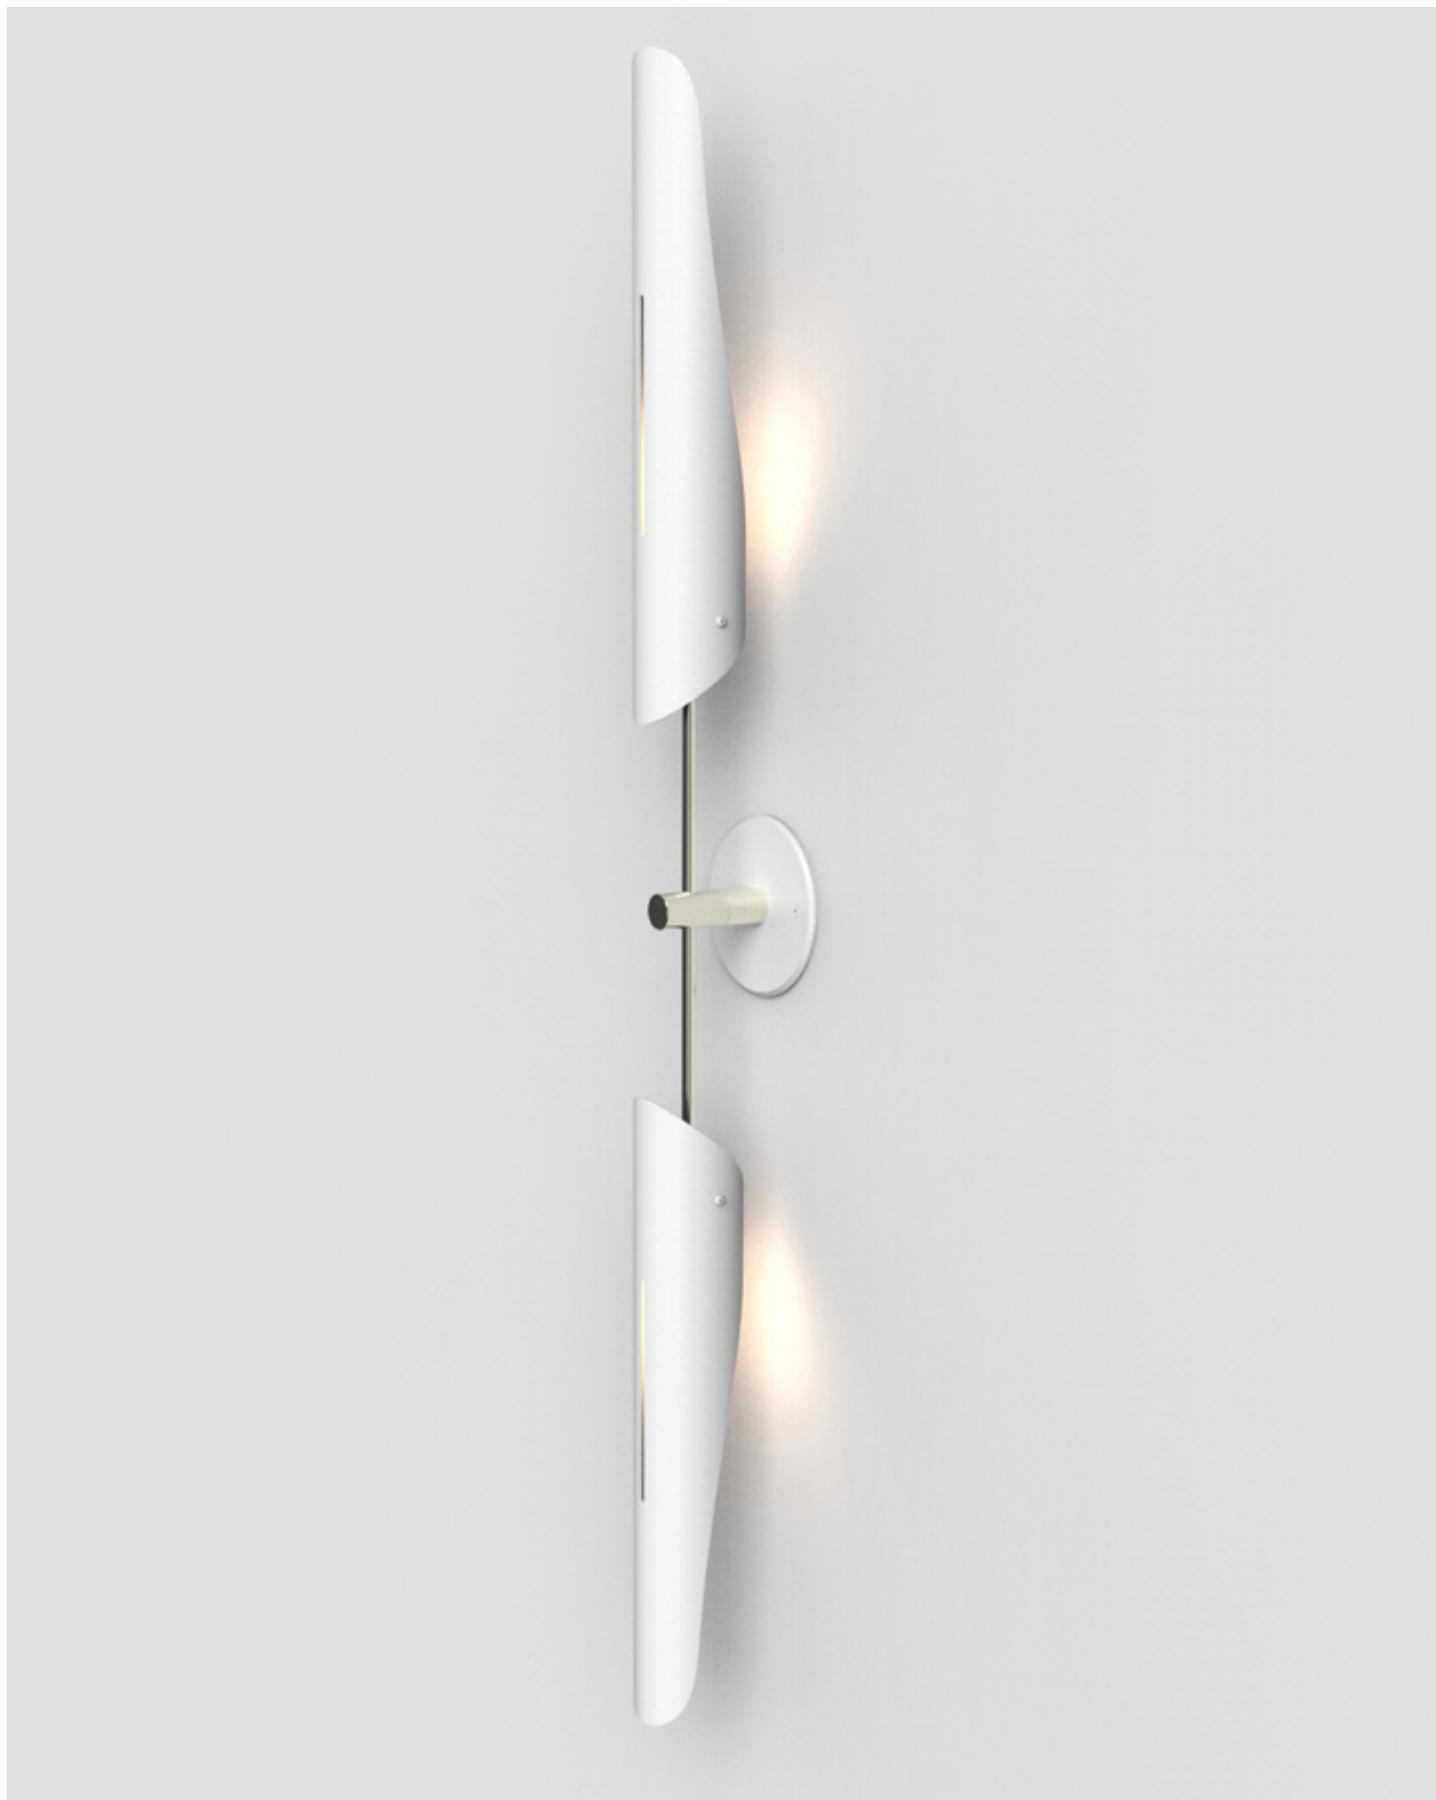

Sarus Sconce - Double

No. 223

TECHNICAL SPECIFICATIONS

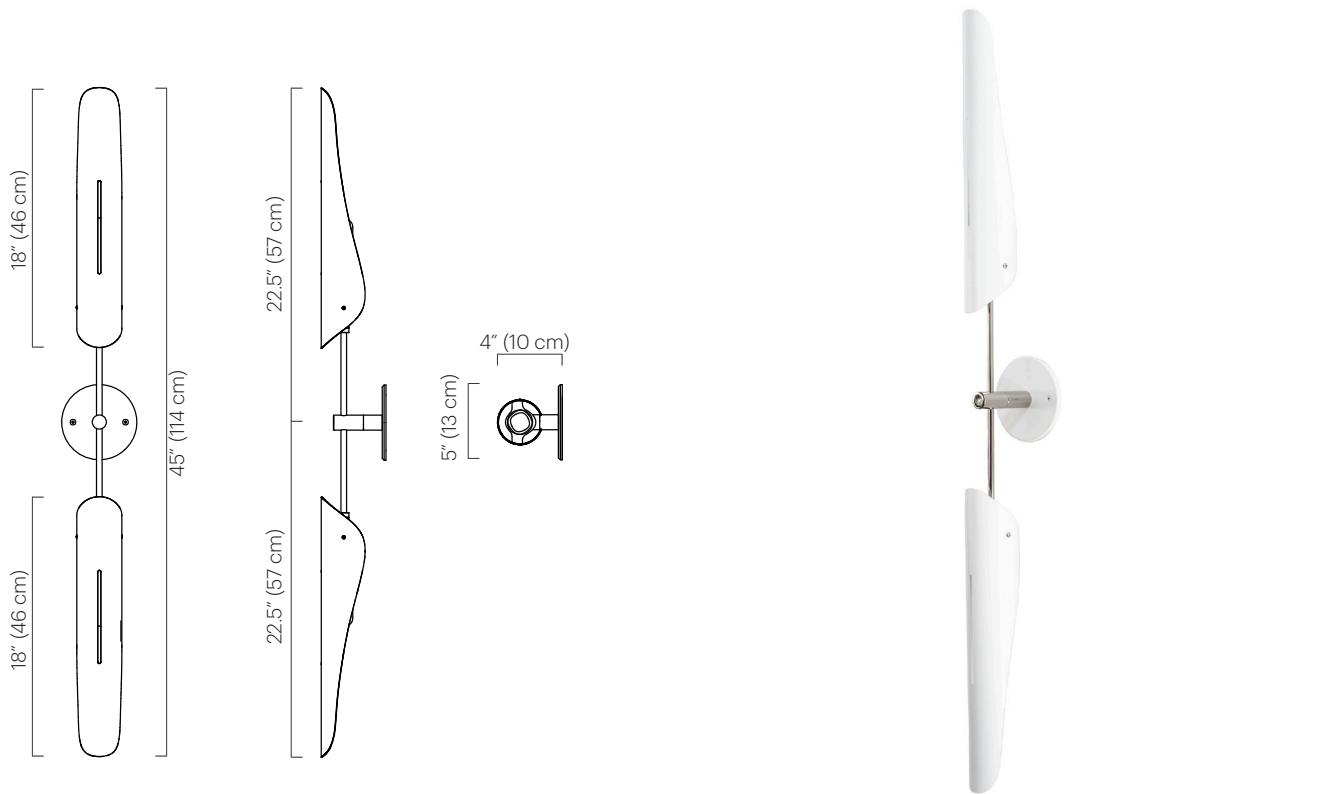

Description

The Sarus Sconce features two arms on opposing sides affixed to a powder coated steel wall mount. The shades swivel 320° to cast light directionally.

Materials

Shade: Powder coated aluminum
 Wall mount: Powder coated steel
 Hardware: Plated brass
 Arm: Plated steel
 Counterweight: Powder coated steel

Mount & Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: (2) T10 tubular incandescent medium base
 60W max
 220-240V: (2) E27 base (tubular 32mm suggested) 60W max
 Note: Bulbs not included.
 Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request)
 110-120V/- 6W/ 420 lm/ 3000K
 T38, E26
 3.7" L x 4.7" Ø
 ETL

Wattage

120 watts max

Weight

5lb (2.3 kg)

Remarks

UL Listed.
 Hardwired is standard.
 Indoor use and dry locations only.
 Wall mount consistent with shade color.
 Counterweights are black.
 ADA compliant.

Dimensions

4" D x 5" W x 45" H
 (10 D x 13 W x 114 cm H)
 Wall mount diameter: 5" (13 cm)
 Shade: 18" L x 3" Ø
 (46 L x 8 Ø cm)





Sarus Mobile, 2 Tier

No. 428

TECHNICAL SPECIFICATIONS

Quickship

Select finishes and colors available.

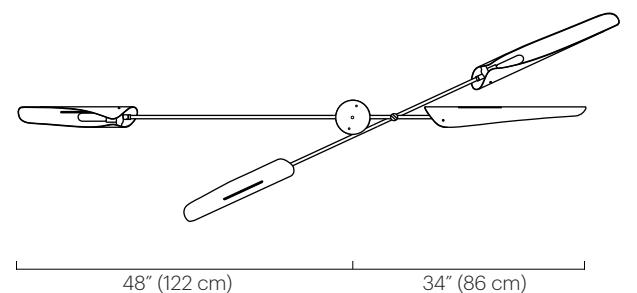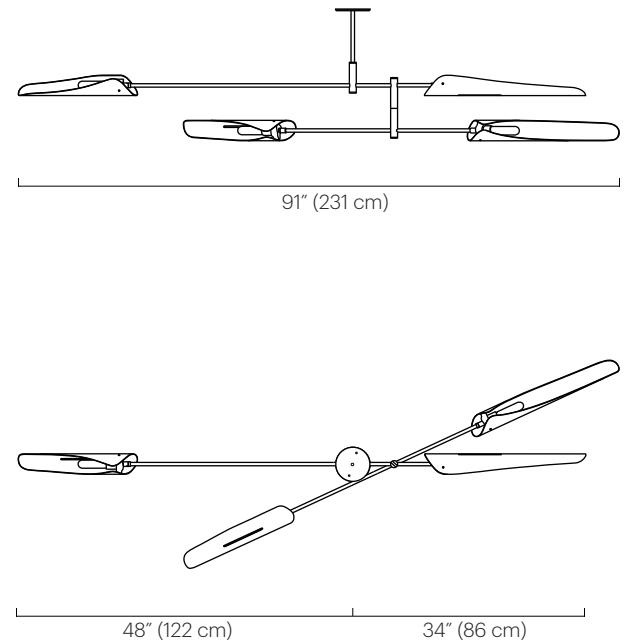

Description

The Sarus Mobile is a carefully balanced fixture, featuring two tiers of differing lengths. Each tier has one large and one small Sarus shade. Tiers scissor open when installed; arrangement is adjustable on site. Shades swivel 320° to cast light directionally.

Materials

Shades: Powder coated aluminum
Frame: Plated steel
Ceiling mount: Powder coated steel
Drop: Plated steel

Custom finishes available.

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: (4)T10 tubular incandescent medium base
60W max
220-240V: (4)E27 base (tubular
32mm suggested) 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request)
110-120V~/ 6W/ 420 lm/ 3000K
T38, E26
3.7" L x 4.7" Ø
ETL

Wattage

240 watts max

Weight

15 lbs (6.8 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Tier lengths cannot be customized.
Each tier has two shades.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

Tier 1: 82" (208 cm)
Tier 2: 69" (175 cm)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height:
12.5" (32 cm)
Large Shade: 23" L x 3" Ø
(58 L x 8 Ø cm)
Small Shade: 18" L x 3" Ø
(46 L x 8 Ø cm)




Select finishes and colors available.



Sarus Mobile, 3 Tier

No. 428

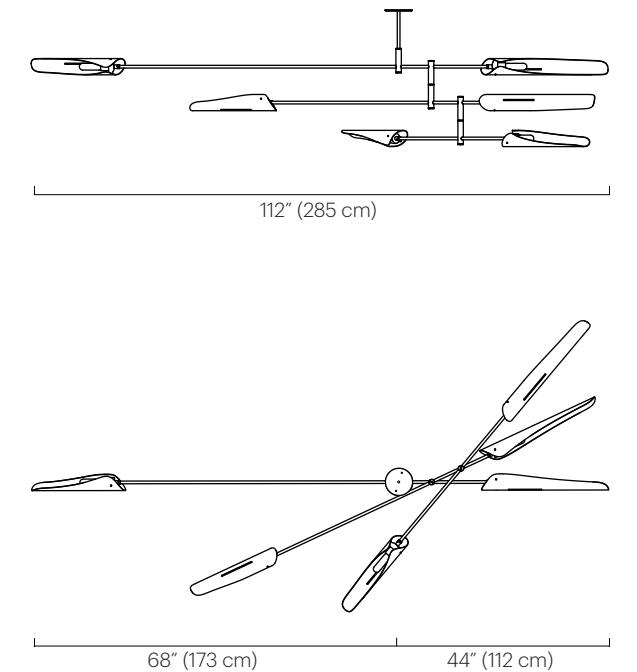

Description

The Sarus Mobile is a carefully balanced fixture, featuring three tiers of differing lengths. Each tier has one large and one small Sarus shade. Tiers scissor open when installed; arrangement is adjustable on site. Shades swivel 320° to cast light directionally.

Materials

Shades: Powder coated aluminum
Frame: Plated steel
Ceiling mount: Powder coated steel
Drop: Plated steel

Custom finishes available.

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: (6)T10 tubular incandescent medium base 60W max
220-240-V: (6)E27 base (tubular 32mm suggested) 60W max
Note: Bulbs not included. Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request)
110-120V-/ 6W/ 420 lm/ 3000K
T38, E26
3.7" L x 4.7" Ø
ETL

Wattage

360 watts max

Weight

25 lbs (11.3 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Tier lengths cannot be customized.
Due to the length of tiers, a natural arc occurs on the longest tier.
Each tier has two shades.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.


Dimensions

Tier 1: 112" (285 cm)
Tier 2: 82" (208 cm)
Tier 3: 69" (175 cm)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height: 19" (48 cm)
Large Shade: 23" L x 3" Ø
(58 L x 8 Ø cm)
Small Shade: 18" L x 3" Ø
(46 L x 8 Ø cm)

Sarus Mobile, 4 Tier

TECHNICAL SPECIFICATIONS

No. 428

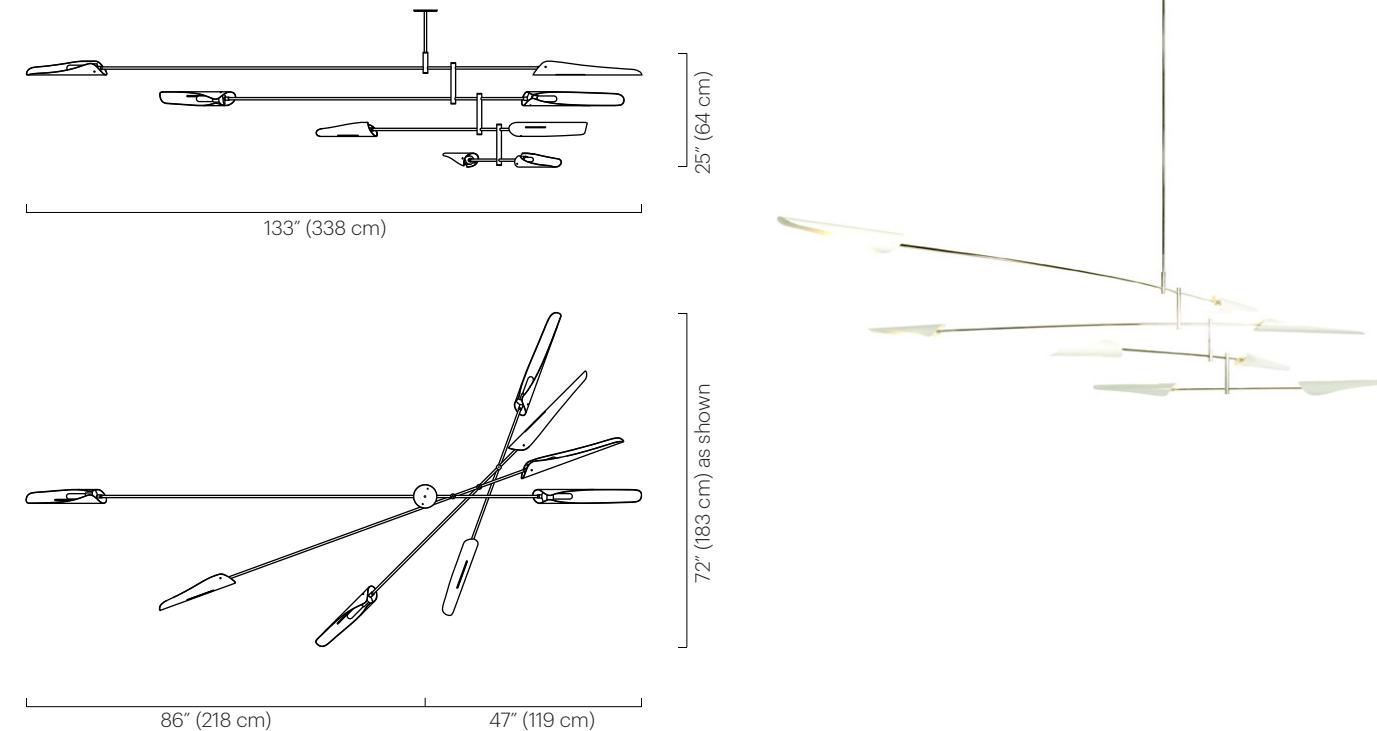

Description

The Sarus Mobile is a carefully balanced fixture, featuring four tiers of differing lengths. Each tier has one large and one small Sarus shade. Tiers scissor open when installed; arrangement is adjustable on site. Shades swivel 320° to cast light directionally.

Materials

Shades: Powder coated aluminum
Frame: Plated steel
Ceiling mount: Powder coated steel
Drop: Plated steel

Custom finishes available.

Mount & Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: (8)T10 tubular incandescent medium base 60W max
220-240V: (8)E27 base (tubular 32mm suggested) 60W max
Note: Bulbs not included. Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request)
110-120V-/ 6W/ 420 lm/ 3000K
T38, E26
3.7" L x 4.7" Ø
ETL

Wattage

480 watts max

Weight

35 lbs (15.8 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Tier lengths cannot be customized.
Due to the length of tiers, a natural arc occurs on the two longest tiers.
Each tier has two shades.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

Tier 1: 133" (338 cm)
Tier 2: 112" (285 cm)
Tier 3: 82" (208 cm)
Tier 4: 69" (175 cm)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height: 26" (66 cm)
Large Shade: 23" L x 3" Ø
(58 L x 8 Ø cm)
Small Shade: 18" L x 3" Ø
(46 L x 8 Ø cm)



Torroja Collection

Inspired by the architecture of Spanish engineer Eduard Torroja, this Collection features organic sculptural forms, balanced on an asymmetrical axis allowing for subtle movement.




222 Torroja Sconce - Single
Black Satin + Brushed Brass

Torroja Sconce - Single

No. 222

TECHNICAL SPECIFICATIONS

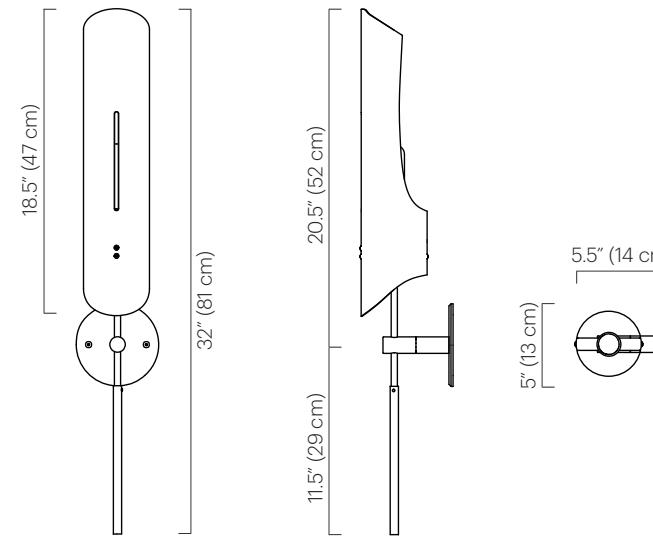

Description

The Torroja Sconce features two arms on opposing sides affixed to a powder coated steel wall mount. A single shade is balanced upright with a counterweight. The shade swivels 320° to cast light directionally.

Materials

Shade: Powder coated aluminum
Wall mount: Powder coated steel
Hardware: Plated brass
Arm: Plated steel
Counterweight: Powder coated steel

Mount & Shade Color

- Black Satin (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: T10 tubular incandescent medium base
60W max
220-240V: E27 base (tubular 32mm suggested) 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request)
110-120V-/ 6W/ 420 lm/ 3000K
T38, E26
3.7" L x 4.7" Ø
ETL

Wattage

60 watts max

Weight

7lb (3.2 kg)

Remarks

UL Listed.
Hardwired is standard.
Indoor use and dry locations only.
Wall mount consistent with shade color.
Counterweights are black.

Dimensions


5.5" D x 5" W x 32" H
(14 D x 13 W x 81 cm H)
Wall mount diameter: 5" (13 cm)
Shade: 4" Ø x 18.5" L
(10 Ø x 47 cm L)



Torroja Sconce - Double

TECHNICAL SPECIFICATIONS

No. 224

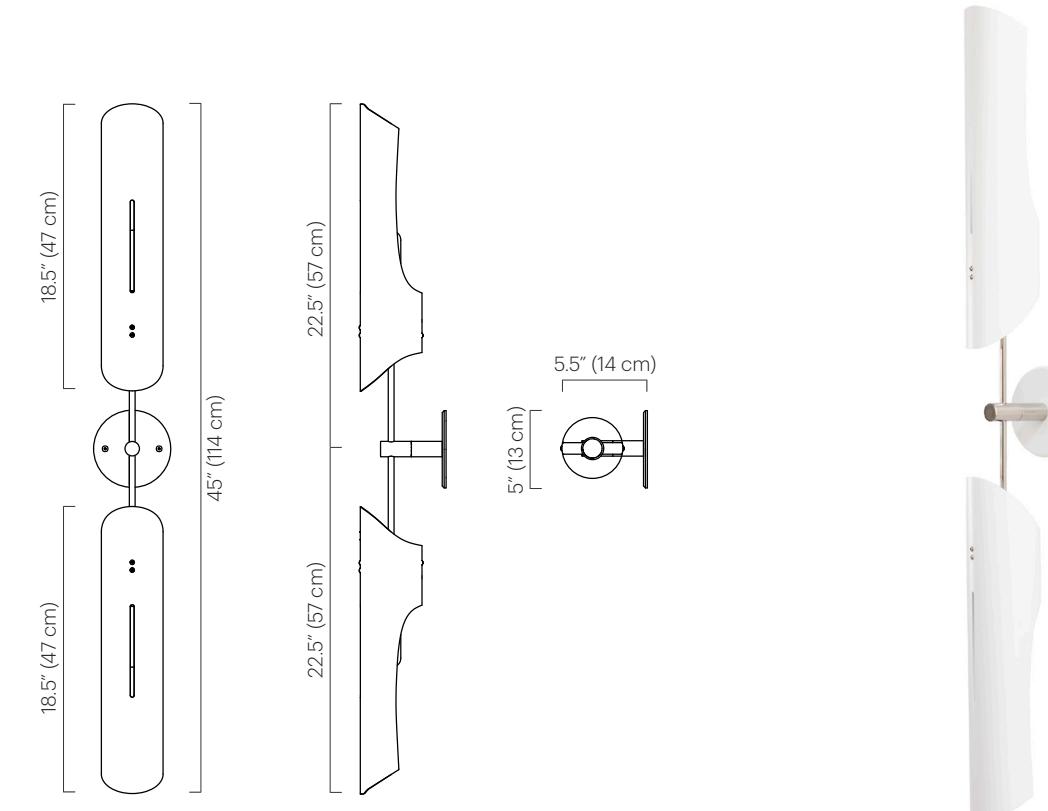

Description

The Torroja Sconce features two arms on opposing sides affixed to a powder coated steel wall mount. The shades swivel 320° to cast light directionally.

Materials

Shade: Powder coated aluminum
 Wall mount: Powder coated steel
 Hardware: Plated brass
 Arm: Plated steel
 Counterweight: Powder coated steel

Custom finishes available.

Mount & Shade Color

- Black Satin (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: (2) T10 tubular incandescent medium base
 60W max
 220-240V: (2) E27 base (tubular 32mm suggested) 60W max
 Note: Bulbs not included.
 Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request)
 110-120V-/ 6W/ 420 lm/ 3000K
 T38, E26
 3.7" L x 4.7" Ø
 ETL

Wattage

120 watts max

Weight

7lb (3.2 kg)

Remarks

UL Listed.
 Hardwired is standard.
 Indoor use and dry locations only.
 Wall mount consistent with shade color.
 Counterweights are black.

Dimensions


5.5" D x 5" W x 45" H
 (14 D x 13 W x 114 cm H)
 Wall mount diameter: 5" (13 cm)
 Shade: 4" Ø x 18.5" L
 (10 Ø x 47 cm L)



Torroja Standing Lamp

TECHNICAL SPECIFICATIONS

No. 309

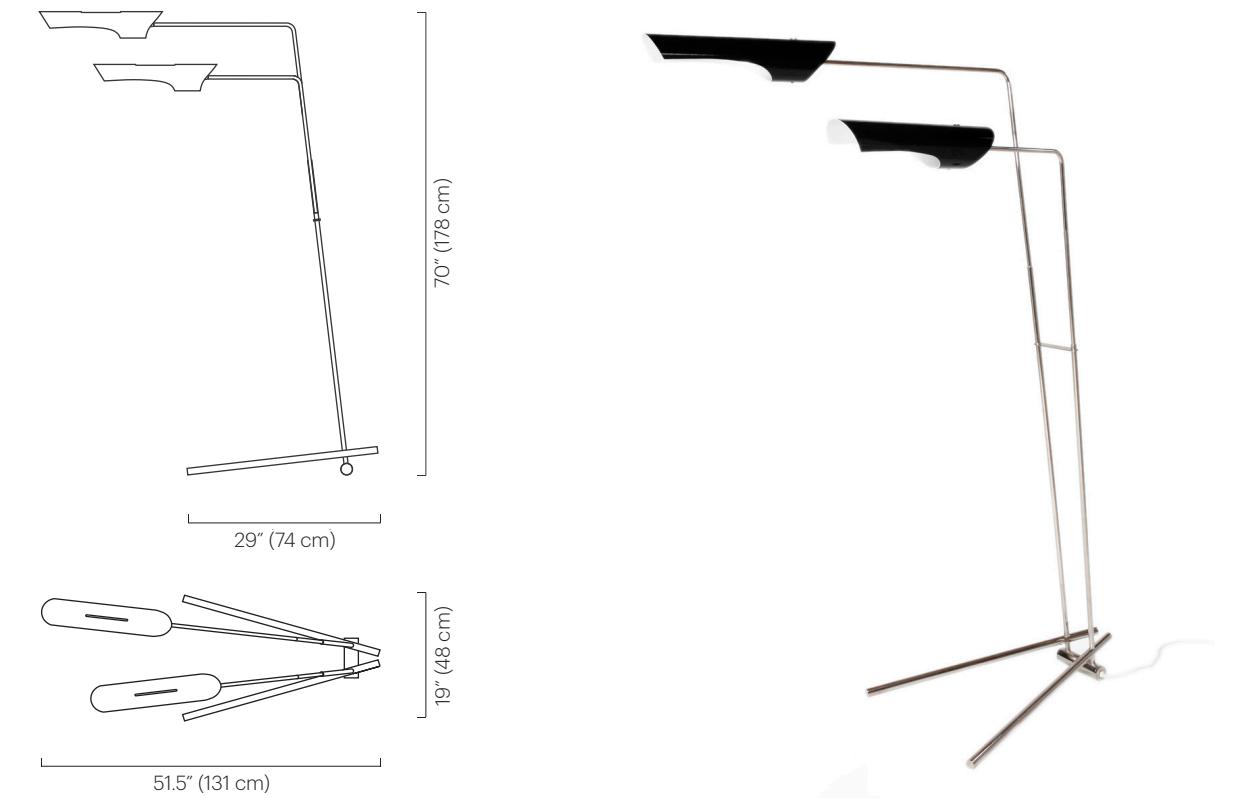

Description

The Torroja Standing Lamp features a plated steel frame with two arms that extend over the base. Powder coated aluminum shades rotate 320° to cast light directionally.

Materials

Shades: Powder coated aluminum
Frame: Plated steel

Shade Color

● Black Satin (ivory satin interior)
○ Ivory Satin (ivory satin interior)
○ White Satin (white satin interior)
Custom colors available.

Finish

● Polished Nickel

Lamping

120V: (2)T10 tubular incandescent bulbs
medium base 40W max
220-240V: (2)E27 base (tubular 32mm suggested) 40W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request)
110-120V~/ 6W/ 420 lm/ 3000K
T38, E26
3.7" L x 4.7" Ø
ETL

Wattage

80 watts max

Weight

30 lbs (13.6 kg)

Remarks

UL listed.
Dimmer switch located on cord.
Arm height is not adjustable.
Cord color is black;
length approx. 10 feet.
Indoor use and dry locations only.




Dimensions

Base: 19" W x 29" D
(48 W x 74 cm D)
70" H x 51.5" D
(178 H x 131 cm D)
Shade: 4" Ø x 18.5" L
(10 Ø x 47 cm L)

Torroja Tiered Pendant, 2 Tier

TECHNICAL SPECIFICATIONS

No. 425

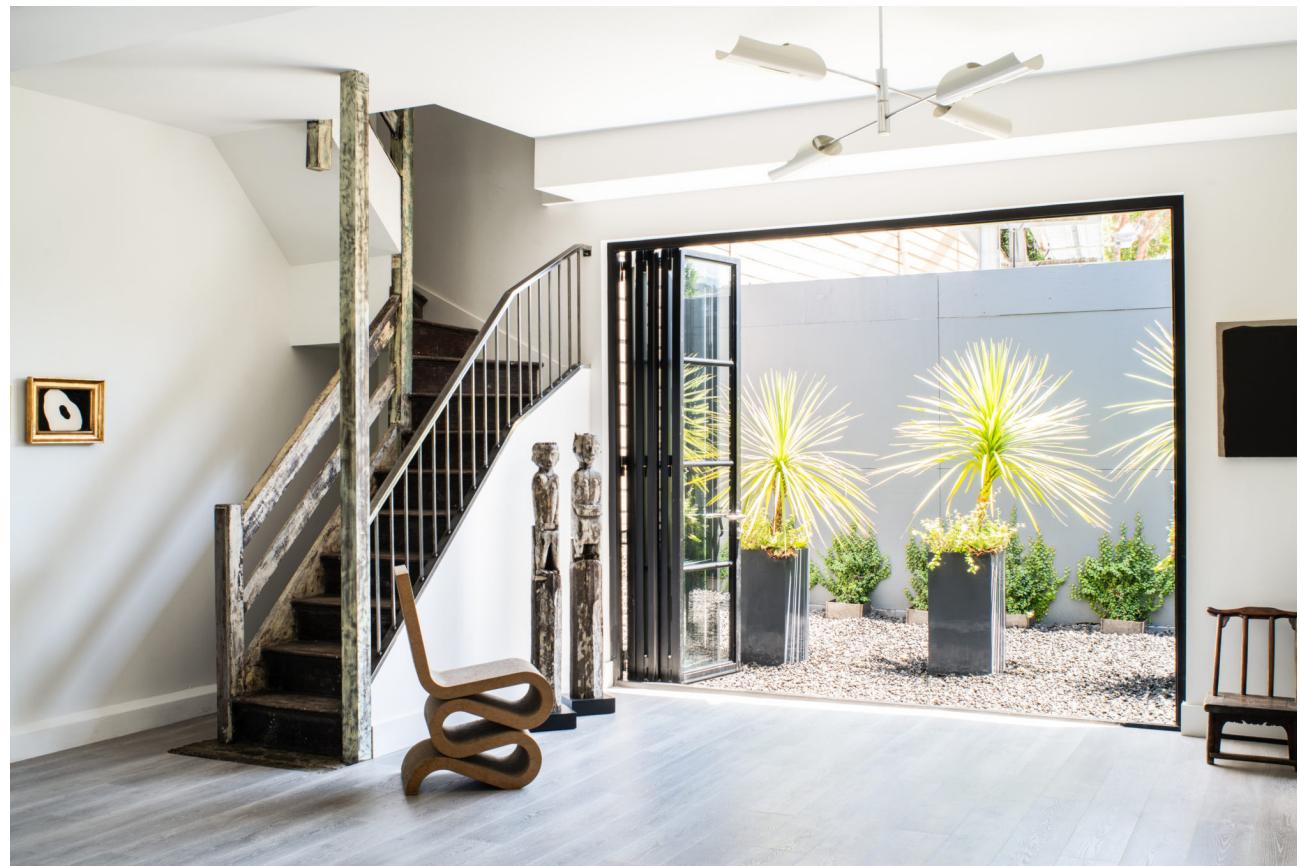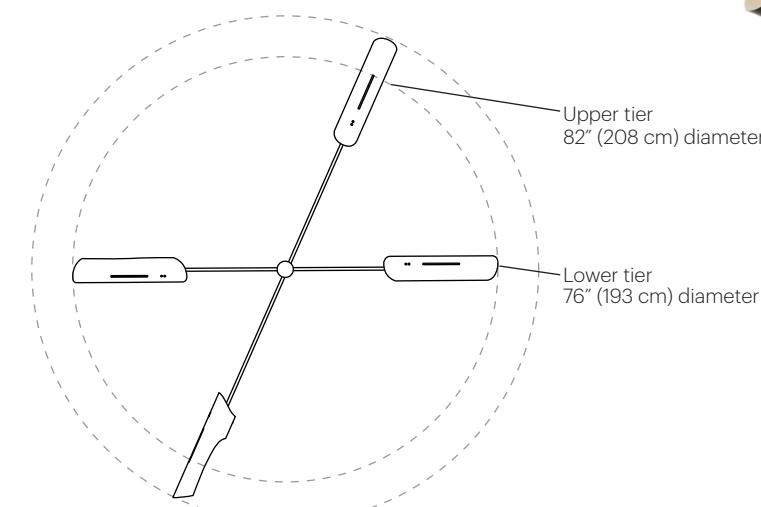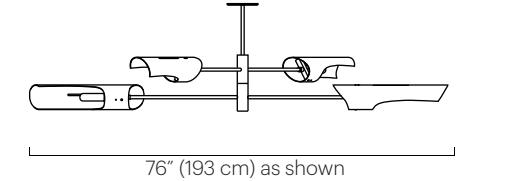

Description

The Torroja Tiered Pendant features a plated frame customizable by the number and length of the tiers. Each tier consists of two shades. Tiers scissor open and are adjustable on site. Shades rotate 320° to cast light directionally.

Materials

Shades: Powder coated aluminum
Frame: Plated steel
Ceiling mount: Powder coated steel
Drop: Plated steel

Custom finishes available.

Shade Color

- Black Satin (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping (Two shades per tier)

120V: (2)T10 tubular incandescent medium base 60W max
220-240V: (2)E27 base (tubular 32mm suggested) 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request)
110-120V/- 6W/ 420 lm/ 3000K
T38, E26
3.7" L x 4.7" Ø
ETL

Wattage

120 watts max per tier

Weight

13 lbs (6 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Each tier has two shades.
Specify tier lengths.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

Standard tier diameters:
52" / 65" / 76" / 82"
(132 cm / 165 cm / 193 cm / 208 cm)
or specify custom tier diameters.
Min. length of tier: 48" (122 cm)
Max. length of tier: 120" (305 cm)
Shade: 4" Ø x 18.5" L
(10 Ø x 47 cm L)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height:
11" (28 cm)



425 Torroja Tiered Pendant 3 Tier
Black Satin + Polished Nickel



Torroja Tiered Pendant, 3 Tier

No. 425

TECHNICAL SPECIFICATIONS

Quickship

Select finishes and colors available.

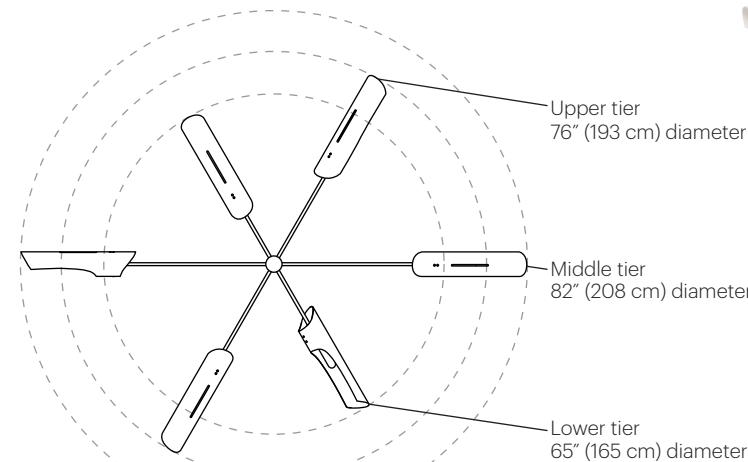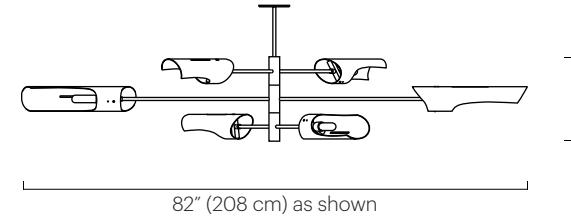

Description

The Torroja Tiered Pendant features a plated frame customizable by the number and length of the tiers. Each tier consists of two shades. Tiers scissor open and are adjustable on site. Shades rotate 320° to cast light directionally.

Materials

Shades: Powder coated aluminum
Frame: Plated steel
Ceiling mount: Powder coated steel
Drop: Plated steel

Shade Color

- Black Satin (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping (Two shades per tier)

120V: (2)T10 tubular incandescent medium base 60W max
220-240V: (2)E27 base (tubular 32mm suggested) 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Tala T38 LED Bulb

(Available per request)
110-120V/- 6W/ 420 lm/ 3000K
T38, E26
3.7" L x 4.7" Ø
ETL

Wattage

120 watts max per tier

Weight

18 lbs (8 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Each tier has two shades.
Specify tier lengths.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.


Dimensions

Standard tier diameters:
52" / 65" / 76" / 82"
(132 cm / 165 cm / 193 cm / 208 cm)
or specify custom tier diameters.
Min. length of tier: 48" (122 cm)
Max. length of tier: 120" (305 cm)
Shade: 4" Ø x 18.5" L
(10 Ø x 47 cm L)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height:
15.5" (39 cm)

Torroja Tiered Mobile

TECHNICAL SPECIFICATIONS

No. 429

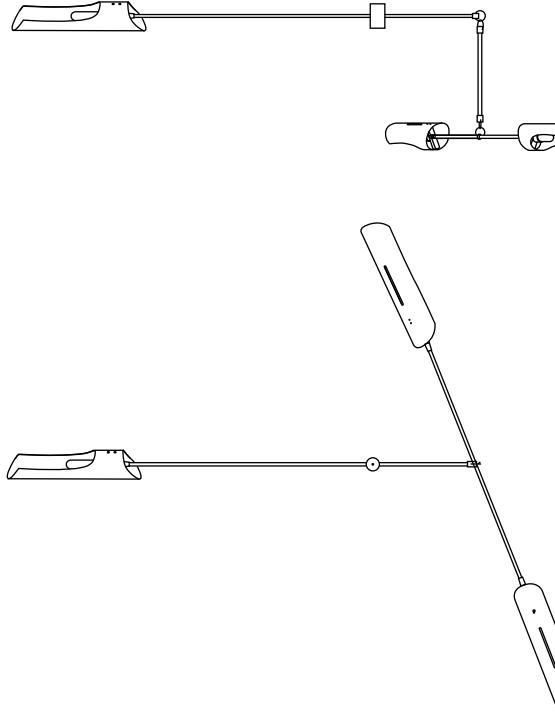

Single tier shown above



Shown above with three tiers

Description

The Torroja Tiered Mobile is a totally customizable fixture. The quantity and size of the tiers can be specified for site conditions. Each tier is comprised of three segments, with three shades that balance on an asymmetrical axis that allows gentle movement. Torroja shades rotate 320° to cast light directionally.

Materials

Shades: Powder coated aluminum
Ceiling mount: Powder coated steel
Frame: Plated steel
Hub: Plated aluminum (for nickel finish) or brass (for brass finish)
Drop: Stainless steel cable

Shade Color

- Black Satin (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping (Three shades per tier)

120V: (3)T10 tubular incandescent medium base 60W max
220-240V: (3)E27 base (tubular 32mm suggested) 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

IMPORTANT: Identical bulbs must be used in each socket in order for fixture to properly balance.

Tala T38 LED Bulb

(Available per request)
110-120V~/ 6W/ 420 lm/ 3000K
T38, E26
3.7" L x 4.7" Ø
ETL

Wattage

180 watts max per tier

Weight

Weight varies; depending on number of tiers and dimensions.
Each tier: approx. 8-10 lbs (3.6-4.5 kg)

Remarks

Specify drop length.
Approx. 6" of extra cable and cord included.
Specify number of tiers.
Two tier minimum (six shades).
Each tier has three shades.
Specify tier diameter.
Ceiling mount consistent with shade color.
White electrical cord is standard.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

Fixture custom made based on client specifications.
Minimum diameter: 60" (152 cm)
Maximum diameter: 120" (305 cm)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height:
Two tiers: 24" (61 cm)
Three tiers: 31" (79 cm)
Shade: 4" Ø x 18.5" L
(10 Ø x 47 cm L)



Bottle + Bullet Collection

Iconic shades elegantly re-arranged. The Bottle + Bullet Series, our first collections, reveal the unexpected in the familiar—distilling once-known forms in a new expression.




One Arm Sconce

TECHNICAL SPECIFICATIONS

No. 202

Quickship

Select finishes and colors available.

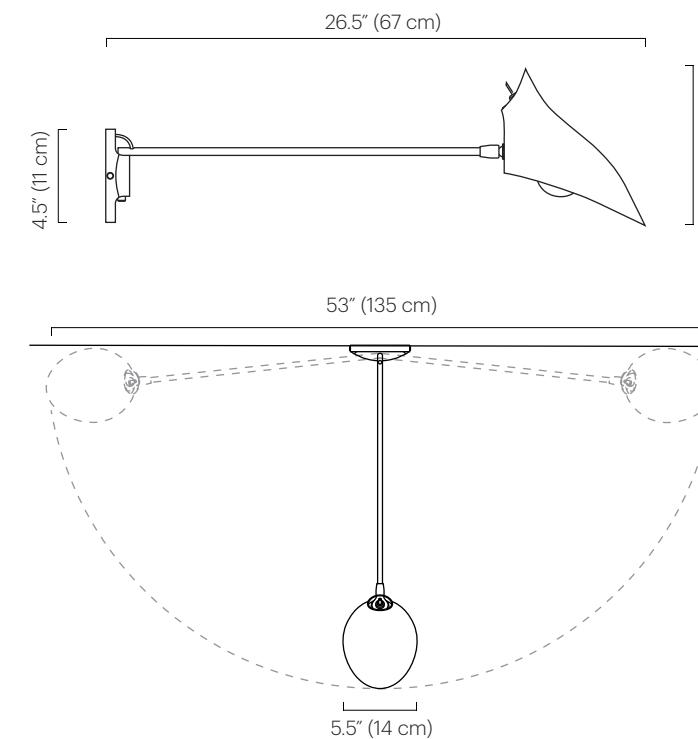

Description

The One Arm Sconce features a single arm affixed to a solid wood wall mount and steel mounting ring. The arm swings from side to side with a handspun aluminum Bottle shade. The shade rotates 320° to cast light directionally.

Materials

Shade: Powder coated aluminum
Wall Mount: Finished wood
Arm: Plated steel
Mounting Ring: Plated steel

Weight

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

Wall Mount

- (matches specified shade)
- Black Satin: Opaque paint on maple
- Grey Gloss: Opaque paint on maple
- Ivory Satin: Opaque paint on maple

Also available:

- Natural Walnut (clear finish)
- Natural Maple (clear finish)

Dimensions

Arm Length: 26.5" (67 cm)
Wingspan: 53" (135 cm)
Wall mount diameter: 4.5" (11 cm)
Shade: 8.5" H x 5.5" W x 8.5" D
(22 H x 14 W x 22 cm D)

Remarks

UL listed.
Hardwired is standard.
Custom cord & plug available; length approx 6'.
Cord color is black.
120V: Switch is on shade.
220-240V: Hardwired to wall; no switch on shade.
Custom arm length available (36" max).
Mounting ring matches arm finish.
Walnut and maple wood mounts will vary in color from fixture to fixture.
Indoor use and dry locations only.




Two Arm Sconce

No. 203

TECHNICAL SPECIFICATIONS

Quickship

Select finishes and colors available.

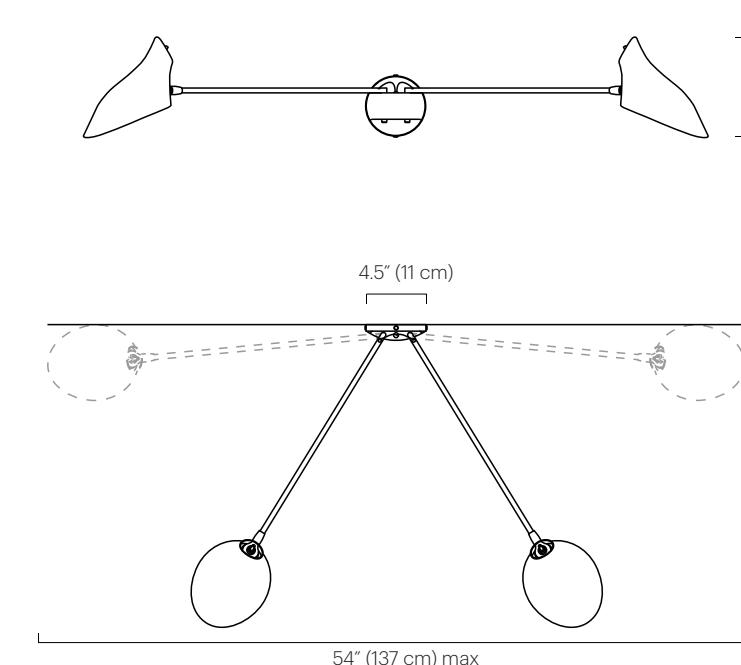

Description

The Two Arm Sconce features dual arms affixed to a solid wood wall mount and steel mounting ring. The arms swing from side to side with handspun aluminum Bottle shades. The shades rotate 320° to cast light directionally.

Materials

Shade: Powder coated aluminum
 Wall Mount: Finished wood
 Arm: Plated steel
 Mounting Ring: Plated steel

Custom finishes available.

Weight

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Wall Mount

- (matches specified shade)
- Black Satin: Opaque paint on maple
- Grey Gloss: Opaque paint on maple
- Ivory Satin: Opaque paint on maple

Also available:
 ● Natural Walnut (clear finish)
 ● Natural Maple (clear finish)

Lamping

120V: (2)A19 or A15
 medium base 60W max
 220-240V: (2)E14 base golf ball
 60W max
 Note: Bulbs not included.
 Halogen bulbs not recommended.

Wattage


120 watts max

Remarks

UL listed.
 Hardwired is standard.
 Custom cord & plug available;
 length approx 6'.
 Cord color is black.
 120V: Switch is on shade.
 220-240V: Hardwired to wall;
 no switch on shade.
 Custom arm length available
 (36" max).
 Mounting ring matches arm finish.
 Walnut and maple wood mounts
 will vary in color from
 fixture to fixture.
 Indoor use and dry locations only.

Dimensions


Arm Length: 26.5" (67 cm)
 Wingspan: 54" (137 cm)
 Wall mount diameter: 4.5" (11 cm)
 Shade: 8.5" H x 5.5" W x 8.5" D
 (22 H x 14 W x 22 cm D)

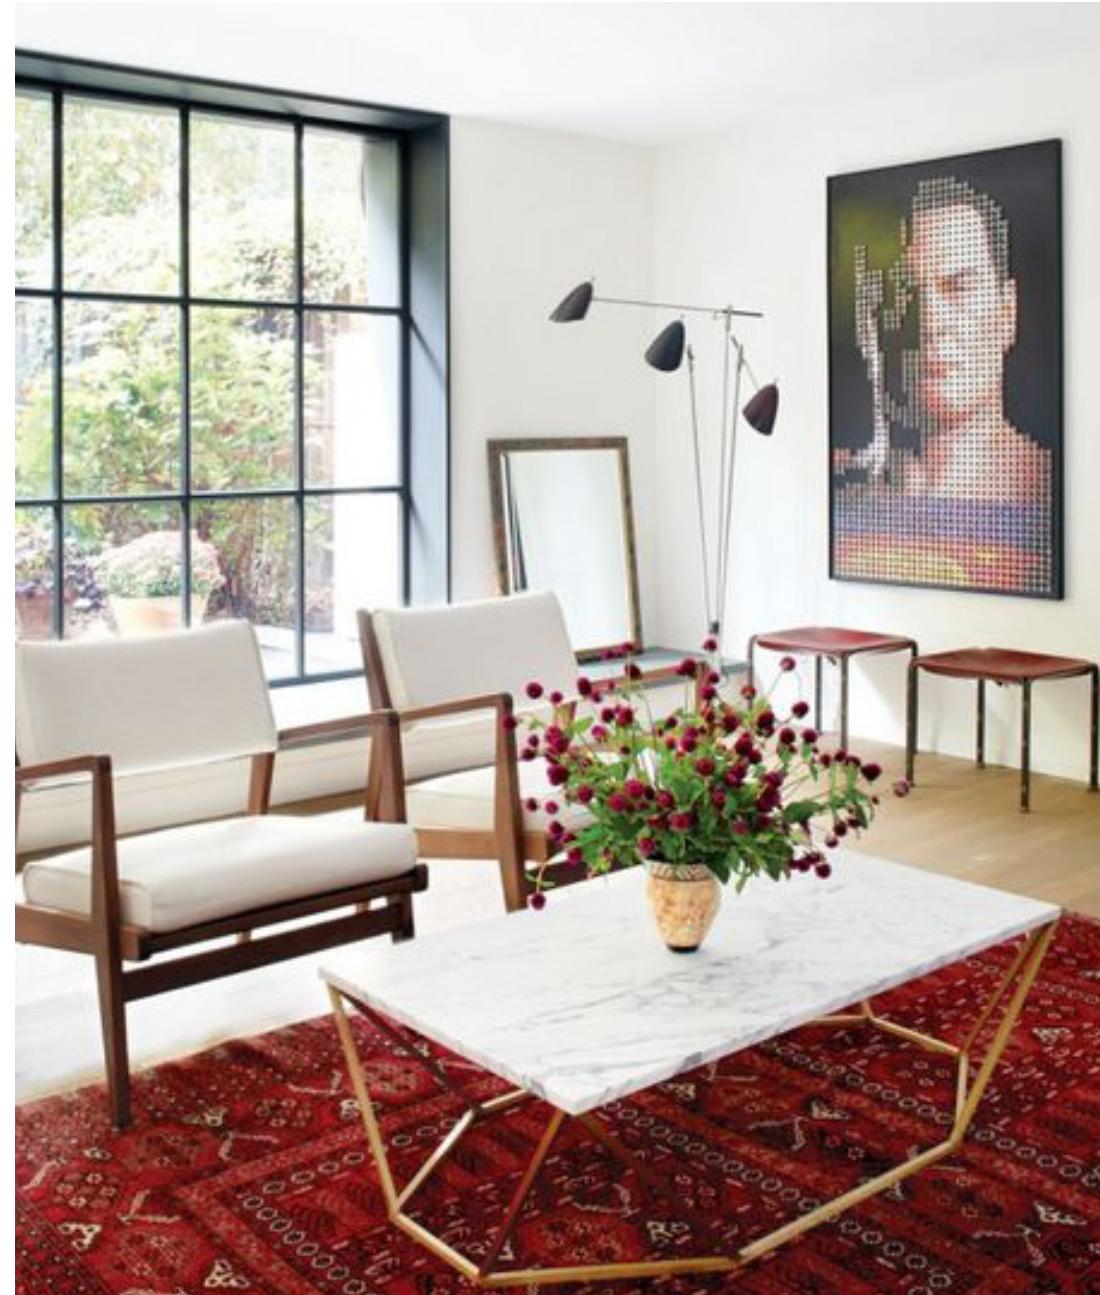

Tripod

No. 303

TECHNICAL SPECIFICATIONS

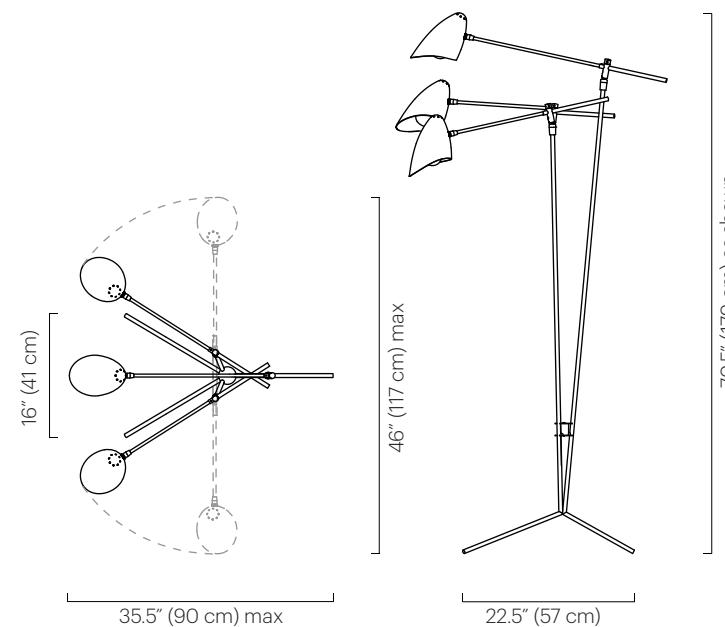

Bullet shade option



Bottle shade option

Description

The Tripod features three counterweighted arms that adjust up and down and swivel side to side. Handspun shades on each arm rotate 320° to cast light directionally. May be ordered with Bullet or Bottle shades.

Materials

Shades: Powder coated aluminum
Frame: Plated steel
Counterweight: Powder coated steel

Custom colors available.

Finish

Polished Nickel
Brushed Brass
Oil Rubbed Bronze

Shade Color Bullet

Black Satin (ivory satin interior)
Ivory Satin (ivory satin interior)
White Satin (white satin interior)

Shade Color Bottle

Black Satin (ivory satin interior)
Grey Gloss (ivory satin interior)
Ivory Satin (ivory satin interior)
White Satin (white satin interior)

Lamping

120V: (3)A19 or A15
medium base 60W max
220-240V:
Bullet: (3)E27 base 60W max
Bottle: (3)E14 base 60W max

Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

180 watts max

Weight

15 lbs (6.8 kg)

Remarks

Not UL listed.
Bullet shade: On/Off dimmer switch on cord.
Bottle shade:
120V: On/Off switch on shade,
dimmer on cord.
220-240V: On/Off dimmer switch on cord.

Remarks Continued

Cord color is black;
length approx. 10 feet.
Counterweight is black.
Indoor use and dry locations only.


Dimensions

22.5" D x 16" W x 65" H
(57 D x 41 W x 165cm H)
Max depth: 35.5" (90 cm)
Shade height variable:
Min height: 42" (107 cm)
Max height: 78" (198 cm)
Wingspan: 46" (117 cm)
Bullet Shade: 9" H x 6" W x 6.5" D
(23 H x 15 W x 17 cm D)
Bottle Shade: 8.5" H x 6" W 8.5" D
(22 H x 15 W x 22 cm D)

Doublepod

TECHNICAL SPECIFICATIONS

No. 305

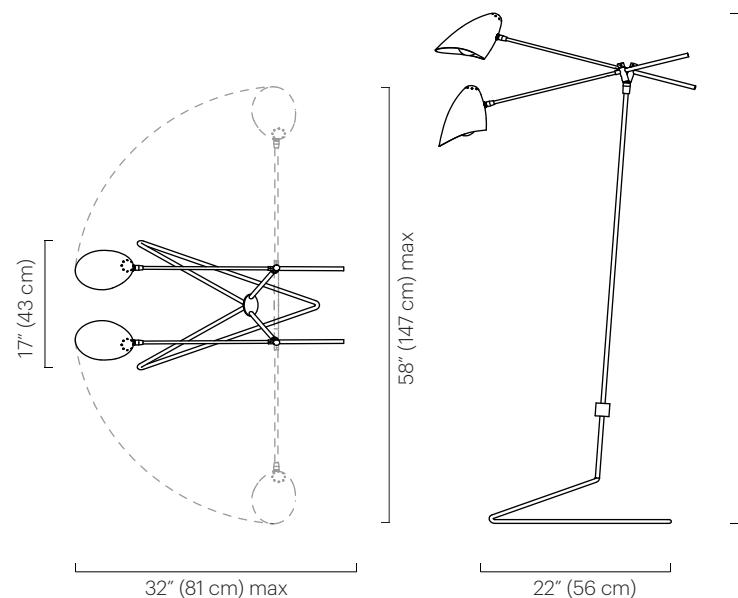

Description

The Doublepod is a standing lamp that features two counterweighted arms that adjust up and down and swivel side to side. Handspun shades rotate 320° to cast light directionally. May be ordered with Bullet or Bottle shades.

Materials

Shades: Powder coated aluminum
Frame: Plated steel
Counterweight: Powder coated steel

Custom colors available.

Finish

Polished Nickel
Brushed Brass
Oil Rubbed Bronze

Custom finishes available.

Shade Color Bullet

Black Satin (ivory satin interior)
Ivory Satin (ivory satin interior)
White Satin (white satin interior)

Shade Color Bottle

Black Satin (ivory satin interior)
Grey Gloss (ivory satin interior)
Ivory Satin (ivory satin interior)
White Satin (white satin interior)

Lamping

120V: (2)A19 or A15
medium base 60W max
220-240V:
Bullet: (2)E27 base 60W max
Bottle: (2)E14 base 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

120 watts max

Weight

15 lbs (7 kg)

Remarks

Not UL listed.
Bullet shade: On/Off: dimmer switch on cord.
Bottle shade:
120V: On/Off switch on shade,
dimmer on cord.
220-240V: On/Off dimmer switch on cord.

Remarks Continued

Cord color is black;
length approx. 10 feet.
Counterweight is black.
Indoor use and dry locations only.

Dimensions


22" D x 17" W x 61" H
(56 D x 43 W x 155cm H)
Max depth: 32" (81 cm)
Shade height variable:
Min height: 45" (114 cm)
Max height: 72" (183 cm)
Wingspan: 58" (147 cm)
Bullet Shade: 9" H x 6" W x 6.5" D
(23 H x 15 W x 17 cm D)
Bottle Shade: 8.5" H x 6" W 8.5" D
(22 H x 15 W x 22 cm D)



405 Bottle Tiered Mobile 5 Tier
Black Satin + Brushed Brass

Bottle Tiered Mobile

No. 405

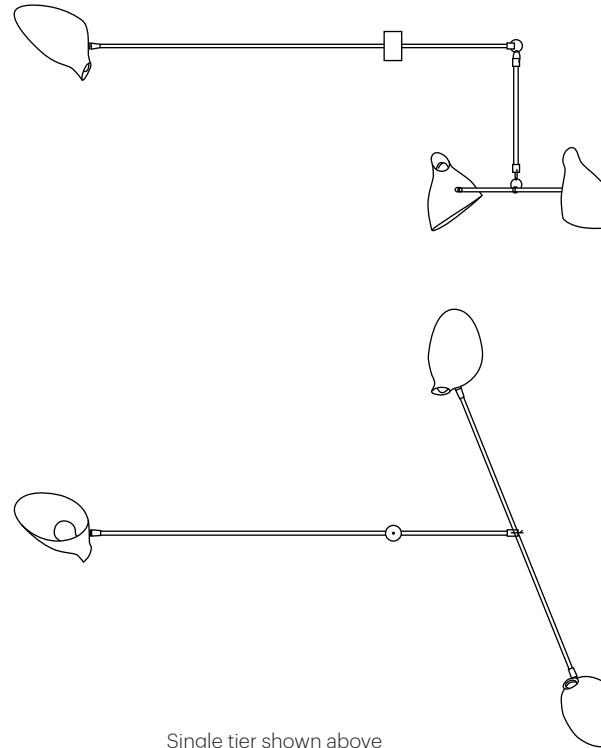

Single tier shown above



Shown above with three tiers

Description

The Bottle Tiered Mobile is a totally customizable fixture. The quantity and size of the tiers can be specified for site conditions. Each tier is comprised of three segments, with three shades that balance on an asymmetrical axis that allows gentle movement. Large bottle shades rotate 320° to cast light directionally.

Materials

Shades: Powder coated aluminum
Ceiling mount: Powder coated steel
Frame: Plated steel
Hub: Plated aluminum (for nickel finish) or brass (for brass finish)
Drop: Stainless steel cable

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping (Three shades per tier)

120V: (3)A19 or A15

medium base 60W max

220-240V: (3)E27 base 60W max

Note: Bulbs not included.

Halogen bulbs not recommended.

IMPORTANT: Identical bulbs must be used in each socket in order for fixture to properly balance.

Wattage

180 watts max per tier

Weight

Weight varies; depending on

number of tiers and dimensions.

Each tier: approx. 8-10 lbs

(3.6-4.5 kg)

Remarks

Specify drop length.
Approx. 6" of extra cable and cord included.

Remarks continued

Specify number of tiers.
Each tier has three shades.
Specify tier diameter.
Ceiling mount consistent with shade color.

White electrical cord is standard.
Additional weight support recommended for junction box installation.

Indoor use and dry locations only.

Dimensions

Fixture custom made based on client specifications.

Minimum diameter: 60" (152 cm)

Maximum diameter: 120" (305 cm)

Ceiling mount diameter: 5" (13 cm)

Minimum overall height:

Single tier: 18.5" (47 cm)

Two tiers: 28" (71 cm)

Three tiers: 35" (89 cm)



Shade: 13.5" L x 7" W x 9" D
(34 L x 18 W x 23 cm D)

TECHNICAL SPECIFICATIONS

Bottle Tiered Pendant

TECHNICAL SPECIFICATIONS

No. 407

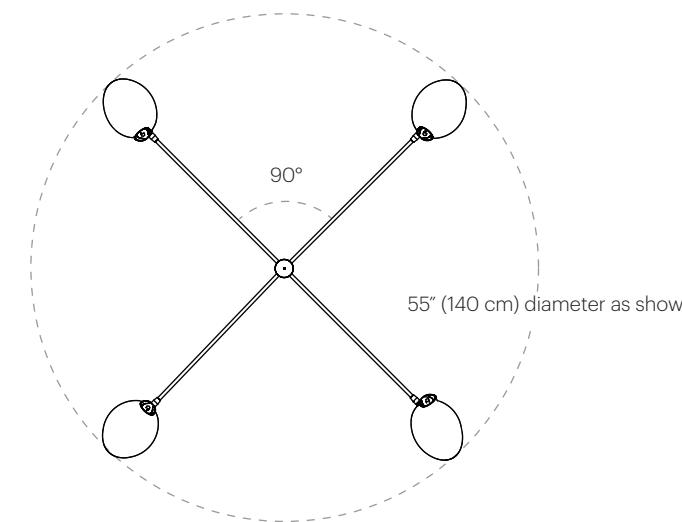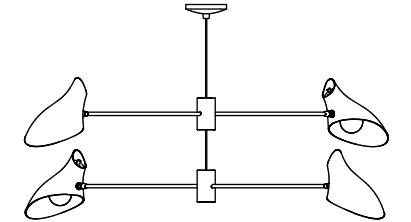

Shown above with two tiers

Description

The Bottle Tiered Pendant features a plated frame and hand spun Bottle shades that rotate 320° to cast light directionally. Customizable with longer or shorter tiers. Additional tiers can be added.

Materials

Shades: Powder coated aluminum
Ceiling Mount: Powder coated steel
Frame: Plated steel
Hub: Plated aluminum and brass
Drop: Stainless steel cable

Custom finishes available.

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping (Two shades per tier)

120V:

- (2)A19 or A15 medium base 60W max
- 220-240V: (2)E27 base 60W max

Note: Bulbs not included.

Halogen bulbs not recommended.

IMPORTANT: Identical bulbs must be used in each socket in order for fixture to properly balance.

Wattage

120 watts max per tier

Weight

Weight varies; depending on number of tiers and dimensions.
Two-tier fixture: approx. 9 lbs (4 kg)

Remarks

Specify drop length.
Approx. 6" of extra cable and cord included.
Specify tier length.
Specify number of tiers.

Remarks continued

Two tier minimum (Four shades). Each tier has two shades. Ceiling mount consistent with shade color. White electrical cord is standard. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions

Standard tier length: 55" x 55" (140 x 140 cm)
Tier length can be customized between 36 - 96" (91 - 244 cm)
Ceiling mount diameter: 5" (13 cm)
Standard distance between tiers: 7" (18 cm)
Minimum overall height: 15" (38 cm)
Shade: 8.5" H x 6" W x 8.5" D (22 H x 15 W x 22 cm D)



Shell Collection



The Shell Series—a hand-sculpted expression of organic form. Warm, tactile, and inspired by nature, each hand-formed Shell is subtly imperfect and unique.



Shell Sconce

TECHNICAL SPECIFICATIONS

No. 206

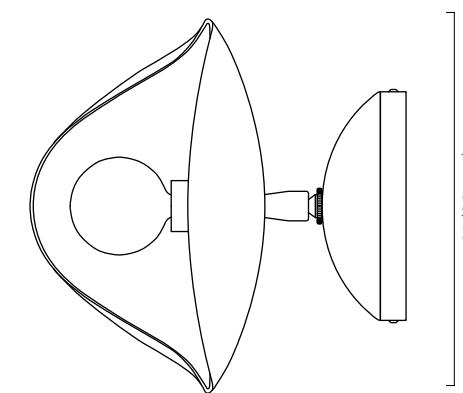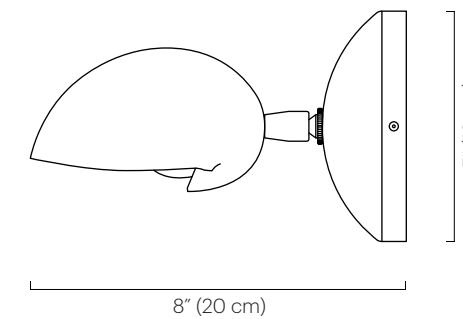

Description

Featuring a hand-formed Shell shade, the Shell Sconce rotates 320 degrees to cast light directionally.

Materials

Shade: Powder coated aluminum
Wall mount: Powder coated steel
Hardware: Plated brass

Mount & Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Hardware

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: G16.5 globe bulb
candelabra base 40W max
220-240V: E14 base golf ball
40W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

40 watts max

Weight

5 lb (2.3 kg)

Remarks

UL listed.
Hardwired is standard.
Custom cord & plug available;
length approx 6'.
Custom switch available on
wall mount.
Indoor use and dry locations only.
Shade shape may vary slightly.



Dimensions

8" D x 4.5" H x 8" W
(20 D x 11 H x 20 cm W)
Wall mount diameter: 5" (13 cm)
Shade (approx.): 3.5" H x 9" W x 6" D
(9 H x 23 x 15 cm D)



Lapa Pendant

No. 436

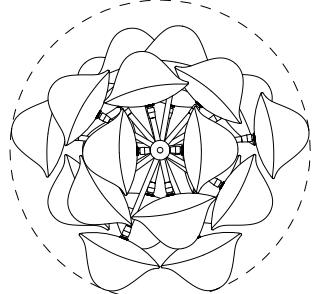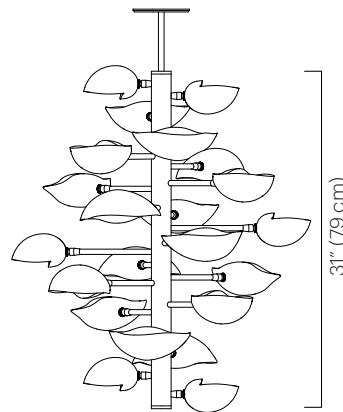

436 Lapa Pendant + Custom Frame
White Satin + Brushed Brass

TECHNICAL SPECIFICATIONS

Description

The Lapa is a balanced fixture comprised of 22 shell shades. Each shade is hand-formed in our Brooklyn studio, and can rotate 320° to cast light directionally.

Materials

Frame: Plated steel
Shades: Powder coated aluminum
Drop: Plated steel

Shade Color

- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- Black Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Frame Color

- Brushed Brass
- Polished Nickel
- Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: (22)G16.5 globe bulb
candelabra base 15W max
220-240V: (22)E14 base golf ball
15W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

330W max

Weight

25 lbs (11.5 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Ceiling mount consistent with shade color.
Arm lengths not adjustable.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

26.5" Dia x 31" H
(67 Dia x 79 cm H)
Minimum overall height: 34"
(86cm)
Shell Shade (approx.):
3.5" H x 9" W x 6" D
(9 H x 23 W x 15 cm D)



Whiplash Collection

Taking its name from the sinuous lines which came to define the art nouveau era, the Whiplash Collection repurposes this ornamental flourish as a functional form with signature minimalism and ease.



Whiplash Table Lamp

No. 122

TECHNICAL SPECIFICATIONS



Description
 The Whiplash Desk Lamp features a cylindrical cement cast base. The hand formed brass arm is secured by a brass dowel. The fixture has a single glass Whiplash shade, each shade is hand blown and illuminated by a dimmable LED. Shade can be faced up or down, specify shade orientation.

Materials
 Shade: Glass
 Base: Cement
 Frame: Plated brass
 Hardware: Plated and polished brass

Shade Color
 ● Black Ombre
Base Color
 ● Cement
Finish
 ● Oil Rubbed Bronze
 Custom finishes available.

Lamping
 LED: Warm white 2700K
 Lumens: 700 (equivalent to one 60W incandescent bulb)
 CRI: 90+
 70,000 LED life hours (approx.)

Voltage / Wattage
 24V / 7W
Weight
 11 lbs (5 kg)

Remarks
 Shade does not rotate after install.
 Specify shade orientation.
 Cord color is black;
 length approx. 7 feet.
 Dimmer switch located on cord.
 Indoor use and dry locations only.

Dimensions
 Fixture dimensions:
 24.5"L x 7" W x 17.5"H
 (62 L x 18 W x 44 cm H)
 Shade: 7" Ø x 6" H
 (18 Ø x 15 cm H)




460 Whiplash Pendant
White Ombre + Oil Rubbed Bronze

Whiplash Pendant

No. 460

TECHNICAL SPECIFICATIONS

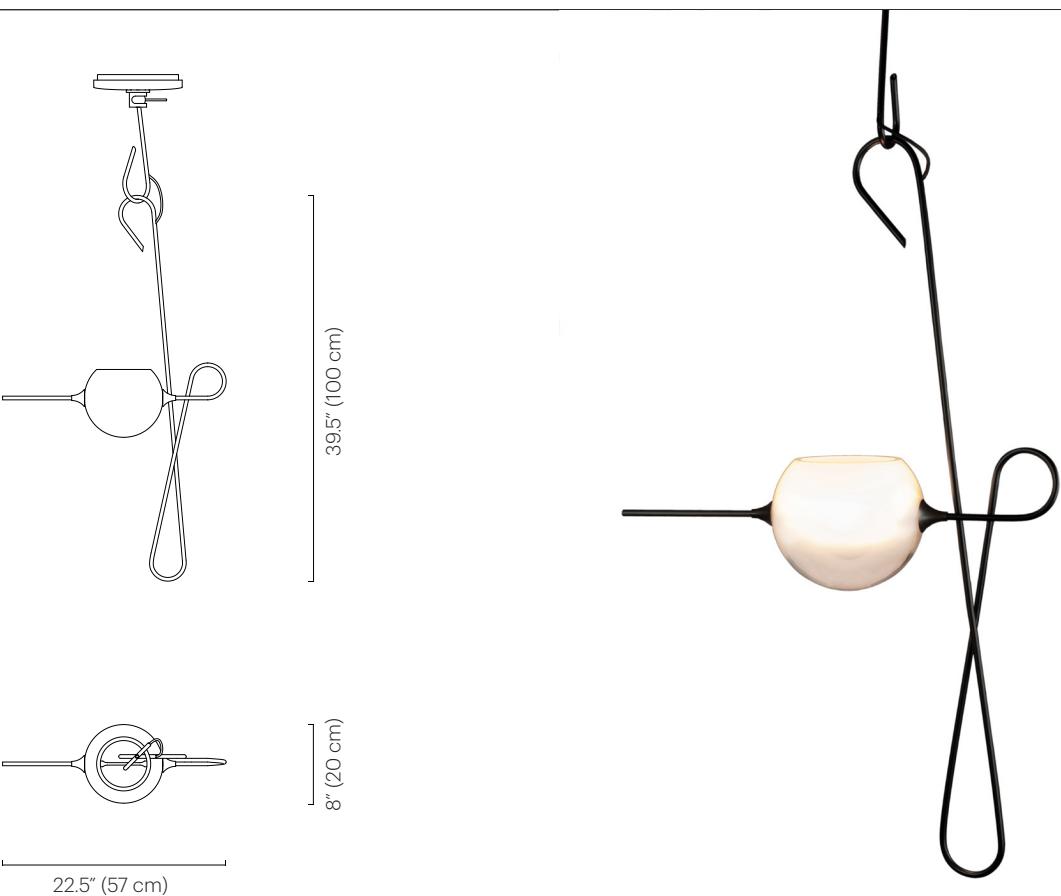

Description

The Whiplash Pendant is a balanced fixture on an asymmetrical axis, which allows gentle movement. The fixture has one glass Whiplash shade, each shade is hand blown and illuminated by a dimmable LED. The fixture can rotate 245° from the canopy.

Materials

Shade: Glass
Ceiling mount: Powder coated aluminum and steel.
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Custom colors available.

Finish

Brushed Brass
Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 700 (equivalent to one 60W incandescent bulb)
CRI: 90+
70,000 LED life hours (approx.)

Shade Color

White Ombre
Black Ombre

Ceiling Mount Color

Black Satin
White Satin

Custom colors available.

Power Supply

10W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: dimmable Class 2 included in canopy.

0-10V, TRIAC, ELV dimmable
For 220-240V areas: 0-10V, ELV (only at 230V) dimmable

24V / 7W
Voltage / Wattage

8 lbs (3.5 kg)
Weight

Each fixture is handmade and therefore may vary up to 2" in overall height due to the counterbalancing nature.
Dimensions

Specify drop length.
Arm and frame lengths are fixed.
Fixed drop not adjustable on site.
Shade does not rotate.
Specify shade orientation.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.

Hardware finish consistent with frame finish.
Specify ceiling mount color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.


Fixture dimensions:
22.5" L x 8" W x 39.5" H
(57 L x 20 W x 100 cm H)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Minimum overall height: 49.5" (126 cm)
Shade: 8" Ø x 7" H
(20 Ø x 18 cm H)

Whiplash Tiered Pendant, 2 Tier

TECHNICAL SPECIFICATIONS



No. 461

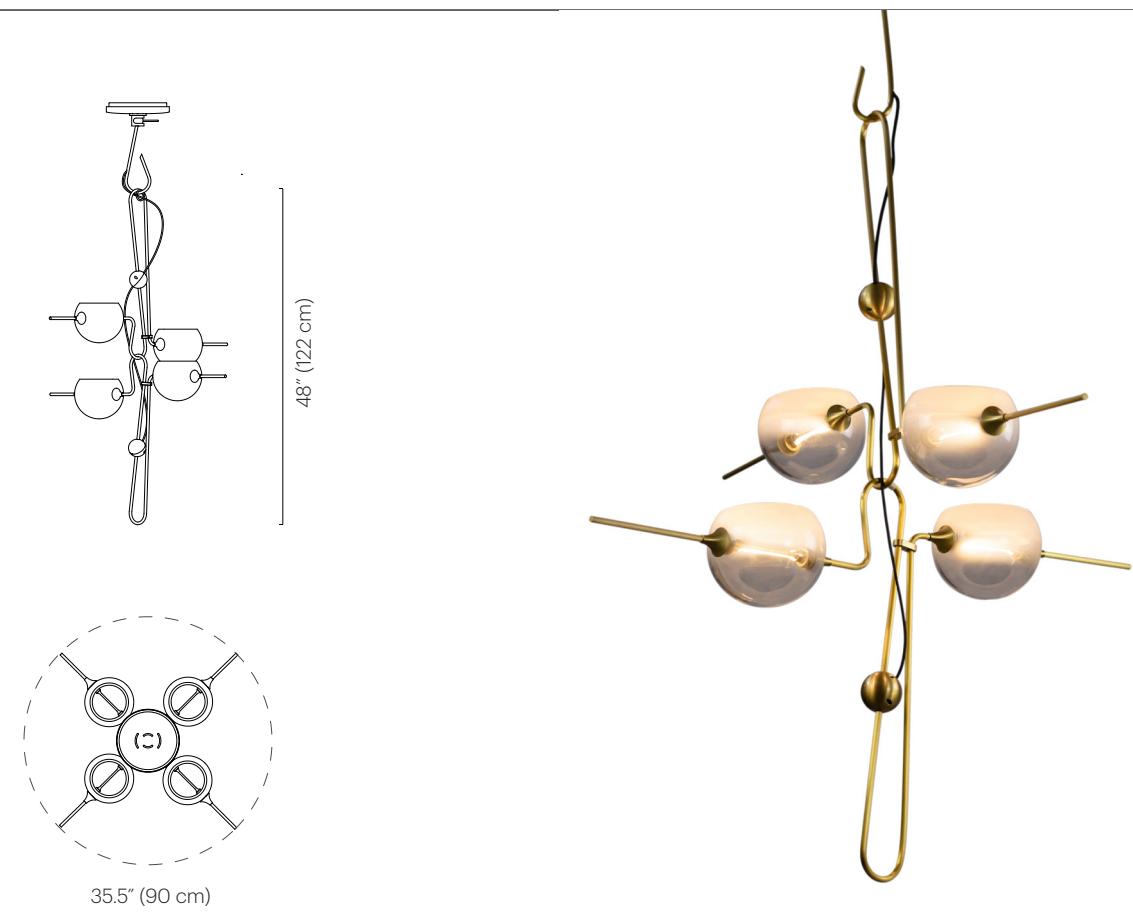

Description

The Whiplash Tiered Pendant is a balanced fixture comprised of asymmetrical curves. The fixture has four glass Whiplash shades, each shade is hand blown and illuminated by a dimmable LED. The fixture can rotate 245° from the canopy.

Materials

Shade: Glass
Ceiling mount: Powder coated aluminum and steel.
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Lamping

LED: Warm white 2700K
Lumens: 2800 (equivalent to four 60W incandescent bulb)
CRI: 90+
70,000 LED life hours (approx.)

Shade Color

- White Ombre
- Black Ombre

Ceiling Mount Color

- Black Satin
- White Satin

Custom colors available.

Finish

- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Power Supply

40W 24V
For 120V areas: dimmable Class 2 included in canopy.

For 220-240V areas: dimmable Class 2 included in canopy.

Dimmer Compatibility

For 120V areas: 0-10V, TRIAC & ELV dimmable
For 220-240V areas: 0-10V dimmable

Voltage / Wattage

24V / 28W

Weight

20 lbs (9 kg)

Remarks

Each fixture is handmade and therefore may vary up to 2" in overall height due to the counterbalancing nature.


Dimensions
Fixture diameter: 35.5" (90 cm)
Fixture height: 48" (122 cm)
Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H)
Minimum overall height: 58.5" (149 cm)
Shade: 7" Ø x 6" H (18 Ø x 15 cm H)



Whiplash Tiered Pendant, 3 Tier

No. 461

TECHNICAL SPECIFICATIONS

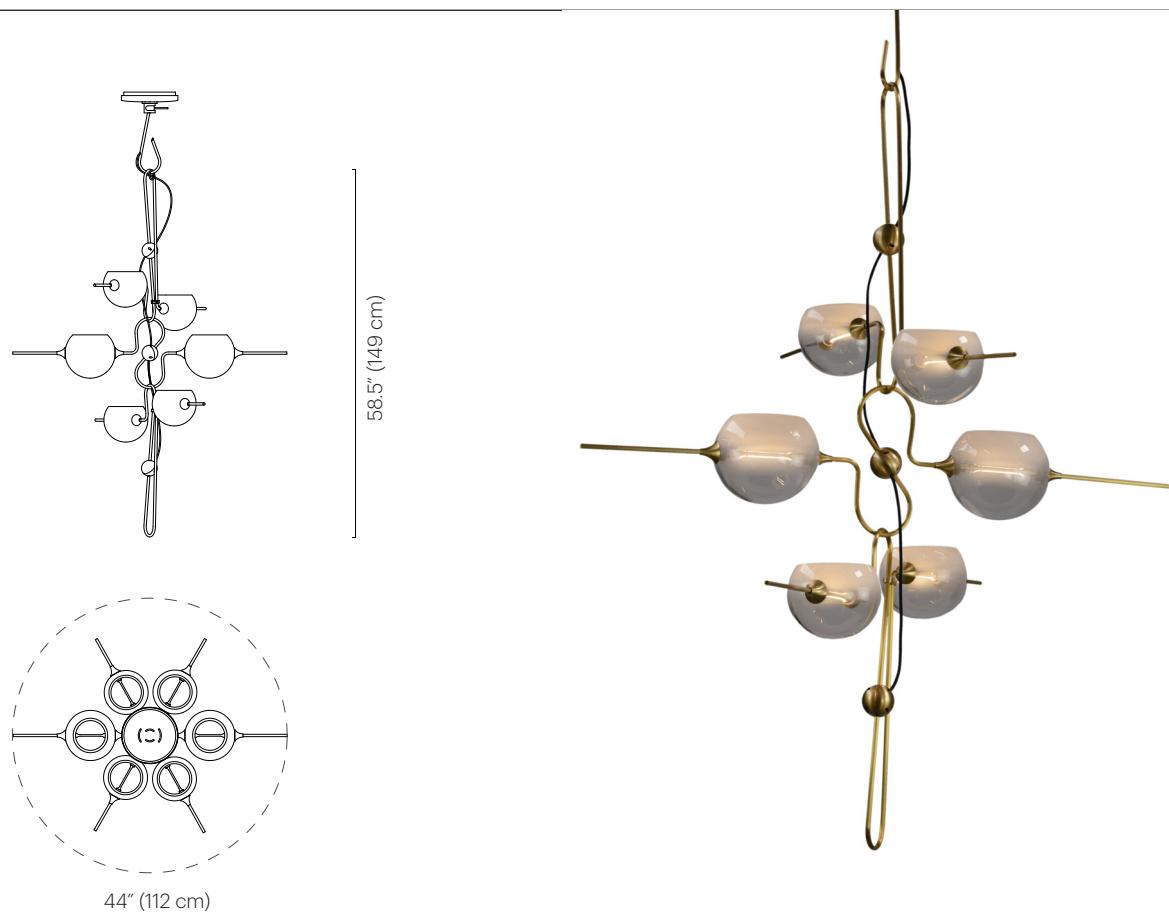

Description

The Whiplash Tiered Pendant is a balanced fixture comprised of asymmetrical curves. The fixture has six glass Whiplash shades, each shade is hand blown and illuminated by a dimmable LED. The fixture can rotate 245° from the canopy.

Materials

Shade: Glass
 Ceiling mount: Powder coated aluminum and steel.
 Frame: Plated brass
 Drop: Plated brass
 Hardware: Plated and polished brass

Finish

Brushed Brass
 Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K
 Lumens: 4200 (equivalent to six 60W incandescent bulb)
 CRI: 90+
 70,000 LED life hours (approx.)

Shade Color

White Ombre
 Black Ombre

Ceiling Mount Color

Black Satin
 White Satin

Custom colors available.

Power Supply

40W 24V
 For 120V areas: dimmable Class 2 included in canopy.
 For 220-240V dimmable Class 2 included in canopy.

Dimmer Compatibility

For 120V areas: 0-10V, TRIAC & ELV dimmable
 For 220-240V areas: 0-10V dimmable

Voltage / Wattage

24V / 39W

Weight

30 lbs (13.5 kg)

Remarks

Each fixture is handmade and therefore may vary up to 2" in overall height due to the counterbalancing nature.
 Specify drop length.
 Arm and frame lengths are fixed.
 Fixed drop not adjustable on site.
 Shade does not rotate.

Remarks Continued

Specify shade orientation.
 Not for use on sloped ceilings.
 Black exterior electrical cord is standard.

Hardware finish consistent with frame finish.

Specify ceiling mount color.
 Additional weight support recommended for junction box installation.
 Indoor use and dry locations only.
 Five tier maximum.



Dimensions

Fixture diameter: 44" (112 cm)
 Fixture height: 58.5" (149 cm)
 Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H)
 Minimum overall height: 69" (175 cm)
 Small Shade: 7" Ø x 6" H (18 Ø x 15 cm H)
 Large Shade: 8" Ø x 7" H (20 Ø x 18 cm H)

Whiplash Chain Pendant

TECHNICAL SPECIFICATIONS

No. 462

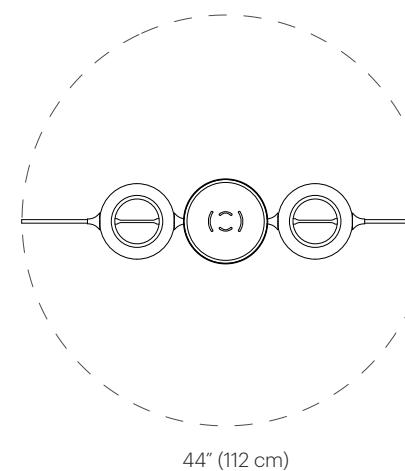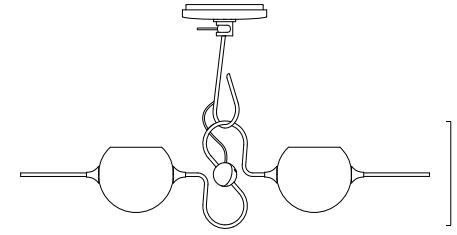

Description
The Whiplash Chain Pendant is a balanced fixture on an asymmetrical axis, which allows gentle movement. The fixture has two glass Whiplash shades, each shade is hand blown and illuminated by a dimmable LED. The fixture can rotate 245° from the canopy.

Materials
Shade: Glass
Ceiling mount: Powder coated aluminum and steel.
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Shade Color
○ White Ombre
● Black Ombre
Ceiling Mount Color
● Black Satin
○ White Satin
Custom colors available.

Finish
● Brushed Brass
● Oil Rubbed Bronze
Custom finishes available.

Lamping
LED: Warm white 2700K
Lumens: 1400 (equivalent to two 60W incandescent bulb)
CRI: 90+
70,000 LED life hours (approx.)

Power Supply
20W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: dimmable Class 2 included in canopy.

Dimmer Compatibility
For 120V areas: 0-10V, TRIAC & ELV dimmable
For 220-240V areas: 0-10V, EVL (only at 230V) dimmable

Voltage / Wattage
24V /14W

Weight
10 lbs (4.5 kg)

Remarks
Each fixture is handmade and therefore may vary up to 2" in overall height due to the counterbalancing nature.



Remarks Continued
Specify drop length.
Arm and frame lengths are fixed.
Fixed drop not adjustable on site.
Shade does not rotate.
Specify shade orientation.
Specify number of tiers.
Five tier maximum.
Each tier has two shades.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.
Hardware finish consistent with frame finish.
Specify ceiling mount color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions
Fixture diameter: 44" (112 cm)
Fixture height: 11.5" (29 cm)
Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H)
Minimum overall height: 24" (61 cm)
Shade: 8" Ø x 7" H (20 Ø x 18 cm H)

Whiplash Chain Pendant, 3 Tier

TECHNICAL SPECIFICATIONS

No. 462

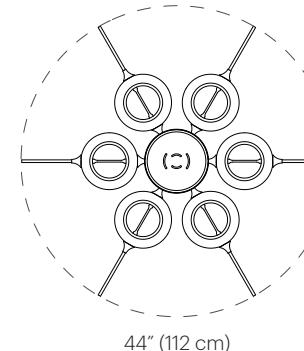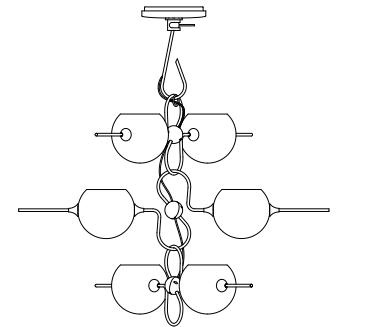

Description

The Whiplash Chain Pendant is a balanced fixture comprised of linked curves. The fixture has six glass Whiplash shades, each shade is hand blown and illuminated by a dimmable LED. The fixture can rotate 245° from the canopy. The quantity of the tiers can be specified.

Materials

Shade: Glass
Ceiling mount: Powder coated aluminum and steel.
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Finish

Brushed Brass
Oil Rubbed Bronze
Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 4200 (equivalent to six 60W incandescent bulb)
CRI: 90+
70,000 LED life hours (approx.)

Shade Color

White Ombre
Black Ombre

Ceiling Mount Color

Black Satin
White Satin

Custom colors available.

Power Supply

40W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: dimmable Class 2 included in canopy.

Dimmer Compatibility

For 120V areas: 0-10V, TRIAC & ELV dimmable
For 220-240V areas: 0-10V dimmable

Voltage / Wattage

24V / 39W

Weight

30 lbs (13.5 kg)

Remarks

Each fixture is handmade and therefore may vary up to 2" in overall height due to the counterbalancing nature.
Specify drop length.
Arm and frame lengths are fixed.
Fixed drop not adjustable on site.

Remarks Continued


Shade does not rotate.
Specify shade orientation.
Specify number of tiers.
Five tier maximum.
Each tier has two shades.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.
Hardware finish consistent with frame finish.
Specify ceiling mount color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

Fixture diameter: 44" (112 cm)
Fixture height: 32.5" (83 cm)
Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H)
Minimum overall height:
Three Tier: 43" (109 cm)
Two Tier: 34" (86 cm)
Single Tier: 24" (61 cm)
Shade: 8" Ø x 7" H (20 Ø x 18 cm H)

ARCHER Collection

The culmination of a fifteen-year exploration into tension, form, and material. Drawing from the poetry of traditional ironwork, the collection channels industrial cues into twisted, turned, and disciplined resolved forms, with each element bent and bowed with intention.

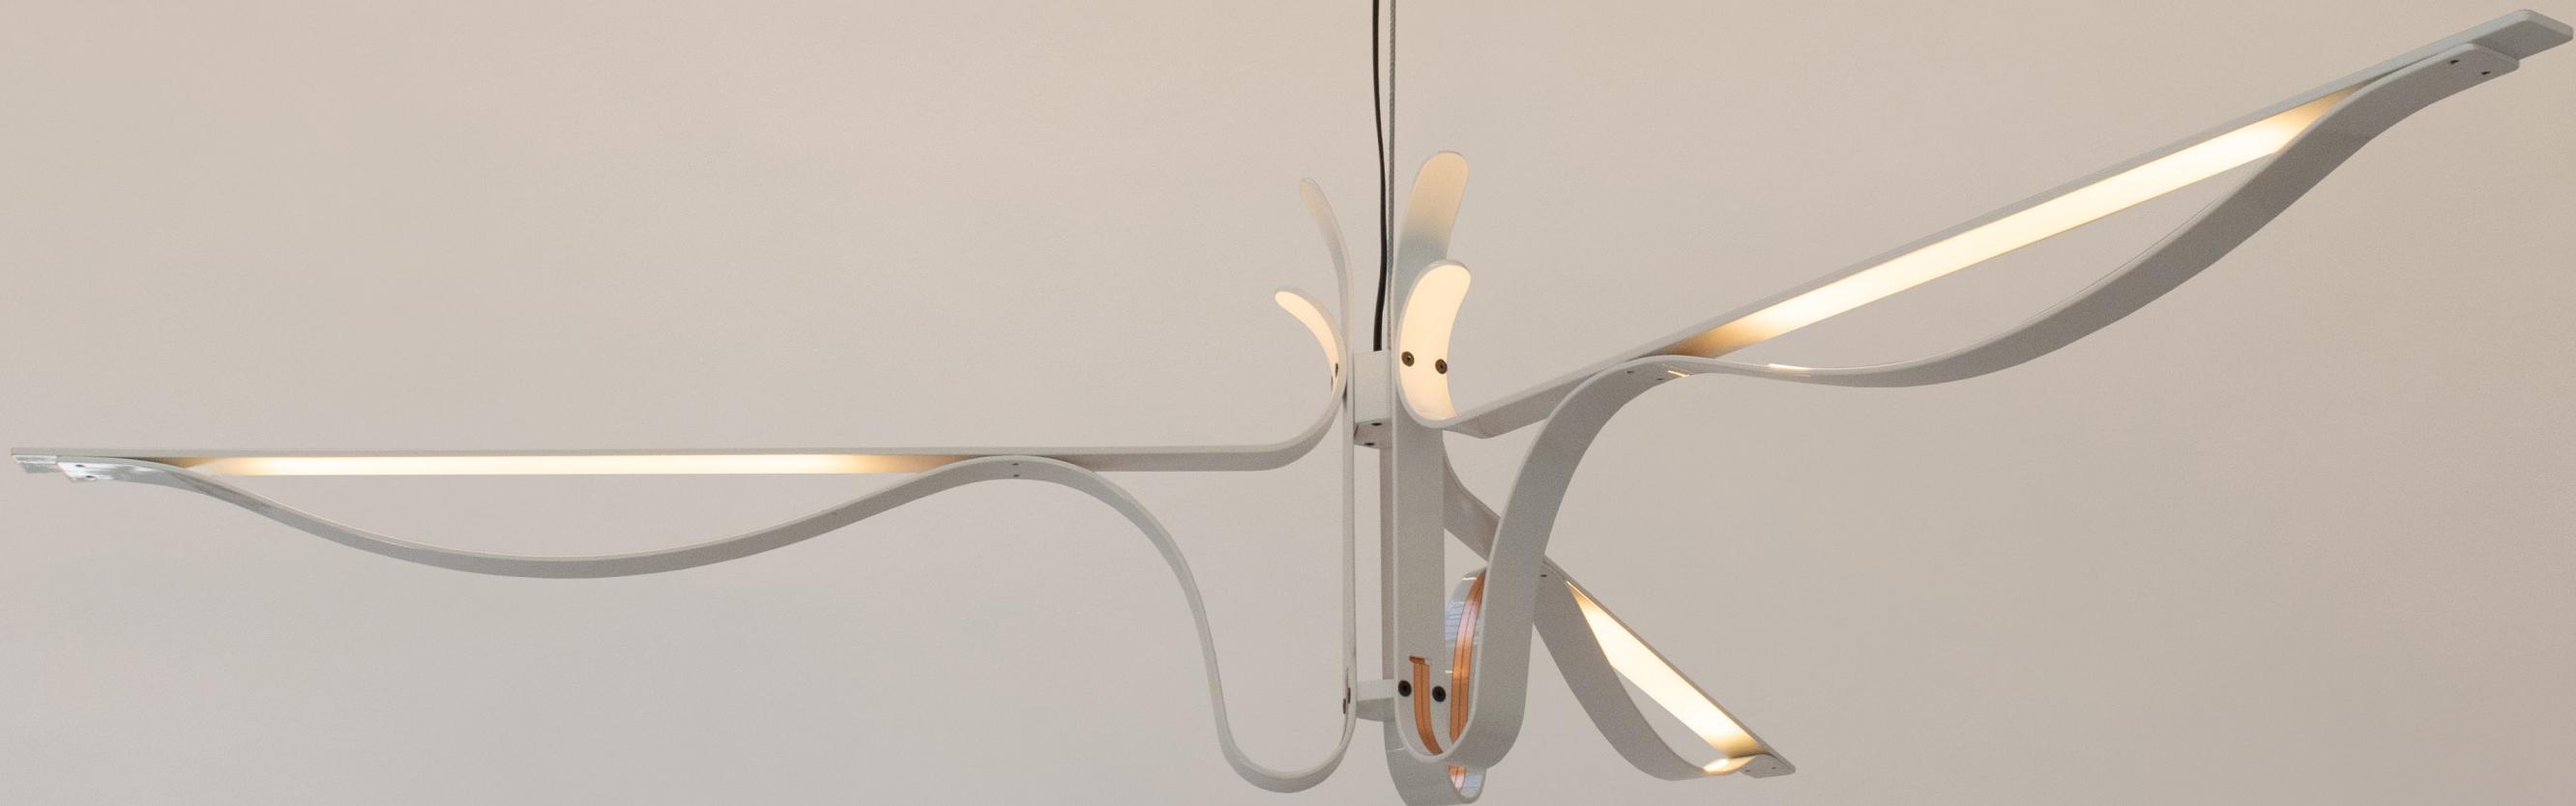



ARCHER Sconce

No. 225

TECHNICAL SPECIFICATIONS



Description

The ARCHER Sconce features a bowing arm anchored to a solid wall mount. The arm transitions to a shade and is illuminated by a single, dimmable LED. The arm swings side to side from the wall mount.

Materials

Shade/Frame: Powder coated aluminum
Ceiling mount: Powder coated steel
Wall Mount: Aluminum
Hardware: Black-oxide steel

Mount, Frame & Shade Color

- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- White Gloss (white gloss interior)

Custom colors available.

Lamping

LED: Warm white 2700K
CRI: 90+
70,000 LED life hours (approx.)

Weight

5 lbs (2.3 kg)

Remarks

Standard arm length as listed.
Wall mount color matches specified shade/frame.
Black electrical cord is standard.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions



58" L x 2.5" W x 15.5" H
(147 L x 6 W x 39 cm H)
Wallmount: 2.5" W x 12" H
(6 W x 30.5 cm H)



ARCHER Pendant Small

No. 470

TECHNICAL SPECIFICATIONS

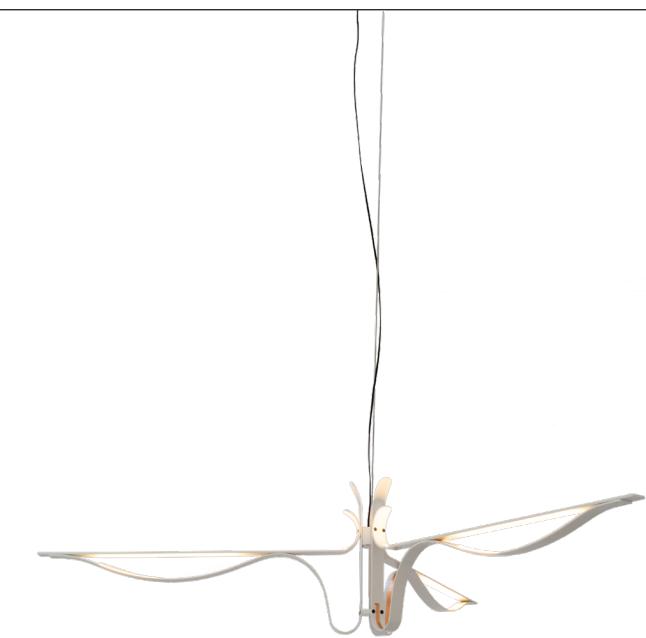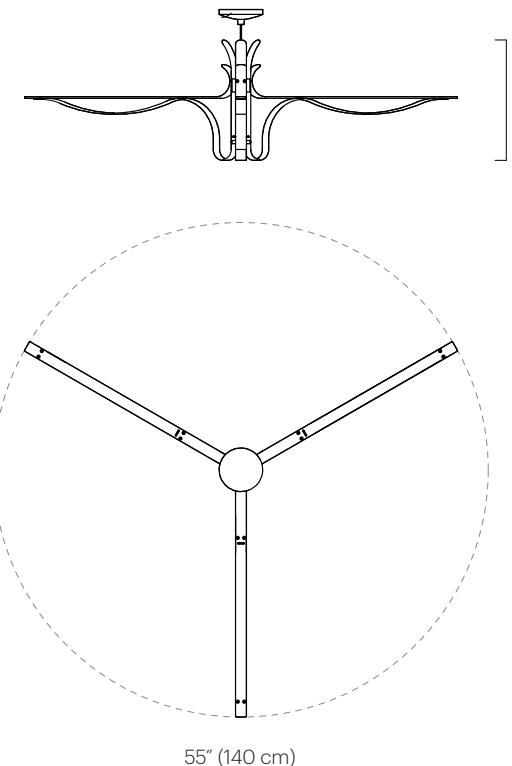

Description

The ARCHER Pendant is a balanced fixture comprised of bowing curves. The fixture has three arms that transition to shades and are illuminated by a dimmable LED.

Materials

Shade/Frame: Powder coated aluminum
 Ceiling mount: Powder coated steel
 Drop: Stainless steel cable
 Hardware: Black-oxide steel

Mount, Frame & Shade Color

- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- White Gloss (white gloss interior)

Custom colors available.

Lamping

LED: Warm white 2700K
 CRI: 90+
 70,000 LED life hours (approx.)

Weight

5 lbs (2.3 kg)

Remarks

Specify drop length.
 Approx. 6" of extra cable and cord included.
 Only available in two sizes, no custom diameters.
 Ceiling mount color matches specified shade/frame.
 Black electrical cord is standard.
 Additional weight support recommended for junction box installation.
 Indoor use and dry locations only.

Dimensions


Fixture diameter: 55" (140 cm)
 Fixture height: 14" (35.5 cm)
 Canopy mount: 6.5" Ø x 1.25" H
 (17 Ø x 3 cm H)
 Minimum overall height: 17" (43 cm)



ARCHER Pendant Large

TECHNICAL SPECIFICATIONS

No. 470

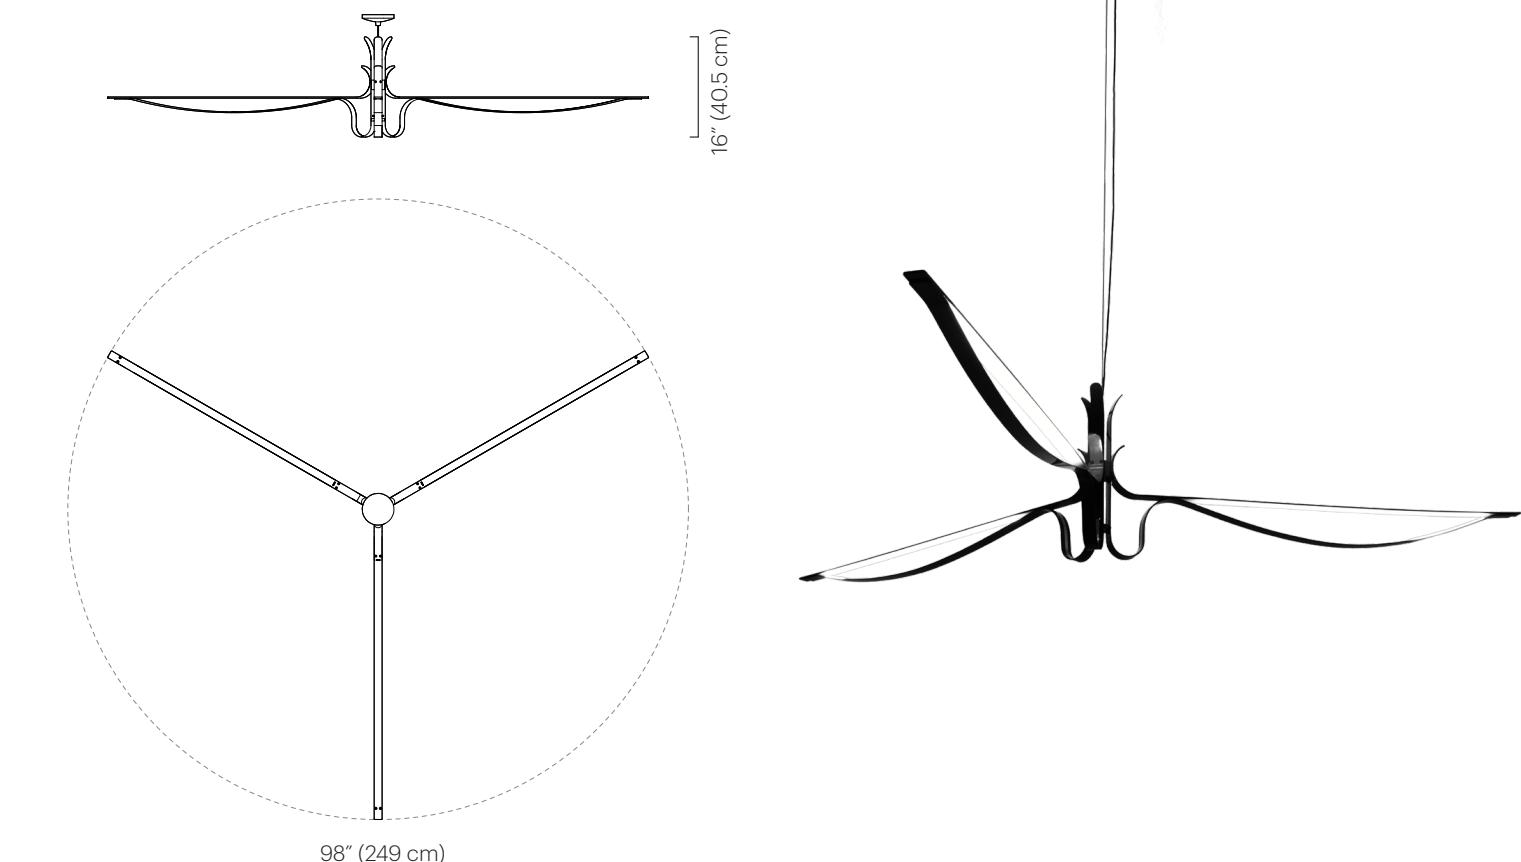

Description

The ARCHER Pendant is a balanced fixture comprised of bowing curves. The fixture has three arms that transition to shades and are illuminated by a dimmable LED.

Materials

Shade/Frame: Powder coated aluminum
Ceiling mount: Powder coated steel
Drop: Stainless steel cable
Hardware: Black-oxide steel

Mount, Frame & Shade Color

- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- White Gloss (white gloss interior)

Custom colors available.

Lamping

LED: Warm white 2700K
Lumens: 7000 (equivalent to ten 70,000 LED life hours (approx.))

Weight

5 lbs (2.3 kg)

Remarks

Specify drop length.
Approx. 6" of extra cable and cord included.
Only available in two sizes, no custom diameters.
Ceiling mount color matches specified shade/frame.
Black electrical cord is standard.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

Fixture diameter: 98" (249 cm)
Fixture height: 16" (40.5 cm)
Canopy mount: 6.5" Ø x 1.25" H
(17 Ø x 3 cm H)
Minimum overall height: 19" (48 cm)

David Weeks Studio works alongside architects, interior designers, and private clients to construct experience and define space with singular expression.

Our made-to-order production process allows us to offer customizations on much of our lighting collections. Our team will be happy to guide you through the process and estimate any project, whether you're looking for made-to-measure dimensions or a custom color statement. The studio offers a full custom design service that extends beyond the scope of our existing collections. Please contact our sales department for more details.

Call us at (212) 966 3433

Email us at sales@davidweeksstudio.com

Follow us @davidweeksstudio

Find out more at www.davidweeksstudio.com