




**David
Weeks
Studio**



Handmade in New York since 1996.

David Weeks Studio is a design studio based in Brooklyn NY. Founded by designer David Weeks in 1996, the studio is renowned for its large-scale sculptural lighting. We are committed to the act of making, much of the work is made by hand by our talented team of designers, engineers, and artisans. The process marries an artist's sensibility with technical precision. Each fixture is unique and designed to last for generations. We design and produce lighting and products that are highly regarded and sought after by our clients, designers, and architects around the world.

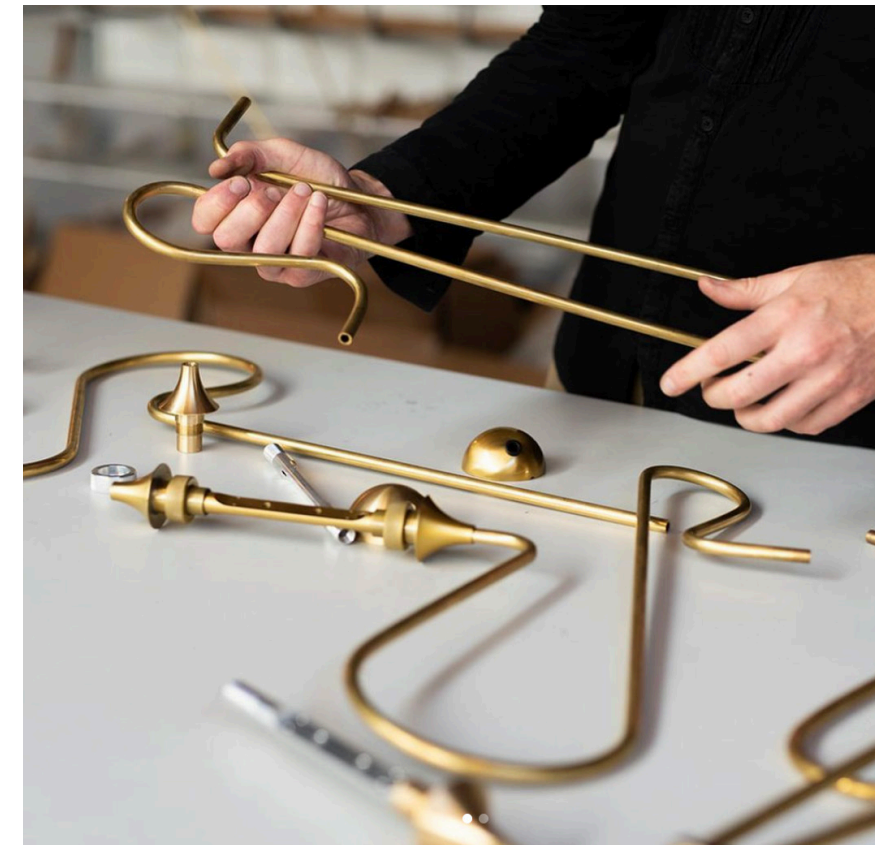



Widely regarded as the founding father of North American lighting design, David Weeks has been a pioneering figure in Brooklyn's burgeoning independent design movement since his studio's early roots in Dumbo. His genre-defining work is the result of a distinctly hands-on, sculptural process that explores scale and proportion, balance, and movement.






Precision design, made to measure.

David Weeks Studio works alongside architects, interior designers, and private clients to construct experience and define spaces. Our made-to-order production process allows us to offer customizations on much of our lighting collections. Whether you're looking for unique dimensions or a custom color statement, our team will be happy to guide you through the process and estimate any project. The studio offers a full custom design service that extends beyond the scope of our existing collections.

Meet with our team to learn more about our custom capabilities.



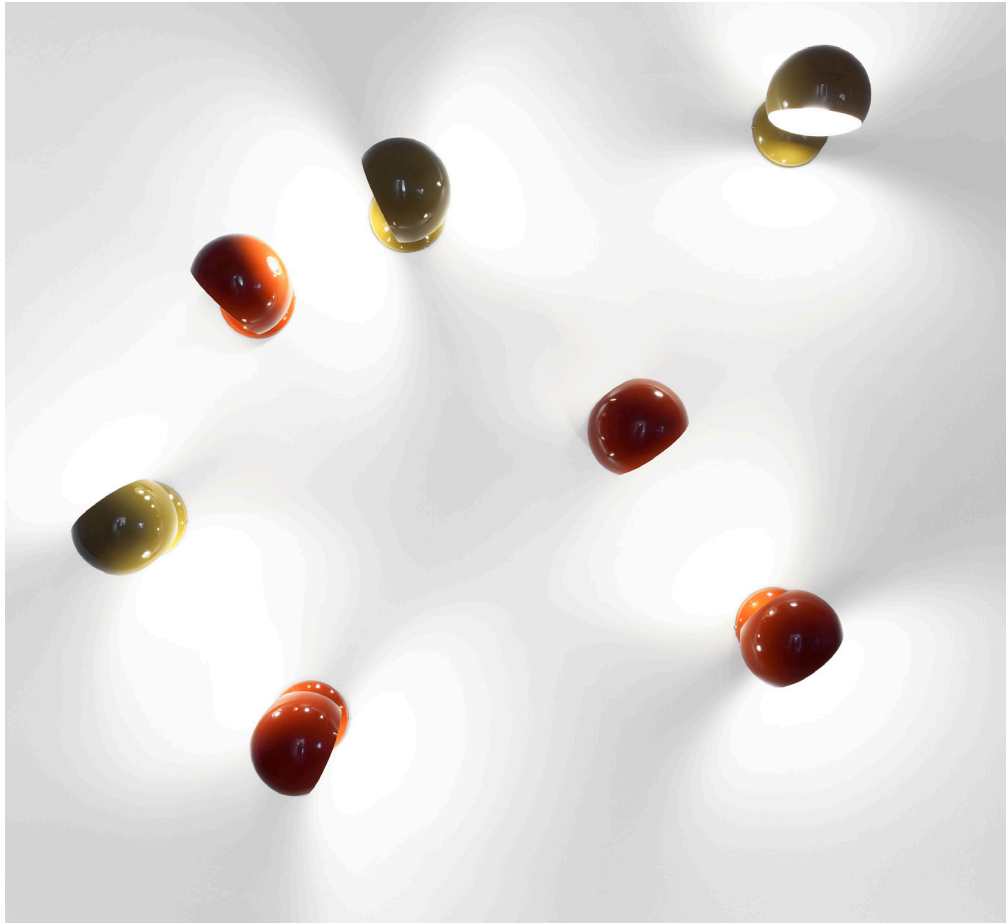

Made slow, shipped quick.

DWS Quickship program offers our best-loved designs, ready to ship and delivered within 2-3 weeks. Quick Ship items are handmade in Brooklyn with the same care as our made-to-order items but feature fixed dimensions in our most requested colors and finishes.



Collections

- Boi
- Boi Cluster
- Hennen
- OTTO
- Treble
- Sarus
- Torroja
- Bottle + Bullet
- Shell
- Whiplash

Boi Collection

Boi brightens up serious design with an iconic form that gives an ebullient nod to 1960's pop design. Great in pairs and even better in multiples, it spills light from curved shapes, and casts patterns onto surrounding walls.





209 Boi Sconce
Orange Gloss + Polished Nickel


Boi Sconce

TECHNICAL SPECIFICATIONS

No. 209



Select finishes and colors available.

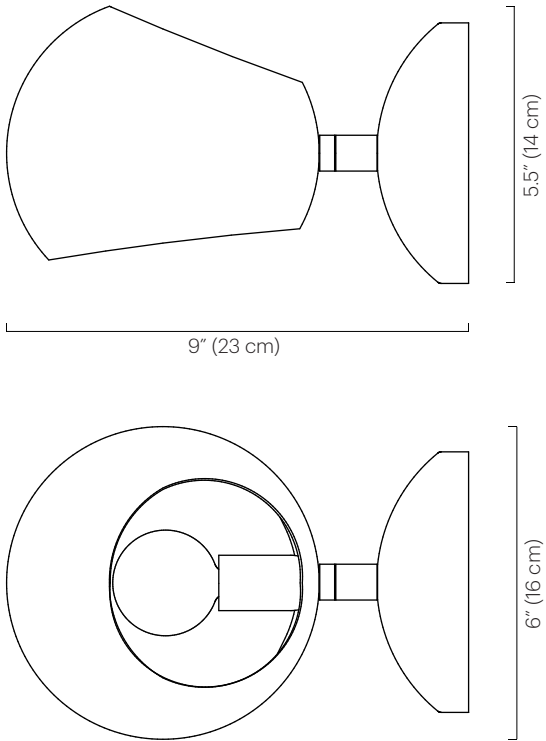

Description

Featuring a small Boi shade with openings at both the top and the bottom, the Boi Sconce allows light to flow through the entirety of the fixture. The shade rotates 320° to cast light directionally.

Materials

Shade: Powder coated steel
Wall mount: Powder coated steel
Hardware: Plated brass

Mount & Shade Color

- Black Gloss (black gloss interior)
- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- Orange Gloss (ivory satin interior)
- White Gloss (white gloss interior)
- White Satin (white satin interior)

Custom colors available.

Hardware

- Polished Nickel
- Brushed Brass

Custom finishes available.

Lamping

120V: G16.5 globe bulb
candelabra base 60W max
220-240V: E14 base golf ball
60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

60 watts max

Weight


5lb (2.3 kg)

Remarks

UL listed.
Hardwired is standard.
Custom cord & plug available;
length approx 6'.
Custom switch available on
wall mount.
Indoor use and dry locations only.

Dimensions

9" D x 6" W x 5" H
(23 D x 16 W x 13 cm H)
Wall mount diameter: 5" (13 cm)
Shade: 6" Ø x 5.5" H
(15 Ø x 14 cm H)

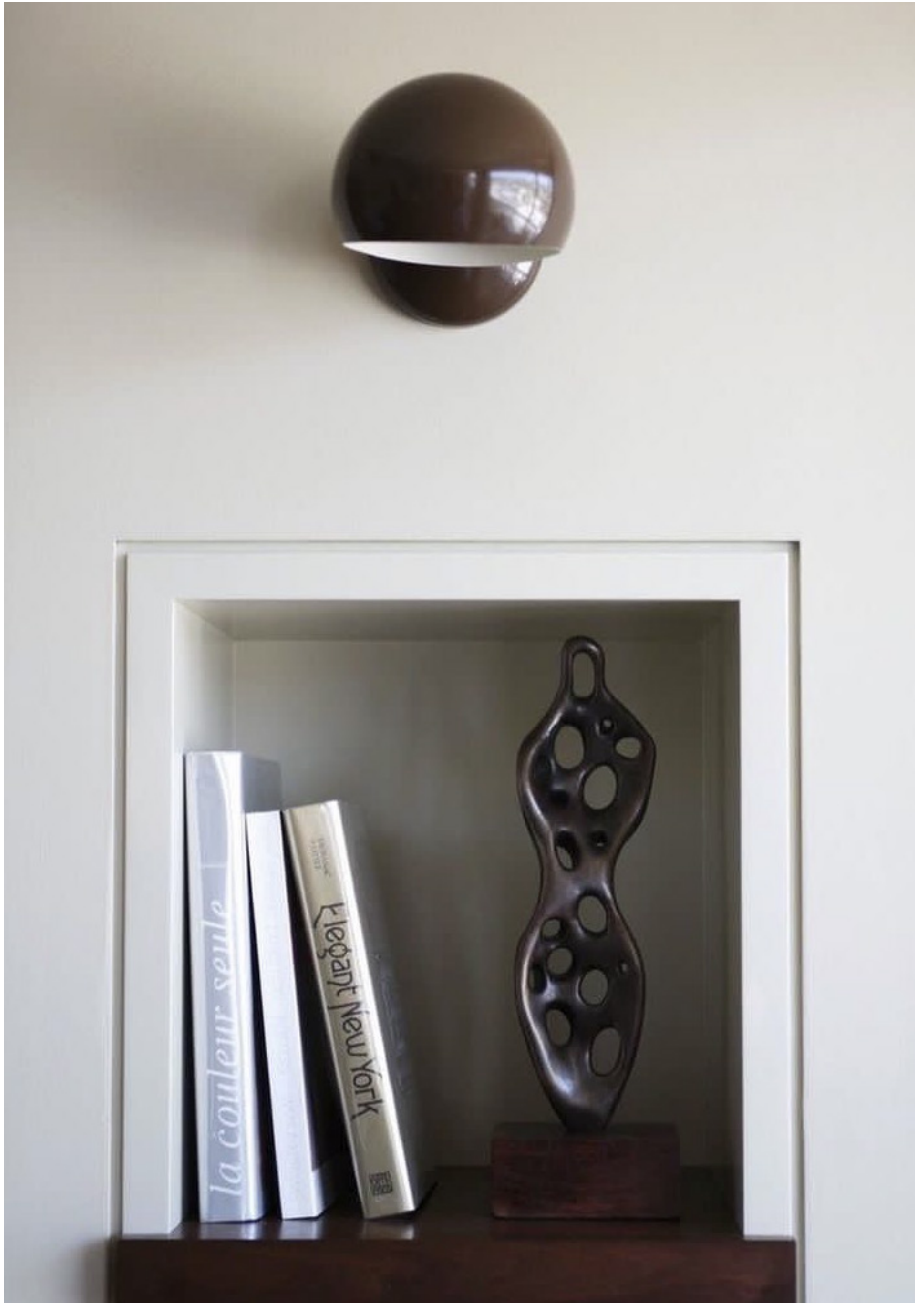

209 Boi Sconce
Custom Brown Gloss


Big Boi Sconce

TECHNICAL SPECIFICATIONS

No. 214



Select finishes and colors available.

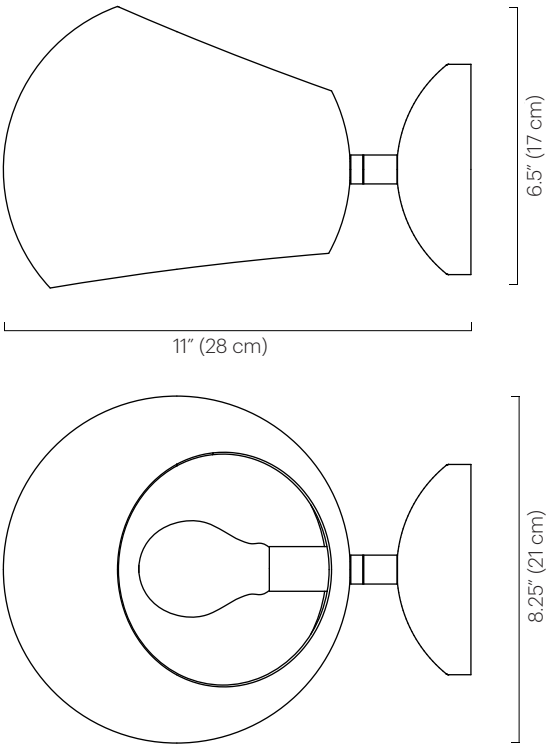

Description

Featuring a large Boi shade with openings at both the top and the bottom, the Big Boi Sconce allows light to flow through the entirety of the fixture. The shade rotates 320° to cast light directionally.

Materials

Shade: Powder coated steel
Wall mount: Powder coated steel
Hardware: Plated brass

Mount & Shade Color

- Black Gloss (black gloss interior)
- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- Orange Gloss (ivory satin interior)
- White Gloss (white gloss interior)
- White Satin (white satin interior)

Custom colors available.

Hardware

- Polished Nickel
- Brushed Brass

Custom finishes available.

Lamping

120V: A19 or A15
medium base 60W max
220-240V: E27 base 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

60 watts max

Weight

5 lbs (2.3 kg)

Remarks

UL listed.
Hardwired is standard.
Custom cord & plug available;
length approx 6'.
Custom switch available
on wall mount.
Indoor use and dry locations only.

Dimensions

11" D x 8.25" W x 6.5" H
(28 D x 21 W x 17 cm H)
Wall mount diameter: 5" (13 cm)
Shade: 8.25" Ø x 6.5" H
(21 Ø x 17 cm H)




121 Fenta Table + 317 Fenta Standing Lamp
Black Satin + Brushed Brass

Fenta Table Lamp

TECHNICAL SPECIFICATIONS

No. 121

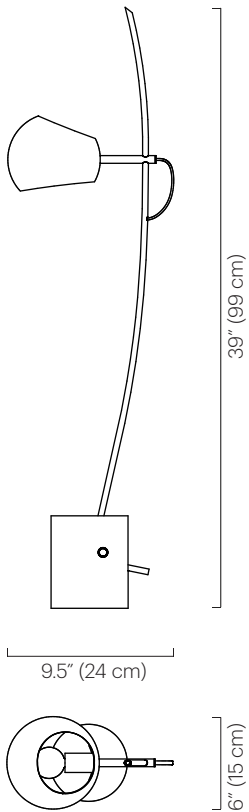

<p>Description</p> <p>The Fenta Desk Lamp features a cylindrical cement cast base. The hand formed brass arm is secured by a wooden dowel. The Boi shade has two openings casting light both up and down.</p>	<p>Shade Color</p> <ul style="list-style-type: none">● Black Satin (ivory satin interior)● Grey Gloss (grey gloss interior)● Ivory Satin (ivory satin interior)● White Satin (white satin interior) <p>Custom colors available.</p>	<p>Lamping</p> <p>120V: G16.5 globe bulb candelabra base 60W max 220-240V: E14 base golf ball 60W max Note: Bulbs not included. Halogen bulbs not recommended.</p>	<p>Remarks</p> <p>UL listed. On/Off switch located on cord. Cord color is black; length approx. 7 feet. Fixed shade does not swivel. Indoor use and dry locations only.</p>
<p>Materials</p> <p>Shade: Powder coated steel Frame: Plated brass Base: Cement Dowel: Hardwood</p>	<p>Base Color</p> <ul style="list-style-type: none">● Natural Cement● Darkened Cement <p>Finish</p> <ul style="list-style-type: none">● Brushed Brass● Polished Nickel <p>Custom finishes available.</p>	<p>Wattage</p> <p>60 watts max</p> <p>Weight</p> <p>10 lbs (4.5 kg)</p>	<p>Dimensions</p> <p>9.5" D x 6" W x 39" H (24 D x 15 W x 99 cm H) Base: 5" Ø x 6" H (13 Ø x 15 cm H) Shade: 6" Ø x 5.5" H (15 Ø x 14 cm H)</p>



Fenta Standing Lamp

TECHNICAL SPECIFICATIONS

No. 317



Description

The Fenta lamp features a cylindrical cement cast base. The hand formed brass arm is secured by a wooden dowel. The Boi shade has two openings casting light both up and down.

Materials

Shade: Powder coated steel
Frame: Finished brass
Base: Cement
Dowel: Hardwood

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Base Color

- Natural Cement
- Darkened Cement

Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

Lamping

120V: G16.5 globe bulb
candelabra base 60W max
220-240V: E14 base golf ball
60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

60 watts max

Weight

20 lbs (9 kg)

Remarks

UL listed.
Dimmer switch located on cord.
Cord color is black;
length approx. 10 feet.
Fixed shade does not swivel.
Indoor use and dry locations only.

Dimensions

13" D x 7.5" W x 70" H
(33 D x 19 W x 178 cm H)
Base: 6"Ø x 9" H
(15 Ø x 23 cm H)
Shade: 7.5" Ø x 6" H
(19 Ø x 15 cm H)




418 Custom Boi Tiered Pendant 4 Tier
White Satin + Polished Nickel

Boi Tiered Pendant

TECHNICAL SPECIFICATIONS

No. 418

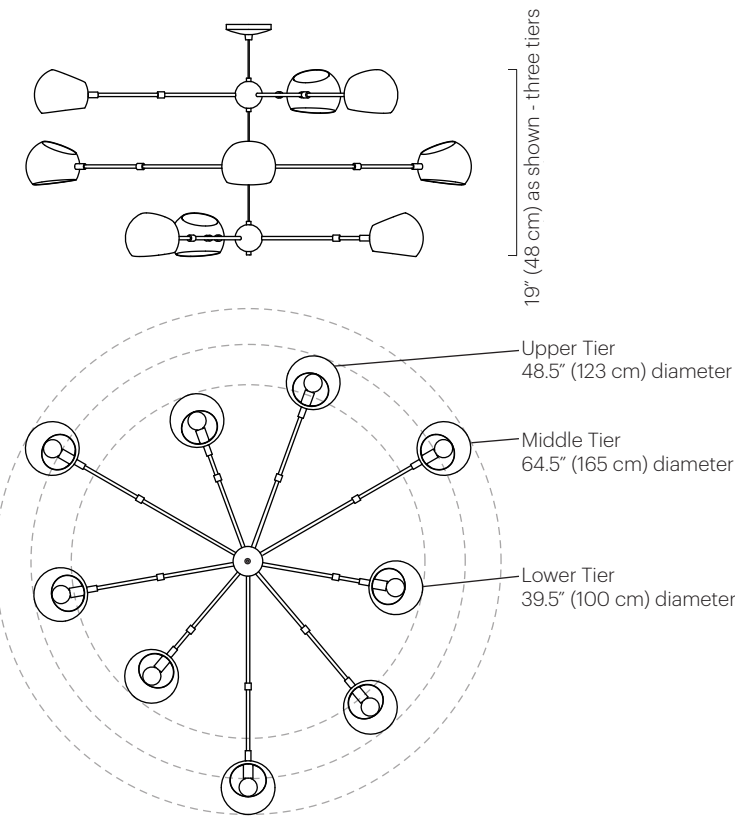

Shown above with three tiers

Description

The Boi Tiered Pendant is a highly customizable fixture, offering an expanding number of tiers with varying dimensions. Each tier has three arms made of plated steel and rotating Boi shades with openings at the top and bottom. Shades rotate 320° to cast light directionally.

Materials

Shades: Powder coated steel
Ceiling mount: Powder coated steel
Frame: Plated steel
Hubs: Plated brass
Drop: Stainless steel cable

Shade Color

- Black Gloss (black gloss interior)
- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- Orange Gloss (ivory satin interior)
- White Gloss (white gloss interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

Lamping (Three shades per tier)

120V: (3)G16.5 globe bulb
candelabra base 60W max
220-240V: (3)E14 base golf ball
60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

180 watts max per tier

Weight

Weight varies; depending on
number of tiers and dimensions.
3-tier fixture: approx. 15 lbs (7 kg)

Remarks

Specify drop length.
Approx. 6" of extra cable
and cord included.
Specify number of tiers.
Two tier minimum (six shades).
Each tier has three shades.
Tiers may be specified with
different diameters.

Remarks continued

Ceiling mount consistent
with shade color.
White electrical cord is standard.
Additional weight support
recommended for junction
box installation.
Indoor use and dry locations only.

Dimensions

Tiers are available in four
standard diameters:
39.5" / 48.5" / 56.5" / 64.5"
(100 cm / 123 cm / 144 cm / 164 cm)
or specify custom tier diameters.
Min. diameter of tier: 24" (61 cm)
Max. diameter of tier: 72" (183 cm)
Ceiling mount diameter: 5" (13 cm)
Standard distance
between tiers: 7" (18 cm)
Minimum overall height:
Two tiers: 13" (33 cm)
Three tiers: 20" (51 cm)
Shade: 6" Ø x 5.5" H
(15 Ø x 14 cm H)





419 Boi Oval Pendant
Black Satin + Polished Nickel

Boi Oval Pendant

TECHNICAL SPECIFICATIONS

No. 419

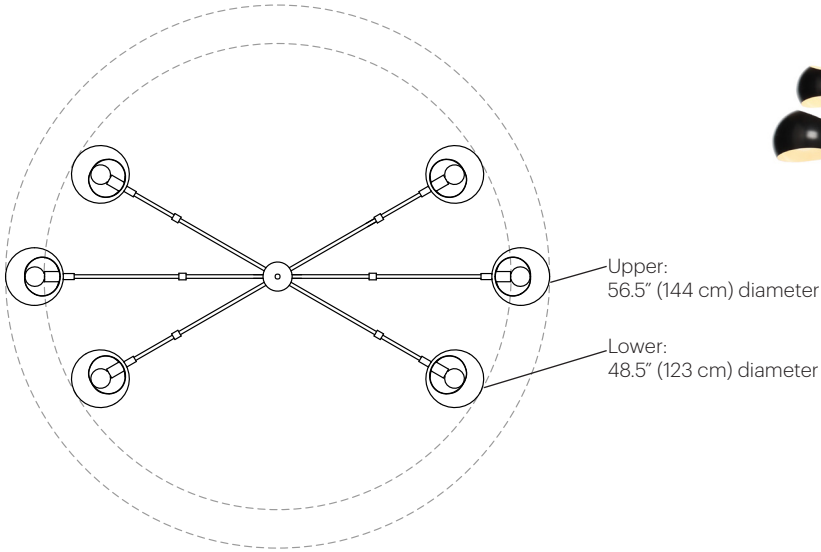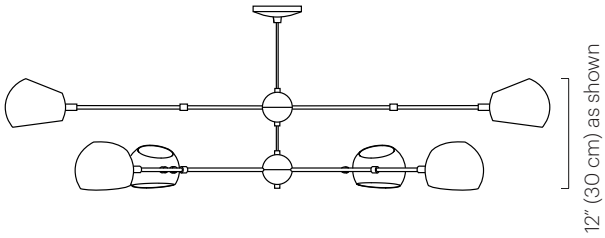

Description

The Boi Oval is a two tier fixture with six shades. The top tier has two shades, and the Bottom tier has four shades creating an oval shape when viewed from below. Shades rotate 320° to cast light directionally. Tiers are available in three diameters; they can also be customized to client specifications.

Materials

Shades: Powder coated steel
Ceiling mount: Powder coated steel
Frame: Plated steel
Hubs: Plated brass
Drop: Stainless steel cable

Shade Color

- Black Gloss (black gloss interior)
- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- Orange Gloss (ivory satin interior)
- White Gloss (white gloss interior)
- White Satin (white satin interior)

Custom colors available.

Standard Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

Lamping

120V: (6)G16.5 globe bulb
candelabra base 60W max
220-240V: (6)E14 base golf ball
60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

360 watts max

Weight

Approx. 10 lbs (4.5 kg)

Remarks

Specify drop length.
Approx. 6" of extra cable
and cord included.
Only available in two tiers.
Specify tier diameter.
Ceiling mount color matches
specified shade.
White electrical cord is standard.

Remarks continued

Additional weight support
recommended for junction
box installation.
Indoor use and dry locations only.

Dimensions

Available in standard diameters:
Upper tier: 48.5" / 56.5" / 64.5"
(123 cm / 144 cm / 164 cm)
Lower tier: 39.4" / 48.5" / 56.5" / 64.5"
(100 cm / 123 cm / 144 cm / 164 cm)
or specify custom tier diameters.
Min. diameter of tier: 24" (61 cm)
Max. diameter of tier: 72" (183 cm)
Standard distance
between tiers: 7" (18 cm)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height: 13" (33 cm)
Shade: 6" Ø x 5.5" H
(15 Ø x 14 cm H)




427 Boi Pendant Trio
Black Satin + Polished Nickel

Boi Pendant Trio

TECHNICAL SPECIFICATIONS

No. 427

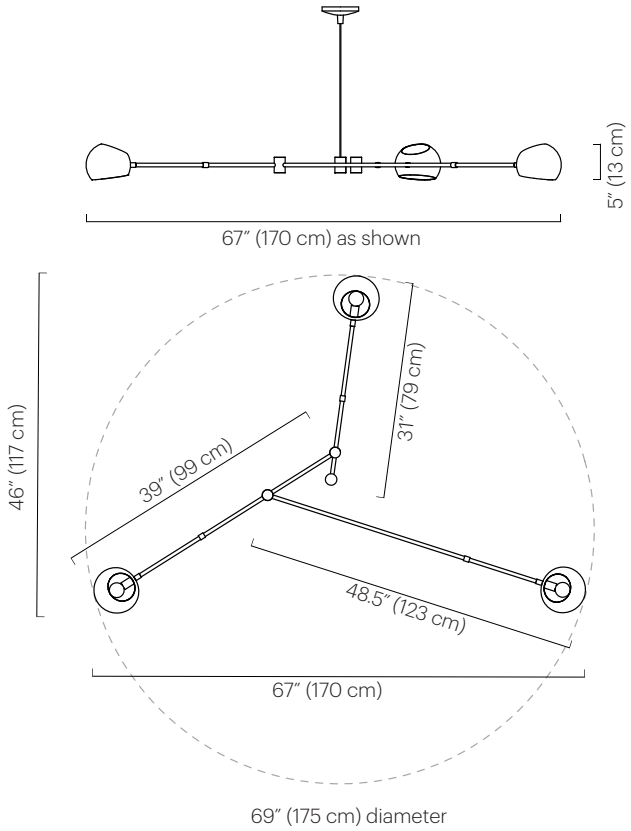

Description

The Boi Pendant Trio is an asymmetrical, balanced fixture with a Boi shade extending from each of its three arms. Shades rotate 320° to cast light directionally.

Materials

Shades: Powder coated steel
Frame: Powder coated steel
Ceiling mount: Powder coated steel
Drop: Stainless steel cable
Hardware: Plated steel and brass

Mount, Frame & Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Hardware

- Polished Nickel
- Brushed Brass

Custom finishes available.

Lamping

120V: (3)G16.5 globe bulb
candelabra base 60W max
220-240V: (3)E14 base golf ball
60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

180 watts max

Weight

10 lbs (4.5 kg)

Remarks

Specify drop length.
Approx. 6" of extra cable and cord included.
Fixture size cannot be customized.
Arm positions are fixed.
Ceiling mount consistent with shade color.

Remarks continued

White electrical cord is standard.
Hardware includes counterweights, swivels, and caps of hubs.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

Fixture diameter: 69" (175 cm)
Fixture height: 5" (13 cm)
Ceiling mount diameter: 5" (13 cm)
Arm lengths: 48.5" / 39" / 31" (123 cm / 99 cm / 79 cm)
Minimum overall height: 7" (18 cm)
Shade: 6" Ø x 5.5" H (15 Ø x 14 cm H)




435 Boi Pendant Duo
Black Gloss

Boi Pendant Duo

TECHNICAL SPECIFICATIONS

No. 435

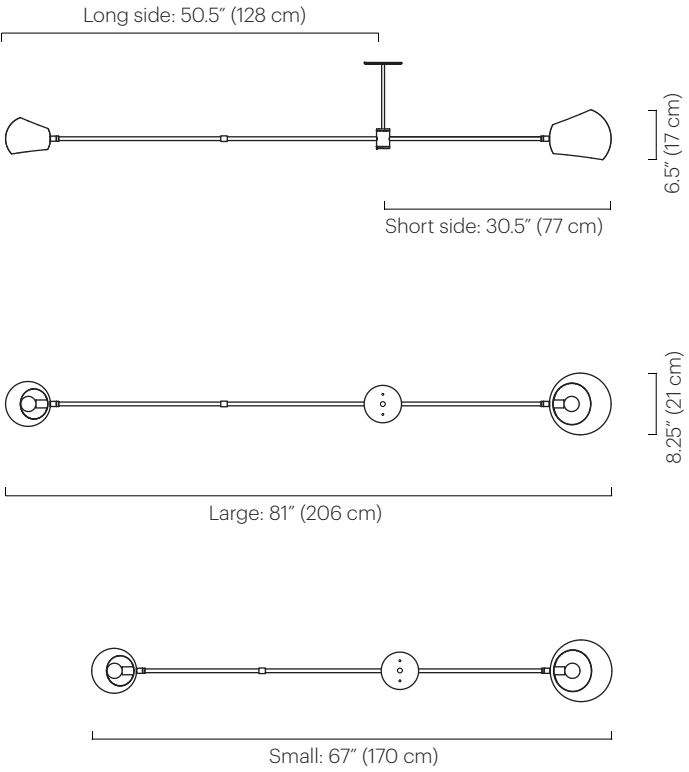

Description

The Boi Pendant Duo is an asymmetrical fixture comprised of one large and one small Boi shade. Shades rotate 320° to cast light directionally. The Pendant is offered in two sizes and also works well when installed in multiples.

Materials

Shades: Powder coated steel
Frame: Powder coated steel
Ceiling mount: Powder coated steel
Drop: Powder coated steel

Mount, Frame & Shade Color

- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)
- White Gloss (white gloss interior)

Custom colors available.

Lamping

120V: (1)A19 or A15 medium base bulb and (1)G16.5 globe candelabra base bulb 60W max
220-240V: (1)E27 base 60W max and (1)E14 base golf ball 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

120 watts max

Weight

10 lbs (4.5 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Specify fixture length.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.
Specify number of tiers.

Dimensions

Fixture length options:
Large: 81" (206 cm)
Small: 67" (170 cm)
Arm lengths from balance point:
Large: long side: 50.5" (128 cm) / short side: 30.5" (77 cm)
Small: long side: 43" (109 cm) / short side: 24" (61 cm)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height: 6" (15 cm)
Small shade: 6" Ø x 5.5" H (15 Ø x 14 cm H)
Large Shade: 8.25" Ø x 6.5" H (21 Ø x 17 cm H)



Boi Cluster Collection

The Boi Cluster Collection arranges multiples in an energetic burst of expression. A dynamic arrangement of Boi shades creates a sculptural form that is at once both playful and timeless.




316 Kopra Standing Lamp
Custom Color

Kopra Standing Lamp

TECHNICAL SPECIFICATIONS

No. 316

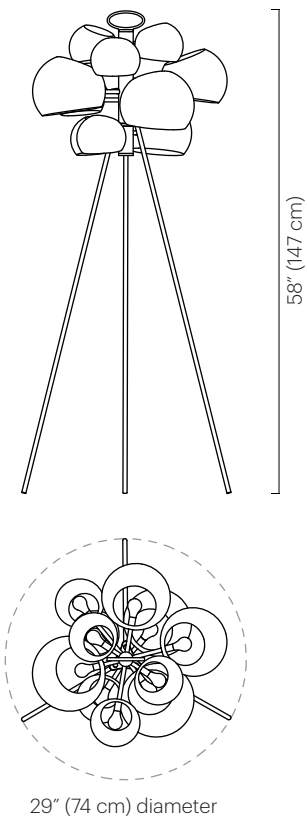

Description

The Kopra Standing lamp features eleven Boi shades of various sizes on a three legged frame topped with an oval handle. Each shade rotates 320° to cast light directionally.

Materials

Shades: Powder coated steel
Frame: Powder coated steel

Frame & Shade Color

- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)
- White Gloss (white gloss interior)

Custom colors available.

Lamping

120V: (11)G16.5 globe bulb, candelabra base
40W max, 20W recommended
220-240V: (11)E14 base golf ball 40W max, 20W recommended
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

440 watts max

Weight

25 lbs (11.3 kg)

Remarks

Not UL listed.
Dimmer switch located on cord.
Cord color is black; length approx. 10 feet.
Indoor use & dry locations only.

Dimensions

Approx diameter: 29" (74 cm)
Height: 58" (147 cm)





316 Kopra Short Standing + Kopra Standing Lamp
Black Gloss

Kopra Short Standing Lamp

TECHNICAL SPECIFICATIONS

No. 316

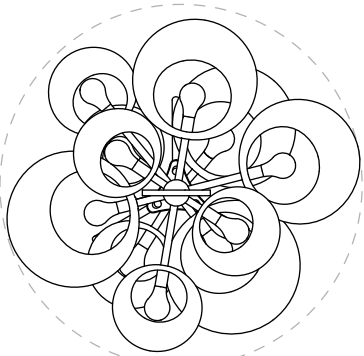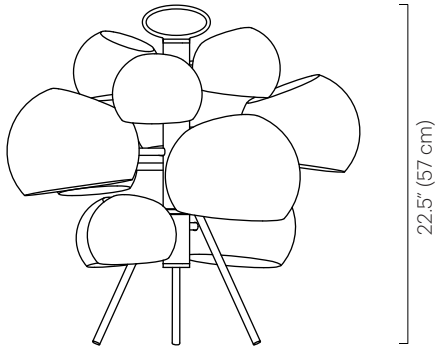

24" (61 cm) approx diameter



Description

The Kopra Short Standing lamp features eleven Boi shades of various sizes on a three legged frame topped with an oval handle. Each shade rotates 320° to cast light directionally.

Materials

Shades: Powder coated steel
Frame: Powder coated steel

Frame & Shade Color

- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)
- White Gloss (white gloss interior)

Custom colors available.

Lamping

120V: (11) G16.5 globe bulbs
candelabra base
40W max, 20W recommended
220-240V: (11) E14 base golf ball
40W max 20W recommended
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

440 watts max

Weight

20 lbs (9 kg)

Remarks

Not UL listed.
Dimmer switch located on cord.
Cord color is black;
length approx. 7 feet.
Indoor use and dry locations only.

Dimensions

Approx diameter: 24" (61 cm)
Height: 22.5" (57 cm)




433 Kopra Burst Pendant
White Gloss

Kopra Burst Pendant

TECHNICAL SPECIFICATIONS

No. 433

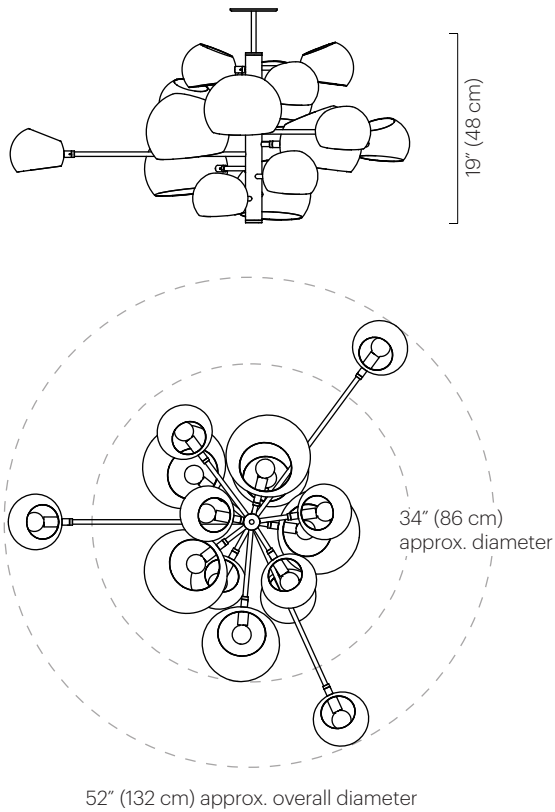

Description

The Kopra Burst is a balanced fixture comprised of fifteen Boi shades of various sizes. The fixture is available fully powder coated or with a plated frame and powder coated shades. Each shade rotates 320° to cast light directionally.

Materials

Shades: Powder coated steel
Frame: Powder coated or plated steel
Ceiling mount: Powder coated steel
Drop: Powder coated or plated steel

Mount & Shade Color

- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)
- White Gloss (white gloss interior)

Frame

- Brushed Brass
- Polished Nickel
- Black Gloss
- Grey Gloss
- White Gloss

Custom colors and finishes available.

Lamping

120V: (15)G16.5 globe bulb
candelabra base
40W max, 20W recommended
220-240V: (15)E14 base golf ball
40W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

600 watts max

Weight

25 lbs (11.3 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Arm lengths are fixed.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions



Approx diameter: 52" (132 cm)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height: 22" (56 cm)



Kopra Pendant

TECHNICAL SPECIFICATIONS

No. 434

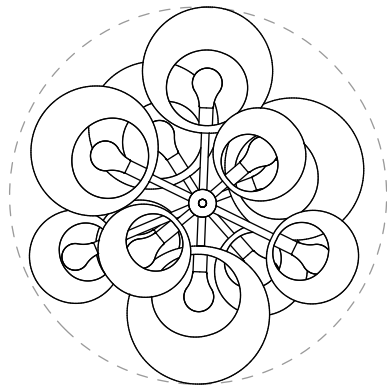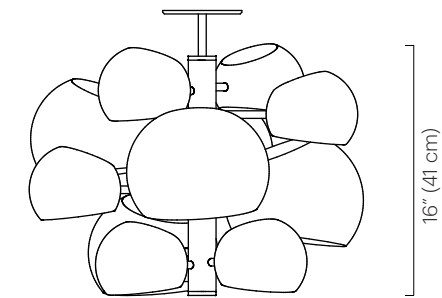

24" (61 cm) approx. diameter



Description

The Kopra Pendant is a balanced fixture comprised of eleven Boi shades of various sizes. The fixture is available fully powder coated or with a plated frame and powder coated shades. Each shade rotates 320° to cast light directionally.

Materials

Shades: Powder coated steel
Frame: Powder coated or plated steel
Ceiling mount: Powder coated steel
Drop: Powder coated or plated steel

Mount & Shade Color

- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)
- White Gloss (white gloss interior)

Frame

- Brushed Brass
- Polished Nickel
- Black Gloss
- Grey Gloss
- White Gloss

Custom colors and finishes available.

Lamping

120V: (11)G16.5 globe bulb
candelabra base
40W max, 20W recommended
220-240V: (11)E14 base golf ball
40W max
Note: Bulbs not included. Halogen bulbs not recommended.

Wattage

440 watts max

Weight

20 lbs (9 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Arm lengths are fixed.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

Approx diameter: 24" (61 cm)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height: 19" (48 cm)



Hennen Collection

Resolutely minimalist, the Hennen Collection conveys precision through aeronautic dynamism. Hennen articulates the studio's language of formal reduction, through simple carved shades composed in two asymmetrical tiers.



430 Hennen Mobile
White Gloss + Polished Nickel



Hennen Mobile

TECHNICAL SPECIFICATIONS

No. 430



Select finishes and colors available.

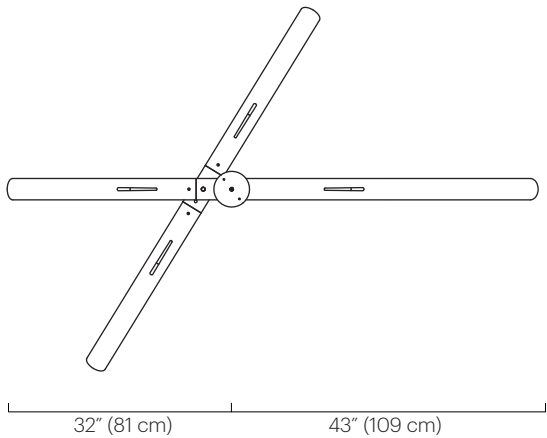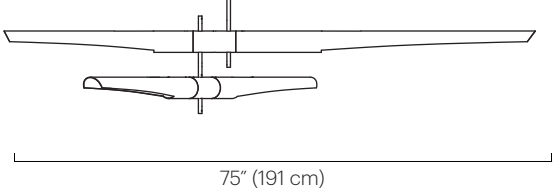

Description

The Hennen Mobile is a balanced fixture comprised of two offset tiers with a total of three short and one long shade that can be set to cast light up or down. Tiers scissor open when installed and arrangement is adjustable on site.

Materials

Shades: Powder coated aluminum
Frame: Plated steel & aluminum
Ceiling mount: Powder coated steel
Drop: Plated steel

Shade Color

- White Gloss (white gloss interior)
- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)

Custom colors available.

Finish

- Polished Nickel

Lamping

120V: (4)T10 incandescent tubular medium base 60W max
220-240V: (4)E27 base (tubular 32mm suggested) 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

240 watts max

Weight

15 lbs (6.8 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Tier lengths cannot be customized.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions


Upper tier: 75" (191 cm)
Lower tier: 59" (150 cm)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height: 14.5" (37 cm)
Long shade: 3" Ø x 42" L (8 Ø x 107 cm L)
Short shade: 3" Ø x 26.5" L (8 Ø x 67 cm L)



Hennen Pendant

TECHNICAL SPECIFICATIONS

No. 431

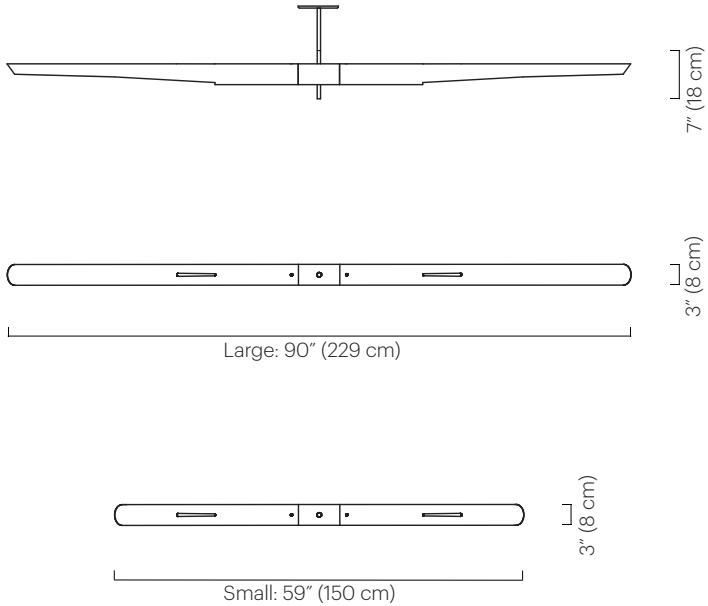

Description

The Hennen Pendant is comprised of two shades suspended from a central drop. The Solo is offered in two sizes, each shade can be set to cast light up or down. This fixture also works well when installed in multiples.

Materials

Shades: Powder coated aluminum
Frame: Plated steel & aluminum
Ceiling mount: Powder coated steel
Drop: Plated steel

Shade Color

- White Gloss (white gloss interior)
- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)

Custom colors available.

Finish

- Polished Nickel

Lamping

120V: (2)T10 incandescent tubular medium base 60W max
220-240V: (2)E27 base (tubular 32mm suggested) 60W max
Note: Bulbs not included. Halogen bulbs not recommended.

Wattage

120 watts max

Weight

10 lbs (4.5 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Specify fixture length.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

Fixture length options:
Large: 90" (229 cm)
Small: 59" (150 cm)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height: 8" (20 cm)
Long shade: 3" Ø x 42" L
(8 Ø x 107 cm L)
Short shade: 3" Ø x 26.5" L
(8 Ø x 67 cm L)





430 Hennen Mobile
White Gloss + Polished Nickel

Hennen Cross

TECHNICAL SPECIFICATIONS

No. 432

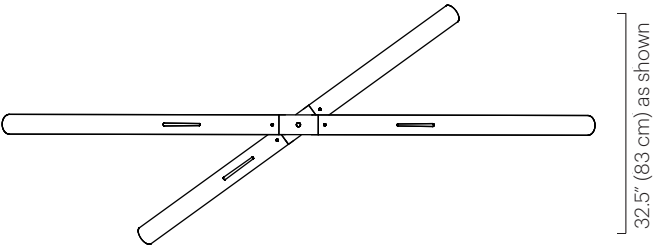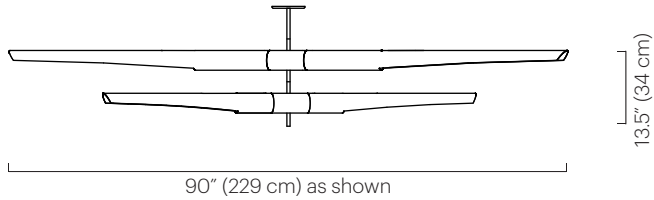

Shown above with 2 tiers

Description

The Hennen Cross is a fixture comprised of two or more tiers on a central axis. Tiers are configured with large or small shades that can be set to cast light up or down. Tiers scissor open and are adjustable on site

Materials

Shades: Powder coated aluminum
Frame: Plated steel & aluminum
Ceiling mount: Powder coated steel
Drop: Plated steel

Shade Color

- White Gloss (white gloss interior)
- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)

Custom colors available.

Finish

- Polished Nickel

Lamping (Two shades per tier)

120V: (2)T10 tubular incandescent medium base 60W max
220-240V: (2)E27 base (tubular 32mm suggested) 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

120 watts max per tier

Weight

Weight varies; depending on number of tiers and dimensions.
2-tier fixture: approx 15 lbs (7 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Specify number of tiers.

Remarks continued

Two tier minimum (four shades). Each tier has two shades. Specify tier lengths. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions

Tier length options:
Large tier: 90" (229 cm)
Small tier: 59" (150 cm)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height:
Two tier: 14.5" (37 cm)
Three tier: 21.25" (54 cm)
Long shade: 3"Ø x 42" L (8 Ø x 107 cm L)
Short shade: 3" Ø x 26.5" L (8 Ø x 67 cm L)

The image shows a minimalist lighting fixture against a light gray background. A thin, gold-colored brass arm extends from the top center, branching into two. Each branch holds a long, thin, curved light fixture that is illuminated from within, casting a warm glow. The fixtures have a dark, possibly black, outer casing. A black cord is attached to the central junction of the arms, forming a loop. The overall design is sleek and modern, emphasizing balance and suspension.

OTTO Collection


The Otto Collection is balanced and suspended in defiance of gravity. Defined by its economy of form, Otto features a cantilevered, brass arm that extends in a naturally occurring arc.



OTTO Sconce

TECHNICAL SPECIFICATIONS

No. 215

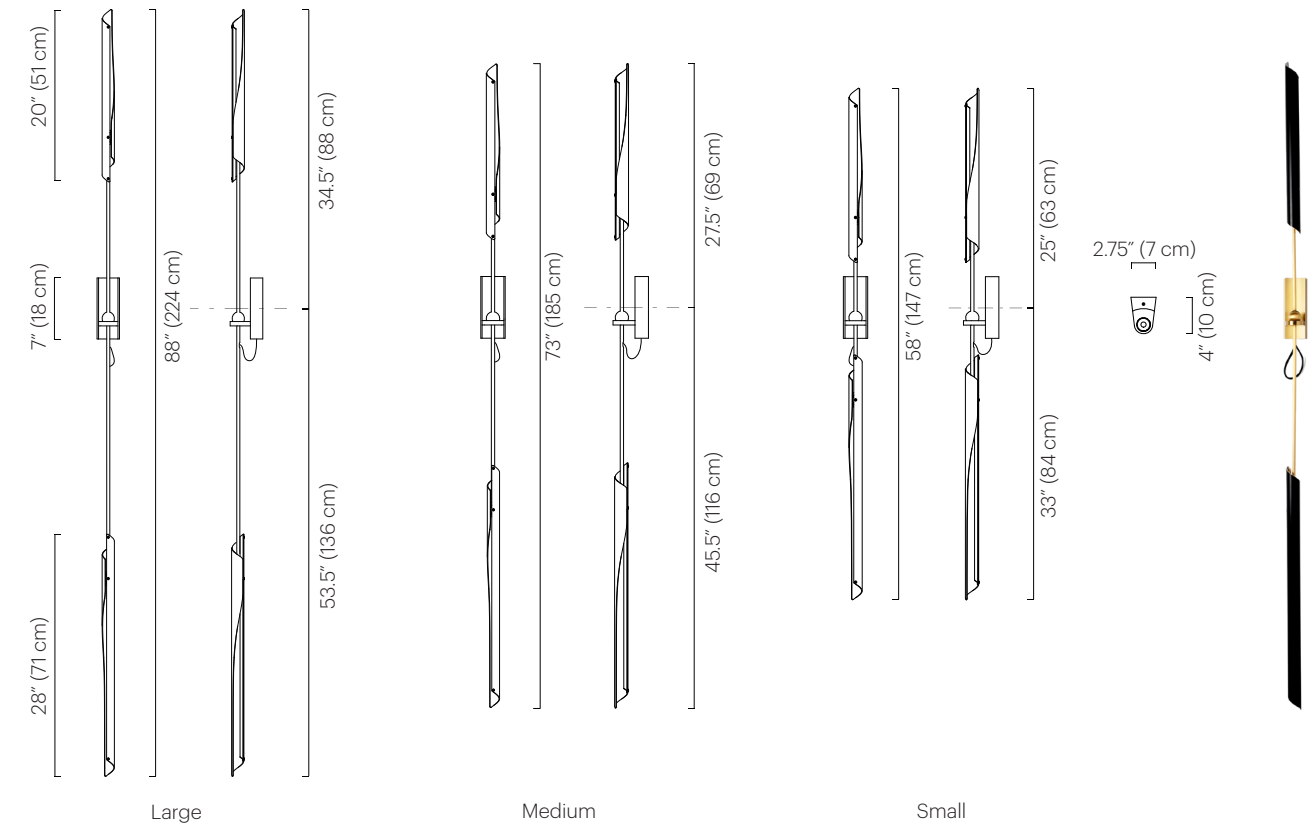

Description

The OTTO Sconce is comprised of two different sized OTTO shades mounted on opposite ends of the arm. Each shade contains a dimmable LED source and rotates 300° to cast light directionally. Available in three sizes.

Materials

Shade: Powder coated aluminum
Wall mount: Plated brass
Frame: Plated brass
Hardware: Plated and polished brass

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 1340 (equivalent to two 60W incandescent bulbs)
CRI: 80+
LED power source: 40W 24V phase dimmable class 2
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

Voltage / Wattage

24 v / 22 watts

Weight

10 lbs (4.5 kg)

Remarks

ADA compliant depth.
Hardwired is standard.
Black exterior electrical cord is standard.
Hardware finish consistent with frame finish.
Indoor use and dry locations only.
Wall mount designed to fit 2" x 4" vertical switch box only.

Dimensions

Large: 4" D x 2.75" W x 88" H (10 D x 7 W x 224 cm H)
Medium: 4" D x 2.75" W x 73" H (10 D x 7 W x 185 cm H)
Small: 4" D x 2.75" W x 58" H (10 D x 7 W x 147 cm H)
Bracket: 4" D x 2.75" W x 7" H (10 D x 7 W x 18 cm H)
Top shade: 1.5" Ø x 20" L (4 Ø x 51 cm L)
Bottom shade: 1.5" Ø x 28" L (4 Ø x 71 cm L)

215 OTTO Sconce
Black Satin + Brushed Brass




438 OTTO Loop Pendant
Black Satin + Brushed Brass

OTTO Loop Pendant

TECHNICAL SPECIFICATIONS

No. 438

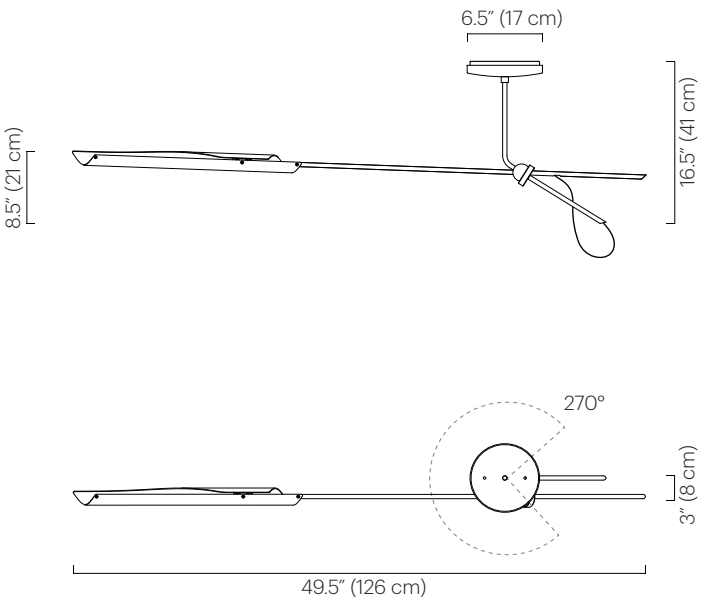

Description

The OTTO Loop Pendant is a lower profile version of our OTTO One Arm fixture featuring a single cantilevered arm. The OTTO shade contains a dimmable LED source and rotates 300° to cast light directionally. The fixture can rotate 270° from the canopy.

Materials

Shade: Powder coated aluminum
Ceiling mount: Powder coated aluminum and steel.
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 840 (equivalent to one 60W incandescent bulb)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

ELV Dimmer compatible

Voltage / Wattage

24V /12W

Weight

5 lbs (2.3 kg)

Remarks

Drop height is set at 16.5" (41 cm). Fixed drop not adjustable on site. Arm length fixed. Not for use on sloped ceilings. Black exterior electrical cord is standard. Hardware finish consistent with frame finish. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions

49.5" L x 16.5" H x 3" W
(126 L x 41 H x 8 cm W)
Canopy mount: 6.5" Ø x 1.25" H
(17 Ø x 3 cm H)
Shade: 1.5" Ø x 20" L
(4 Ø x 51 cm L)




443 OTTO One Arm Pendant
Ivory Satin + Brushed Brass

OTTO Pendant

TECHNICAL SPECIFICATIONS

No. 443

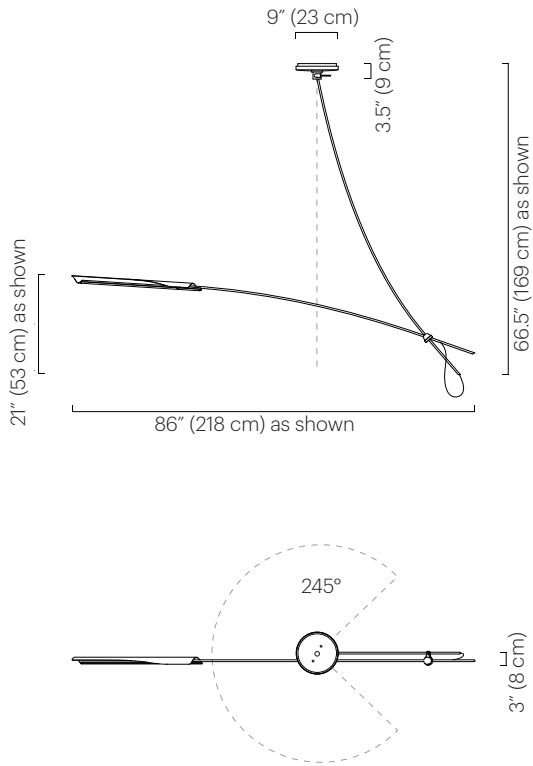

Description

The OTTO Pendant features a single cantilevered arm extending from a drop. The naturally occurring arcs of the fixture will vary depending on the length of the drop. The OTTO shade contains a dimmable LED source and rotates 300° to cast light directionally. The fixture can rotate 245° from the canopy.

Materials

Shade: Powder coated aluminum
Ceiling mount: Powder coated and plated aluminum
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 840 (equivalent to one 60W incandescent bulb)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

Voltage / Wattage

24V / 11 watts

Weight

5 lbs (2.3 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Arm length is fixed.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.

Remarks continued

Hardware finish consistent with frame finish.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

3" D x 86" W x 21" H
(8 D x 218 W x 53 cm H)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Shade: 1.5" Ø x 28" L
(4 Ø x 71 cm L)
Min overall height: 27.5" (70 cm)
Max overall height: 135.5" (344 cm)




444 OTTO Two Arm Pendant
White Satin + Brushed Brass

OTTO Two Arm Pendant

TECHNICAL SPECIFICATIONS

No. 444

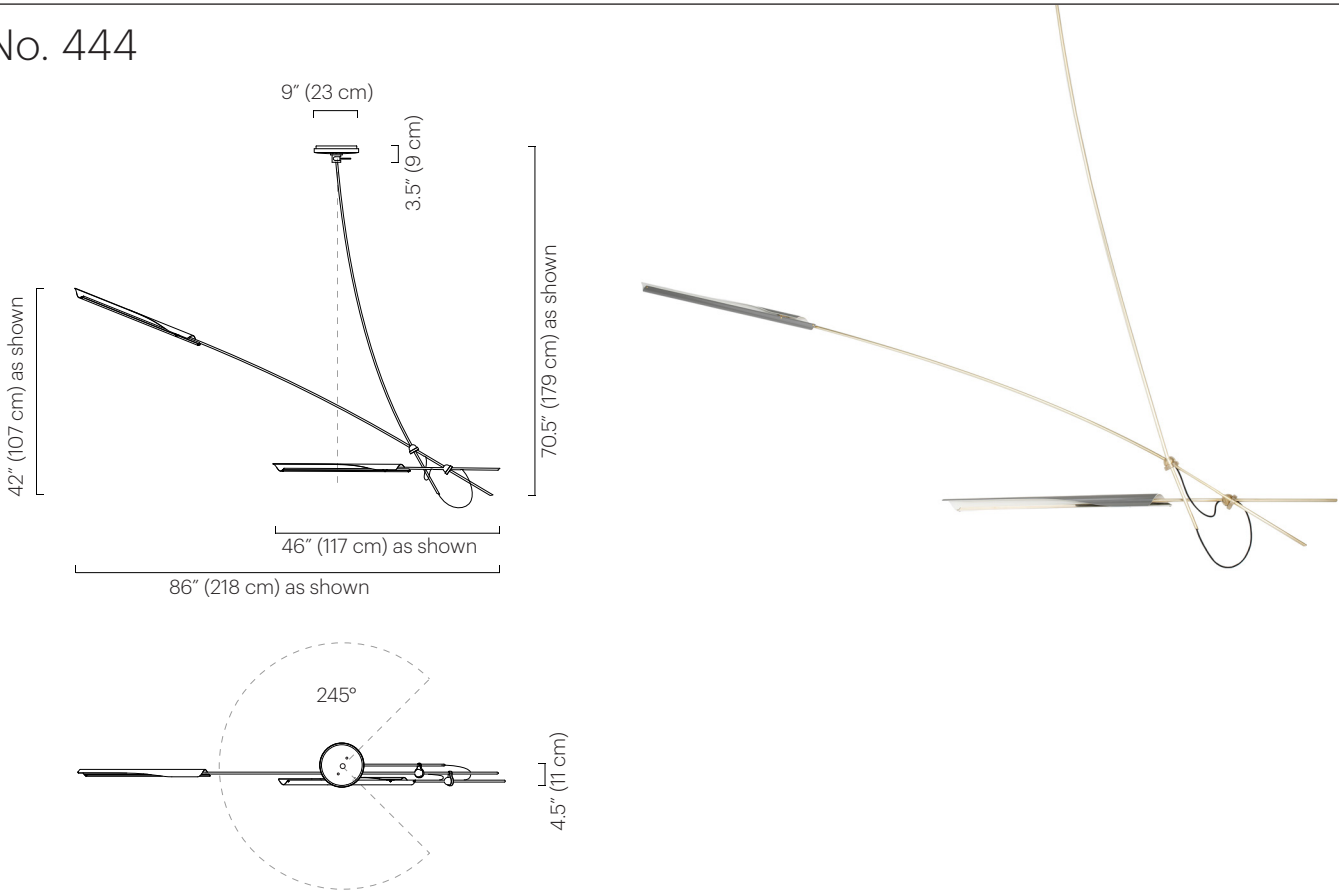

Description

The OTTO Two Arm features two arms extending from a drop. The naturally occurring arcs of the fixture will vary depending on the length of the drop. The OTTO shade contains a dimmable LED source and rotates 300° to cast light directionally. The fixture can rotate 245° from the canopy.

Materials

Shade: Powder coated aluminum
Ceiling mount: Powder coated and plated aluminum
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 1680 (equivalent to two 60W incandescent bulbs)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

Voltage / Wattage

24V / 22 watts

Weight

5 lbs (2.3 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Arm length is fixed.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.

Remarks continued

Hardware finish consistent with frame finish.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

4.5" D x 86" W x 42" H
(11 D x 218 W x 107 cm H)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Shades: 1.5" Ø x 28" L
(4 Ø x 71 cm L)
Min overall height: 34.5" (88 cm)
Max overall height: 132.5" (336.5 cm)




445 OTTO Pendant Duo
Grey Gloss + Brushed Brass

OTTO Pendant Duo

TECHNICAL SPECIFICATIONS

No. 445

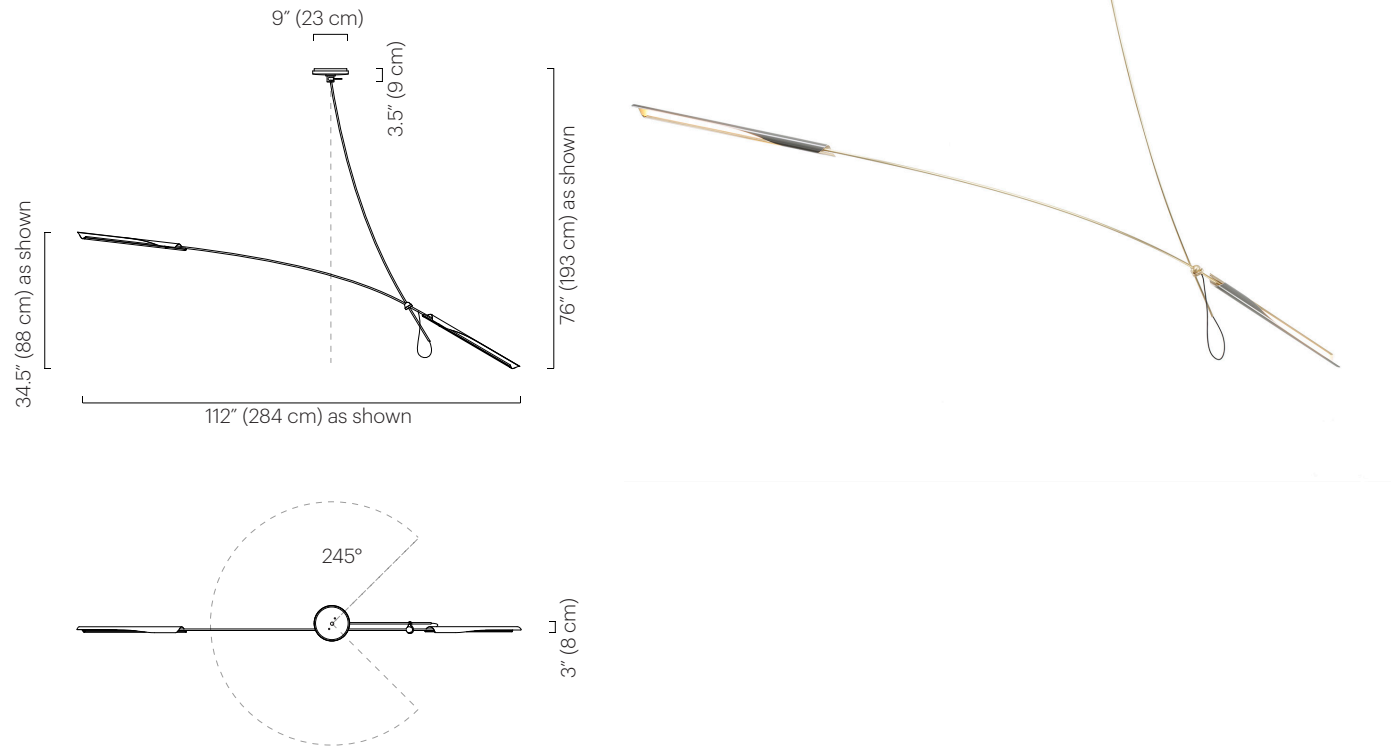

<p>Description</p> <p>The OTTO Pendant Duo features one arm with a shade on either end extending from a customizable drop. The naturally occurring arcs of the fixture will vary depending on the length of the drop. The OTTO shades contain a dimmable LED source and rotate 300° to cast light directionally. The fixture can rotate 245° from the canopy.</p>	<p>Shade Color</p> <ul style="list-style-type: none">● Black Satin (ivory satin interior)● Grey Gloss (ivory satin interior)● Ivory Satin (ivory satin interior)○ White Satin (white satin interior) <p>Custom colors available.</p>	<p>Power Supply</p> <p>60W 24V For 120V areas: dimmable Class 2 included in canopy. For 220-240V areas: remote power supply only. Not included.</p>	<p>Remarks continued</p> <p>Hardware finish consistent with frame finish. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.</p>
<p>Materials</p> <p>Shade: Powder coated aluminum Ceiling mount: Powder coated and plated aluminum Frame: Plated brass Drop: Plated brass Hardware: Plated and polished brass</p>	<p>Finish</p> <ul style="list-style-type: none">● Brushed Brass● Polished Nickel <p>Custom finishes available.</p>	<p>Dimmer Compatibility</p> <p>Dimmable with MLV/TRIAC (leading edge) switch</p>	<p>Dimensions</p> <p>3" D x 112" W x 34.5" H (8 D x 284 W x 88 cm H) Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H) Shades: 1.5" Ø x 28" L (4 Ø x 71 cm L) Min overall height: 37.5" (95 cm) Max overall height: 134.5" (342 cm)</p>
	<p>Lamping</p> <p>LED: Warm white 2700K Lumens: 1680 (equivalent to two 60W incandescent bulbs) CRI: 80+ 50,000 LED life hours (approx.)</p>	<p>Voltage / Wattage</p> <p>24V / 22 watts</p>	
		<p>Weight</p> <p>5 lbs (2.3 kg)</p>	
		<p>Remarks</p> <p>Specify drop length. Fixed drop not adjustable on site. Arm length is fixed. Not for use on sloped ceilings. Black exterior electrical cord is standard.</p>	




447 OTTO V + 446 OTTO L Pendant + Custom Canopy
Black Satin + Brushed Brass

OTTO L Pendant

TECHNICAL SPECIFICATIONS

No. 446

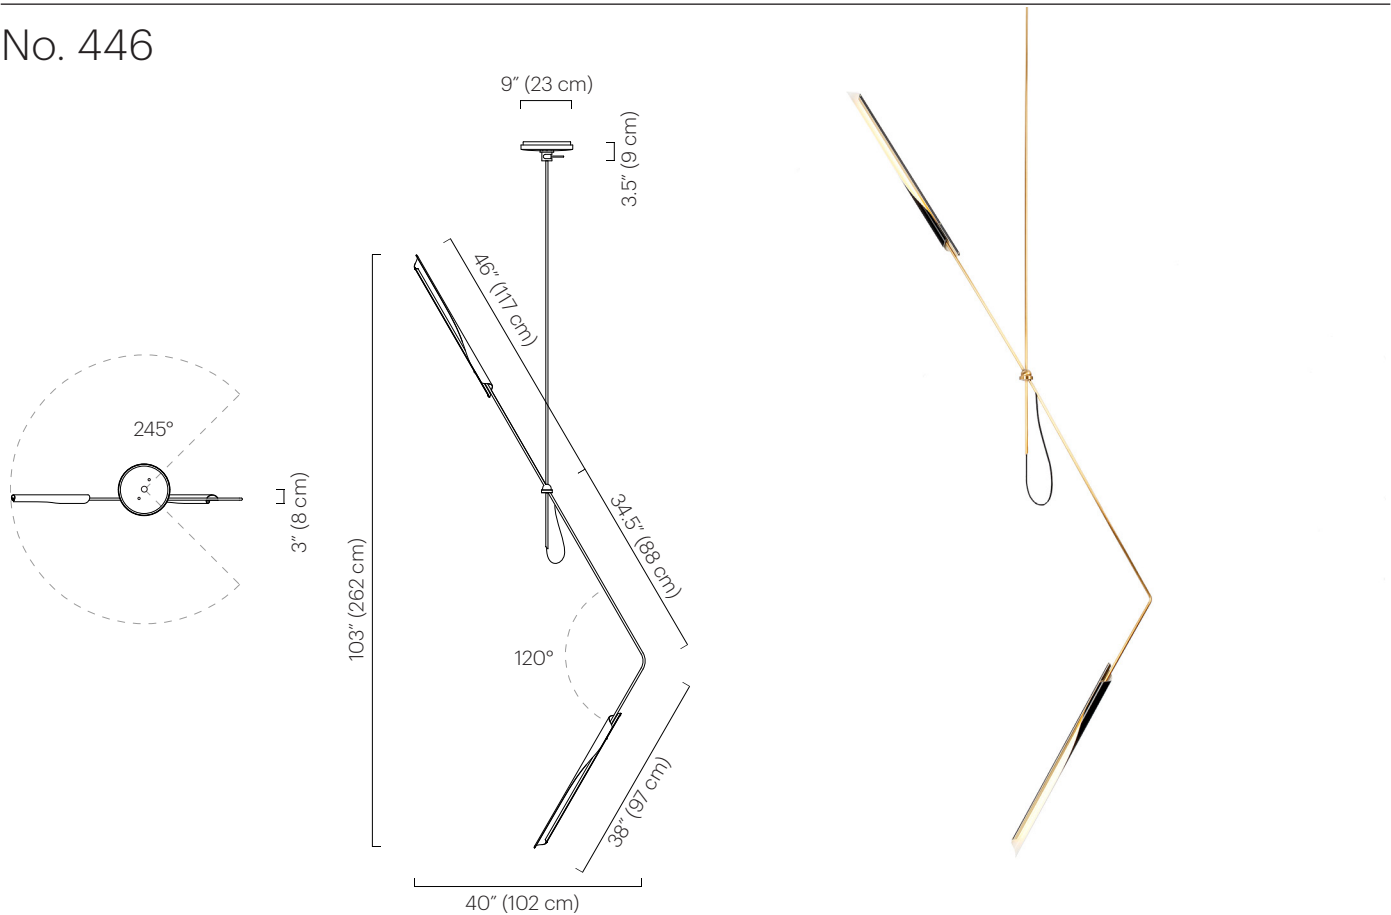

Description

The OTTO L features one bent arm with an OTTO shade on each end. The OTTO shade contains a dimmable LED source and rotates 300° to cast light directionally. The fixture can rotate 245° from the canopy. Fixture is balanced by design; angle is not adjustable.

Materials

Shade: Powder coated aluminum
Ceiling mount: Powder coated and plated aluminum
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 1680 (equivalent to two 60W incandescent bulbs)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

Voltage / Wattage

24V / 22 watts

Weight

5 lbs (2.3 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Arm length is fixed.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.
Hardware finish consistent with frame finish.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.
Specify number of tiers

Dimensions

3" D x 40" W x 103" H
(8 D x 102 W x 262 cm H)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Shades: 1.5" Ø x 28" L
(4 Ø x 71 cm L)
Min overall height: 109"
(277 cm)




446 OTTO L + LS Pendant
Black Satin + Brushed Brass

OTTO LS Pendant

TECHNICAL SPECIFICATIONS

No. 446

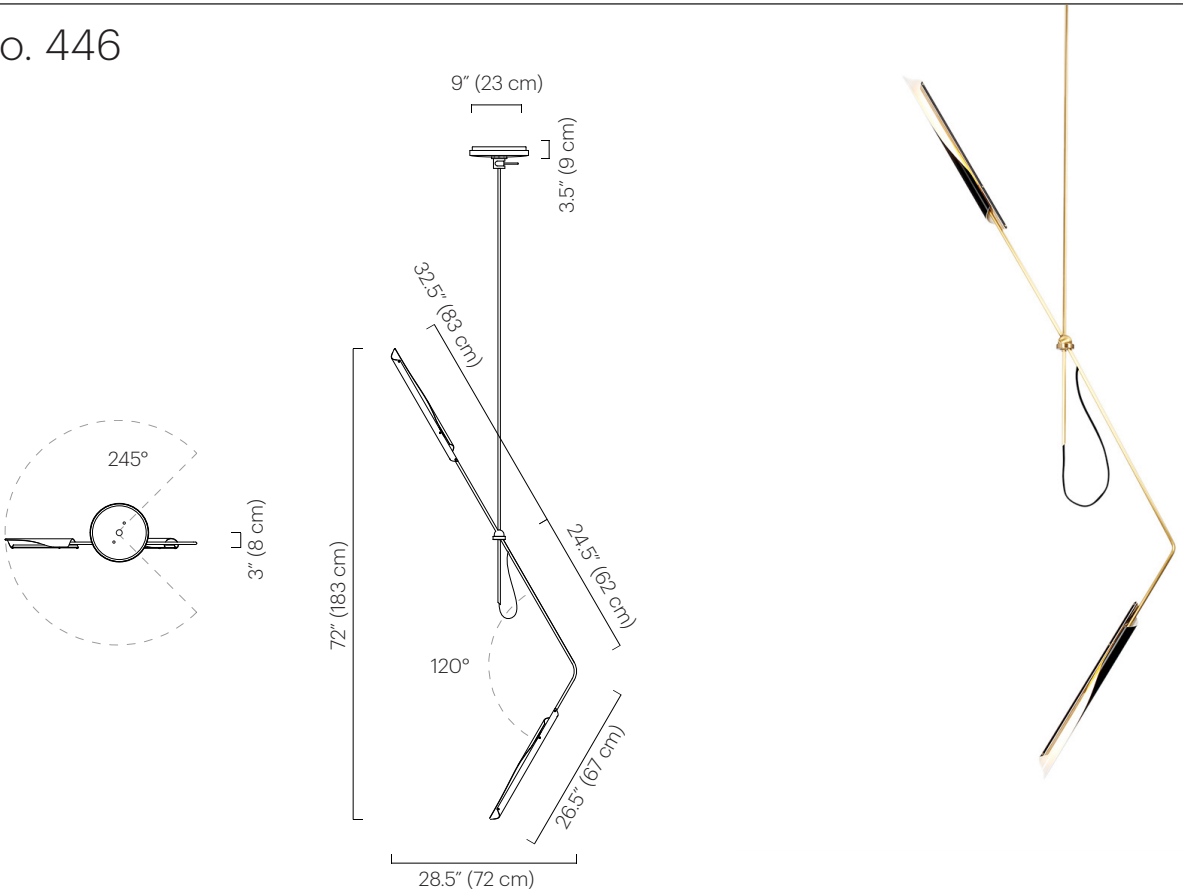

Description

The OTTO LS features one bent arm with an OTTO shade on each end. The OTTO shades contain a dimmable LED source and rotate 300° to cast light directionally. The fixture can rotate 245° from the canopy. Fixture is balanced by design; angle is not adjustable.

Materials

Shade: Powder coated aluminum
Ceiling mount: Powder coated and plated aluminum
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 1000 (equivalent to two 40W incandescent bulbs)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

Voltage / Wattage

24V / 22 watts

Weight

5 lbs (2.3 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Arm length is fixed.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.
Hardware finish consistent with frame finish.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.
Specify number of tiers

Dimensions

3" D x 28.5" W x 72" H
(8 D x 72 W x 183 cm H)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Shades: 1.5" Ø x 20" L
(4 Ø x 51 cm L)
Min overall height: 78" (198 cm)




Custom 447 OTTO V + 446 OTTO L Pendant
Black Satin + Brushed Brass

OTTO V Pendant

TECHNICAL SPECIFICATIONS

No. 447

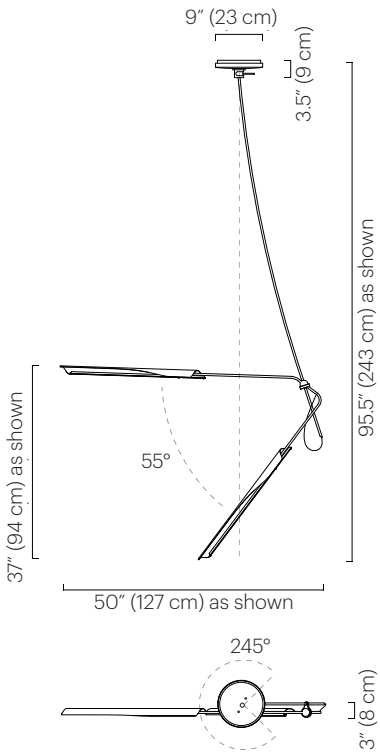

Description

The OTTO V features one bent arm with an OTTO shade on each end. The naturally occurring arc of the drop will vary depending on the length. Fixture is balanced by design; arm angles are not adjustable. The OTTO shades contain a dimmable LED source and rotate 300° to cast light directionally. The fixture can rotate 245° from the canopy.

Materials

Shade: Powder coated aluminum
Ceiling mount: Powder coated and plated aluminum
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 1680 (equivalent to two 60W incandescent bulbs)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

Voltage / Wattage

24V / 22 watts

Weight

5 lbs (2.3 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Arm length is fixed.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.

Remarks continued

Hardware finish consistent with frame finish.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions


3" D x 50" W x 37" H
(8 D x 127 W x 94 cm H)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Shade: 1.5" Ø x 28" L
(4 Ø x 71 cm L)
Min overall height: 42.5" (108 cm)
Max overall height: 131.5" (334 cm)



OTTO X Pendant

TECHNICAL SPECIFICATIONS

No. 448

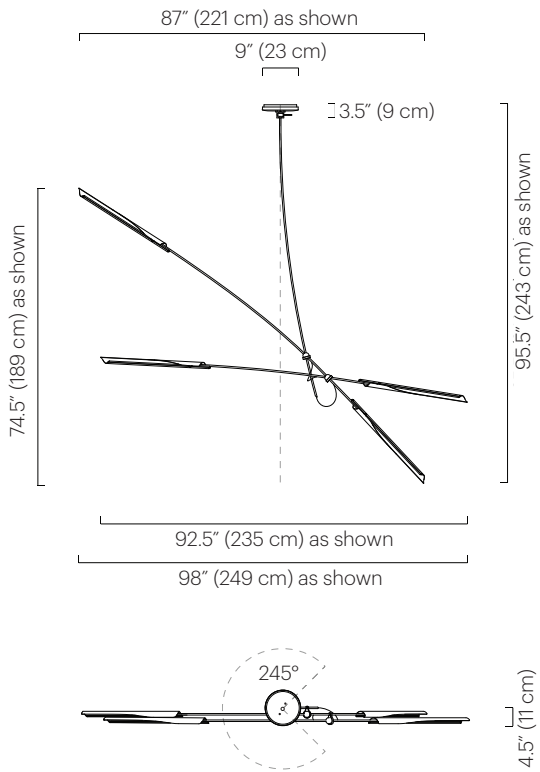

Description

The OTTO X features two intersecting arms with an OTTO shade on each end extending from a drop. The naturally occurring arcs of the fixture will vary depending on the length of the drop. All four OTTO shades contain a dimmable LED source. Each shade rotates 300° to cast light directionally. The fixture can rotate 245° from the canopy.

Materials

Shades: Powder coated aluminum
Ceiling mount: Powder coated and plated aluminum
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 3360 (equivalent to four 60W incandescent bulbs)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

Voltage / Wattage

24V / 44 watts

Weight

10 lbs (4.5 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Arm length is fixed.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.

Remarks continued

Hardware finish consistent with frame finish.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

4.5" D x 98" W x 74.5" H
(11 D x 249 W x 189 cm H)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Shade: 1.5" Ø x 28" L
(4 Ø x 71 cm L)
Min overall height: 74" (188 cm)
Max overall height: 159" (404 cm)



Treble Collection


The Treble Collection is a study in tensile elegance that harmonizes complexity with restraint. Curved brass arms are drawn, improvisational gestures. Each metal shade maintains order with a gently percussive rhythm.



Treble Sconce

TECHNICAL SPECIFICATIONS

No. 218

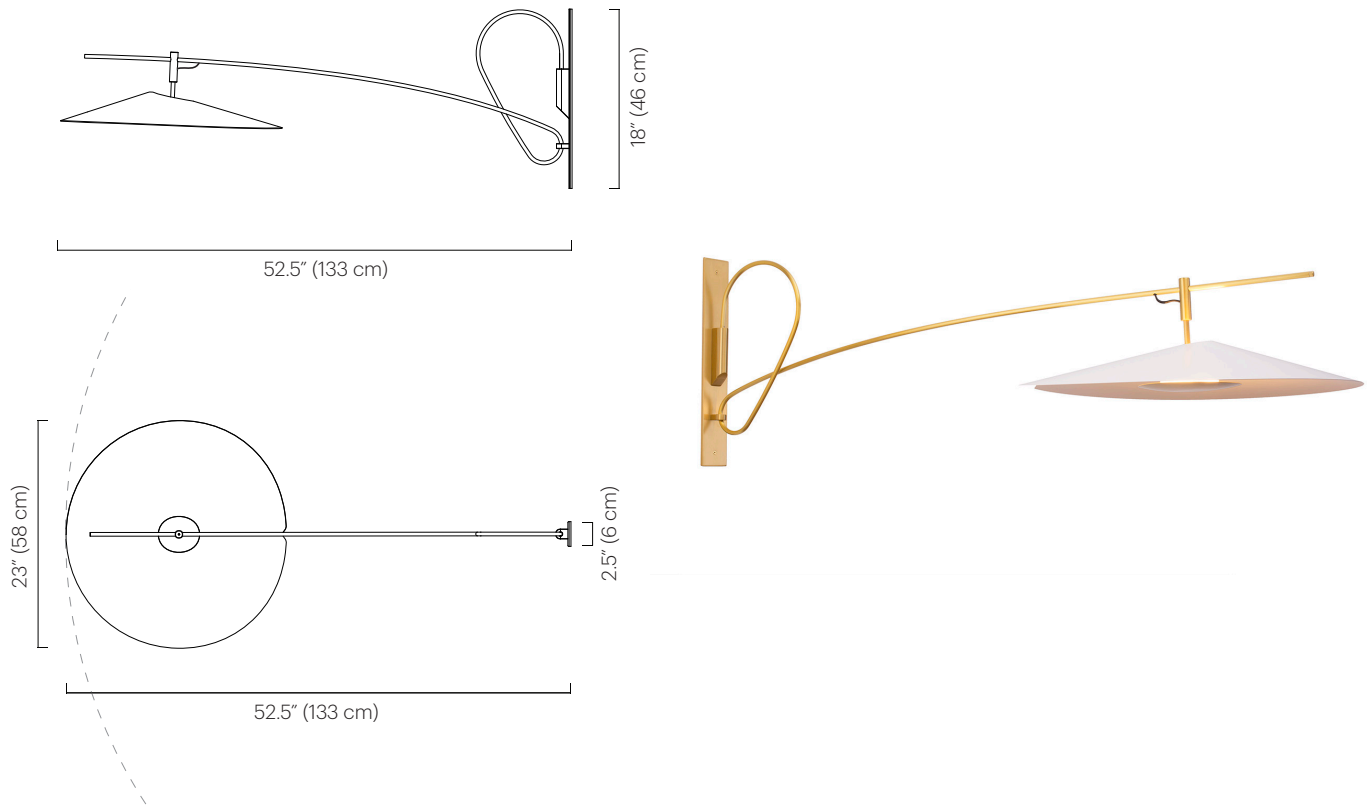

Description

The Treble Sconce features a single arm anchored by a solid brass wall mount. The sconce has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with an acrylic diffuser. The arm swings side to side from the wall mount.

Materials

Shade: Powder coated aluminum
Frame: Plated brass
Wallmount: Plated brass
Lamp enclosure: Acrylic, aluminum, steel and plated brass.

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Anodized:

- Polished Black (matte gold interior)
- Polished Black (red ombre interior)

Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 1200 (equivalent to one 75W incandescent bulb)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

ELV Dimmer compatible

Voltage / Wattage

24V / 11.5 W

Weight

15 lbs (6.8 kg)

Remarks

Each fixture is handmade and unquily balance, therefore shade location may vary up to 2" on arm. Shade does not rotate. Black exterior electrical cord is standard.

Custom arm length available 36" - 72" (91 -182 cm)
Additional weight support reccomended.
Hardware finish consistent with frame finish.
Indoor use and dry locations only.
Wall mount designed to fit 2" x 4" vertical switch box only.

Dimensions

52.5" L x 23" W x 18" H
(133 L x 58 W x 46 cm H)
Wallmount: 2.5" W x 18" H
(6 W x 46 cm H)
Shade: 23" Ø x 4" H
(58 Ø x 10 cm H)


218 Treble Sconce
White Satin + Brushed Brass



Treble Standing Lamp

TECHNICAL SPECIFICATIONS

No. 318

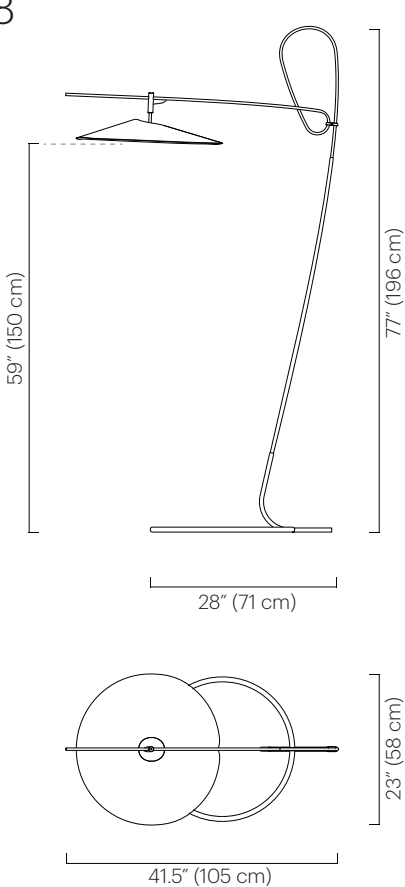

Description

The Treble Standing Lamp features a plated frame and a single Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with an acrylic diffuser.

Materials

Shade: Anodized or powder coated aluminum
Frame: Plated steel and brass
Lamp enclosure:rylic, aluminum, steel and plated brass.

Shade Color

- Powder coated:
- Black Satin (ivory satin interior)
 - Grey Gloss (ivory satin interior)
 - Ivory Satin (ivory satin interior)
 - White Satin (white satin interior)

Custom colors available.

Anodized:

- Polished Black (matte gold interior)
- Polished Black (red ombre interior)

Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 825 (equivalent to one 60W incandescent bulb)
CRI: 80+
54,000 LED life hours (approx.)

Voltage / Wattage

120V (Direct Voltage) / 10W

Weight

20 lbs (9 kg)

Remarks


Fixture is not UL listed.
Arm length is fixed.
Shade does not rotate.
Hardware finish consistent with frame finish.
Dimmer switch located on cord.
Cord color is black; length approx. 10 feet.
Indoor use and dry locations only.

Dimensions

41.5" D x 23" W x 77" H
(105 D x 58 W x 196 cm H)
Shade: 23" Ø x 4" H
(58 Ø x 10 cm H)

318 Treble Standing Lamp
Polished Black (Red Ombre Interior) + Brushed Brass



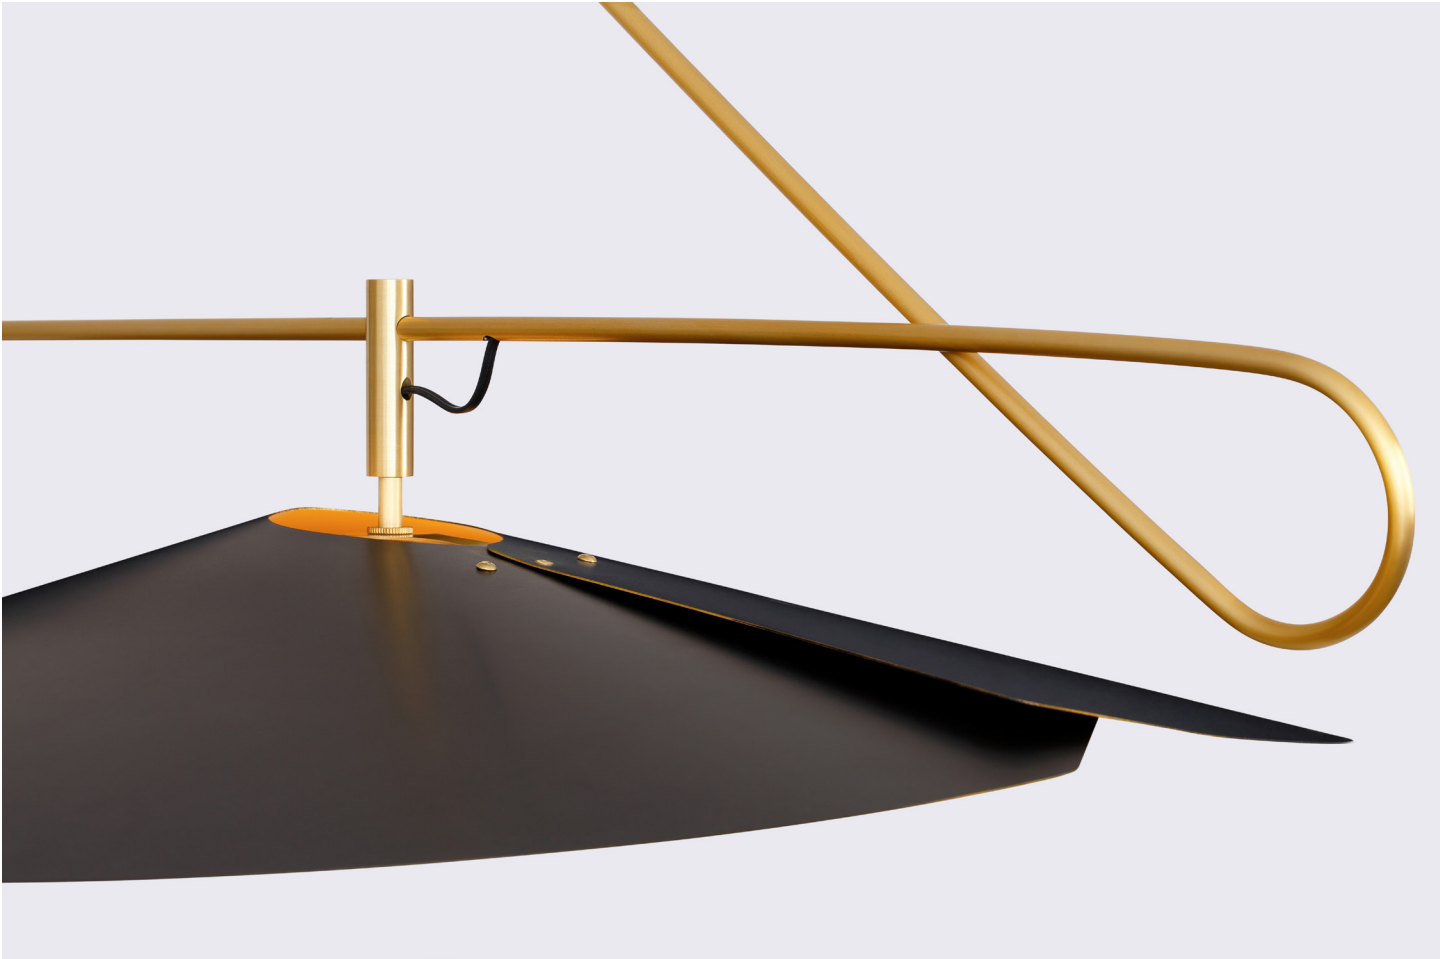


451 Treble Loop Pendant
Polished Black (Red Ombre Interior) + Brushed Brass

Treble Loop Pendant

TECHNICAL SPECIFICATIONS

No. 451

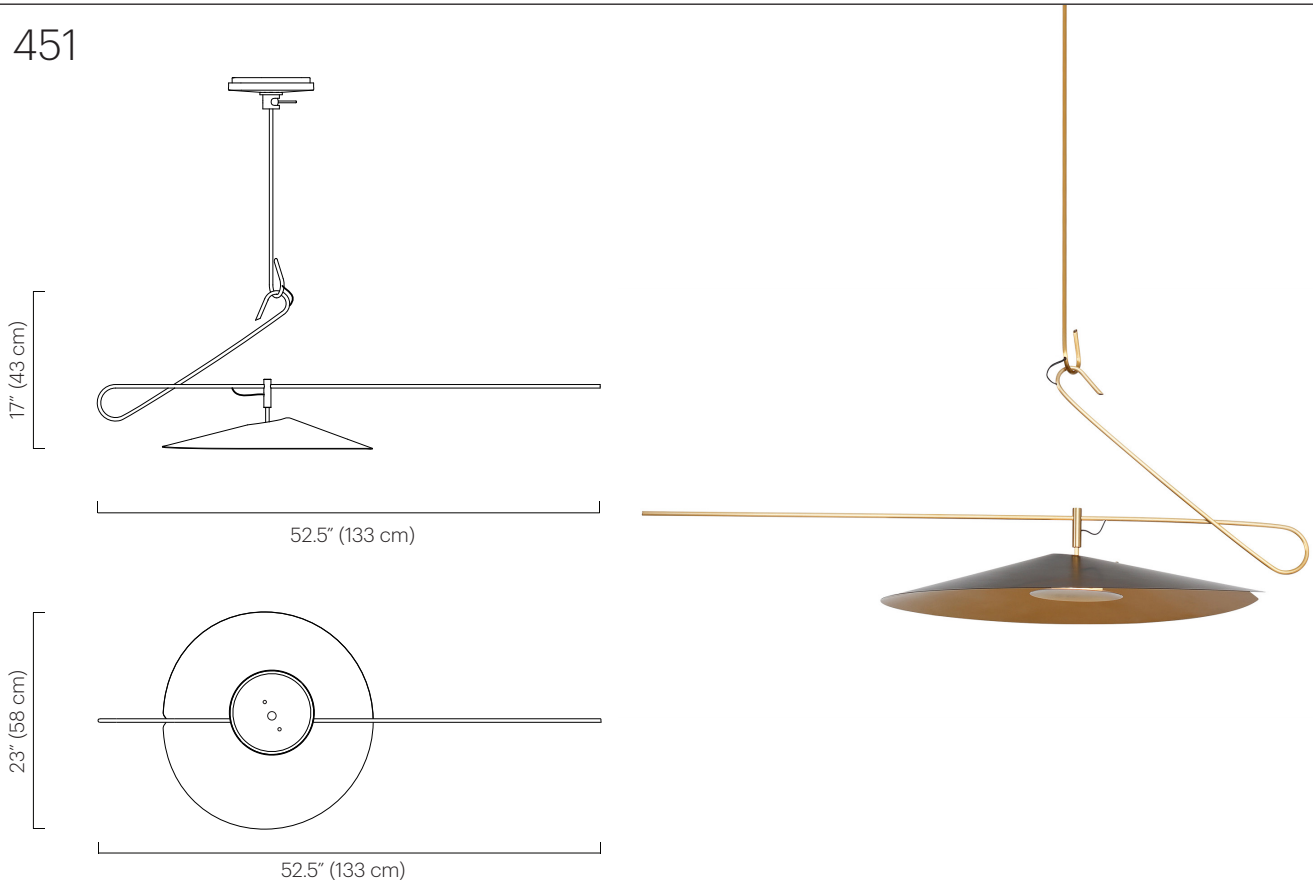

Description

The Treble Loop is a balanced fixture on an asymmetrical axis, which allows gentle movement. The fixture has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with an acrylic diffuser. The fixture can rotate 245° from the canopy.

Materials

Shade: Powder coated aluminum
Ceiling mount: Powder coated aluminum and steel.
Frame: Plated brass
Drop: Plated brass
Lamp enclosure: Acrylic, aluminum, steel and plated brass.

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Anodized:

- Polished Black (matte gold interior)
- Polished Black (red ombre interior)

Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 1200 (equivalent to one 75W incandescent bulb)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

ELV Dimmer compatible

Voltage / Wattage

24V /12W

Weight

10 lbs (4.5 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Arm and frame lengths are fixed.
Shade does not rotate.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.
Hardware finish consistent with frame finish.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

52.5" L x 23" W x 17" H
(133 L x 58 W x 43 cm H)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Shade: 23" Ø x 4" H
(58 Ø x 10 cm H)
Min. overall height: 25" (63 cm)




452 Treble Tiered Mobile 2 Tier
Grey Gloss + Brushed Brass

Treble Tiered Mobile, 2 Tier

TECHNICAL SPECIFICATIONS

No. 452

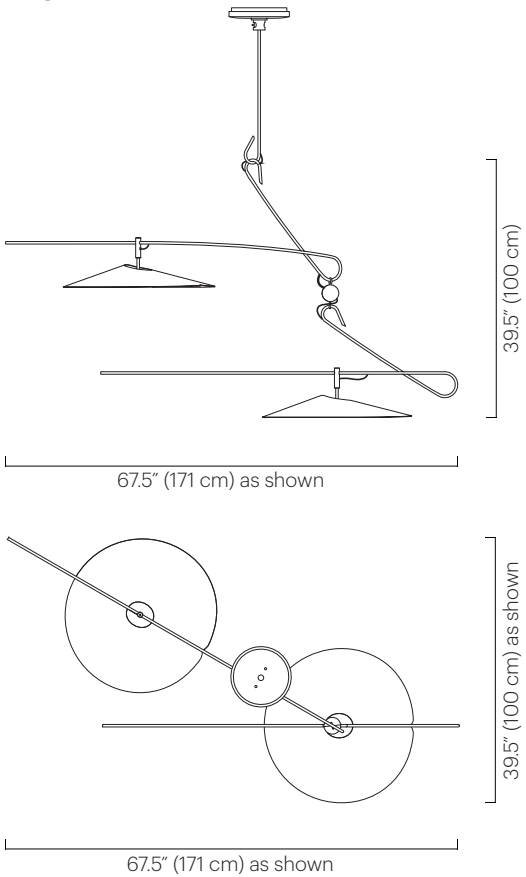

Description

The Treble Tiered Mobile features two tiers of different lengths that balance on asymmetrical axes, which allows gentle movement. Each tier has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with an acrylic diffuser. The fixture can rotate 245° from the canopy. Tier rotation is adjustable and can be set on site.

Materials

Shade: Powder coated aluminum
Ceiling mount: Powder coated aluminum and steel.
Frame: Plated brass
Drop: Plated brass
Lamp enclosure: Acrylic, aluminum, steel and plated brass.

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Anodized:

- Polished Black (matte gold interior)
- Polished Black (red ombre interior)

Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 2400 (equivalent to two 75W incandescent bulbs)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

ELV Dimmer compatible

Voltage / Wattage

24V / 23W

Weight

15 lbs (6.8 kg)

Remarks

Each fixture is handmade and therefore may vary up to 3" in overall height due to the counterbalancing nature. Specify drop length. Arm and frame lengths are fixed. Shade does not rotate. Fixed drop not adjustable on site.

Remarks continued

Not for use on sloped ceilings. Black exterior electrical cord is standard. Hardware finish consistent with frame finish. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions


Tier 1: 52.5" (133 cm)
Tier 2: 57" (145 cm)
Max. dimensions: 90" L x 23" W (229 L x 58 cm W)
Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H)
Shade: 23" Ø x 4" H (58 Ø x 10 cm H)
Min. overall height: 47.5" (121 cm)



Treble Tiered Mobile, 3 Tier

TECHNICAL SPECIFICATIONS

No. 452

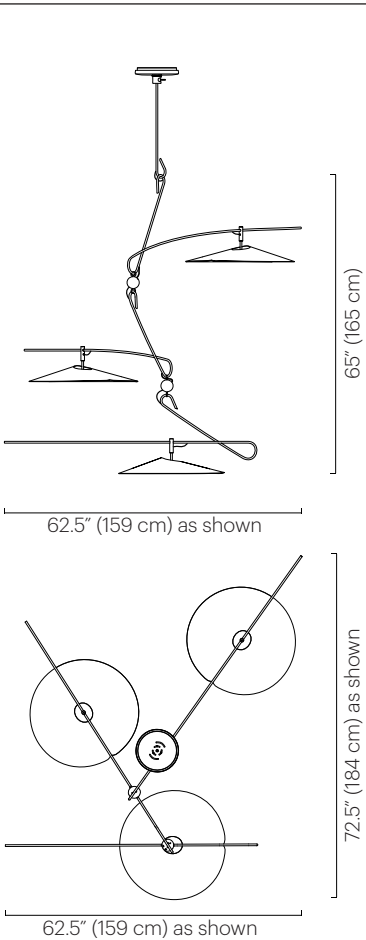

Description

The Treble Tiered Mobile features three tiers of different lengths that balance on asymmetrical axes, which allows gentle movement. Each tier has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with an acrylic diffuser. The fixture can rotate 245° from the canopy. Tier rotation is adjustable and can be set on site.

Materials

Shade: Powder coated aluminum
Ceiling mount: Powder coated aluminum and steel.
Frame: Plated brass
Drop: Plated brass
Lamp enclosure: Acrylic, aluminum, steel and plated brass.

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Anodized:

- Polished Black (matte gold interior)
- Polished Black (red ombre interior)

Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

Lamping

LED: Warr
Lumens: 1,300
75W incandescent bulb (3000K)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

ELV Dimmer compatible

Voltage / Wattage

24V / 35W

Weight

25 lbs (11.3) kg

Remarks

Each fixture is handmade and therefore may vary up to 3" in overall height due to the counterbalancing nature. Specify drop length. Arm and frame lengths are fixed. Shade does not rotate. Fixed drop not adjustable on site.

Remarks continued

Not for use on sloped ceilings. Black exterior electrical cord is standard. Hardware finish consistent with frame finish. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions

Tier 1: 52.5" (133 cm)
Tier 2: 57" (145 cm)
Tier 3: 63" (160 cm)
Max. dimensions: 108.5" L x 23" W (267 L x 58 cm W)
Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H)
Shade: 23" Ø x 4" H (58 Ø x 10 cm H)
Min. overall height: 73" (185 cm)




452 Treble Tiered Mobile 4 Tier
Custom Color

Treble Tiered Mobile, 4 Tier

TECHNICAL SPECIFICATIONS

No. 452

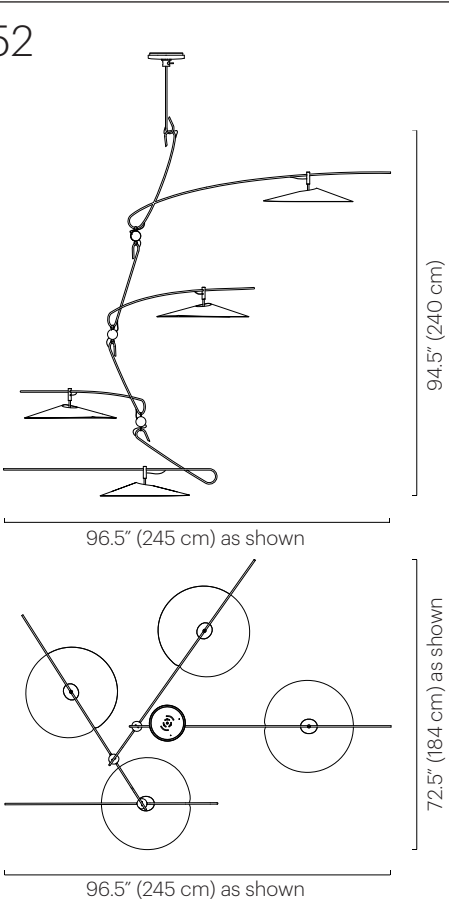

Description

The Treble Tiered Mobile features four tiers of different lengths that balance on asymmetrical axes, which allows gentle movement. Each tier has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with an acrylic diffuser. The fixture can rotate 245° from the canopy. Tier rotation is adjustable and can be set on site.

Materials

Shade: Powder coated aluminum
Ceiling mount: Powder coated aluminum and steel.
Frame: Plated brass
Drop: Plated brass
Lamp enclosure: Acrylic, aluminum, steel and plated brass.

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Anodized:

- Polished Black (matte gold interior)
- Polished Black (red ombre interior)

Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 4800 (equivalent to four 75W incandescent bulbs)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

ELV Dimmer compatible

Voltage / Wattage

24V / 46 W

Weight

30 lbs (13.6 kg)

Remarks

Each fixture is handmade and therefore may vary up to 3" in overall height due to the counterbalancing nature. Specify drop length. Arm and frame lengths are fixed. Shade does not rotate. Fixed drop not adjustable on site.

Remarks continued

Not for use on sloped ceilings. Black exterior electrical cord is standard. Hardware finish consistent with frame finish. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions


Tier 1: 52.5" (133 cm)
Tier 2: 57" (145 cm)
Tier 3: 63" (160 cm)
Tier 4: 65" (165 cm)
Max. dimension: 122" L x 23" W (310 L x 58 cm W)
Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H)
Shade: 23" Ø x 4" H (58 Ø x 10 cm H)
Min. overall height: 102.5" (260 cm)



Treble Pendant

TECHNICAL SPECIFICATIONS

No. 453

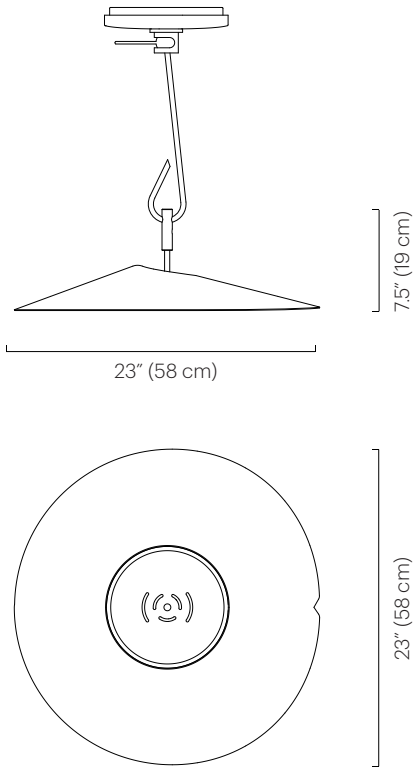

Description

The Treble Pendant has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with an acrylic diffuser. The fixture can rotate 245° from the canopy.

Materials

Shade: Powder coated aluminum
Ceiling mount: Powder coated aluminum and steel.
Frame: Plated brass
Drop: Plated brass
Lamp enclosure: Acrylic, aluminum, steel and plated brass.

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Anodized:

- Polished Black (matte gold interior)
- Polished Black (red ombre interior)

Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 1200 (equivalent to one 75W incandescent bulb)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

ELV Dimmer compatible

Voltage / Wattage

24V /12W

Weight

10 lbs (4.5 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Shade does not rotate.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.
Hardware finish consistent with frame finish.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

23" L x 23" W x 7.5" H
(58 L x 58 W x 19 cm H)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Shade: 23" Ø x 4" H
(58 Ø x 10 cm H)
Min. overall height: 16" (41 cm)

453 Treble Pendant
Black Satin + Brushed Brass



Sarus Collection


The Sarus Collection is a sculptural mobile of lean, cylindrical shapes; an arrangement of precision forms, suspended in balance and dictated by gravity.



Sarus Table Lamp

TECHNICAL SPECIFICATIONS

No. 113

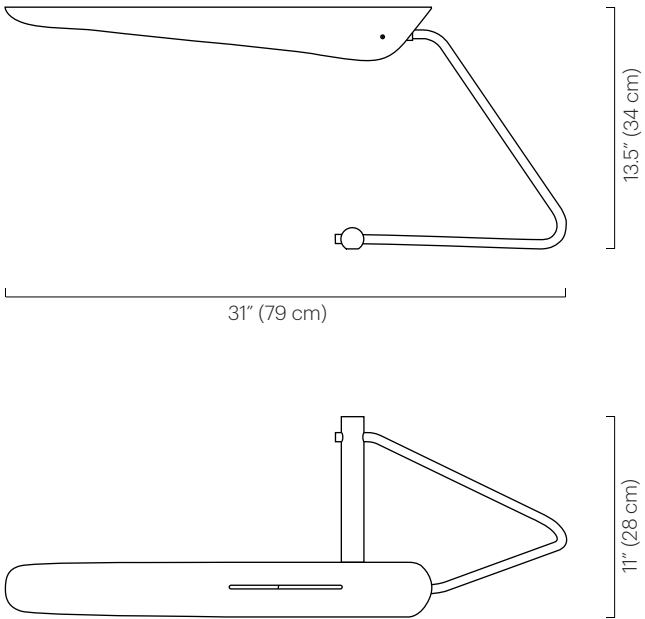

Description

The Sarus shade is mounted to a hand bent steel frame. The powder coated aluminum shade rotates 320° to cast light directionally.

Materials

Shade: Powder coated aluminum
Frame: Plated steel
Base: Powder coated steel

Base & Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: T10 tubular incandescent medium base 40W max
220-240V: E27 base (tubular 32mm recommended) 40W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

40 watts max

Weight

5 lbs (2.3 kg)

Remarks

UL listed.
On/Off switch located on cord.
Shade and base are same color.
Cord color is black; length approx. 7 feet.
Indoor use and dry locations only.

Dimensions


31" D x 11" W x 13.5" H
(79 D x 28 W x 34 cm H)
Shade: 3" Ø x 23" L
(8 Ø x 58 cm L)



Sarus Sconce - Single

TECHNICAL SPECIFICATIONS

No. 221

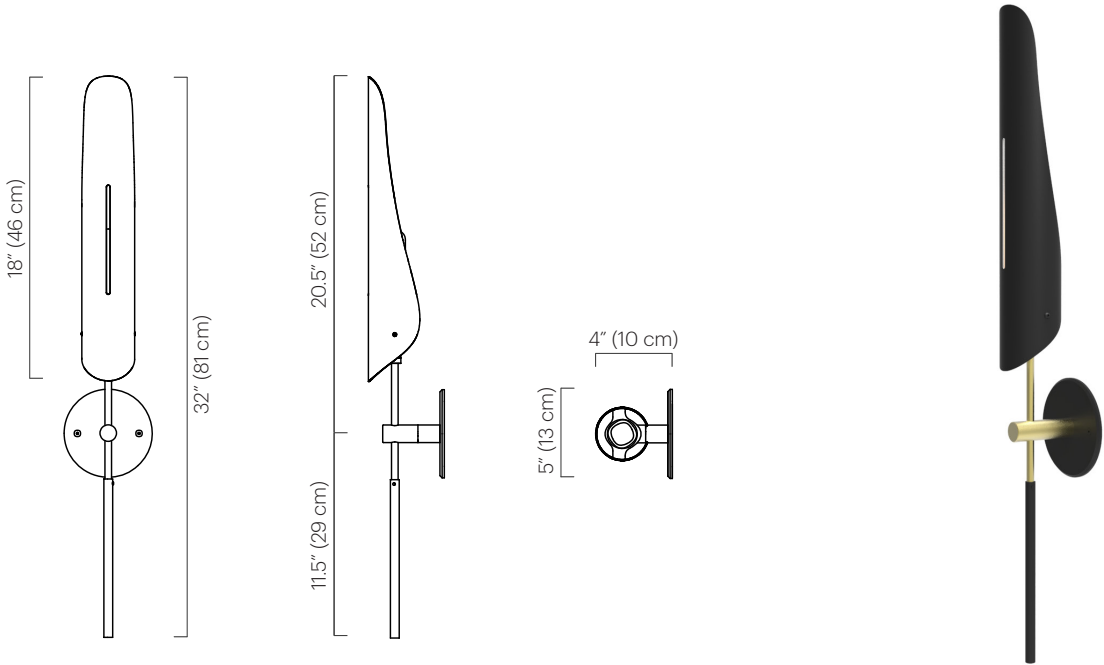

Description

The Sarus Sconce features two arms on opposing sides affixed to a powder coated steel wall mount. A single shade is balanced upright with a counterweight. The shade swivels 320° to cast light directionally.

Materials

Shade: Powder coated aluminum
Wall mount: Powder coated steel
Hardware: Plated brass
Arm: Plated steel
Counterweight: Powder coated steel

Mount & Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: T10 tubular incandescent medium base
60W max
220-240V: E27 base (tubular 32mm suggested) 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

60 watts max

Weight


5lb (2.3 kg)

Remarks

UL Listed.
Hardwired is standard.
Indoor use and dry locations only.
Wall mount consistent with shade color.
Counterweights are black.
ADA compliant.

Dimensions


Single: 4" D x 5" W x 32" H
(10 D x 13 W x 81 cm H)
Wall mount diameter: 5" (13 cm)
Shade: 18" L x 3" Ø
(46 L x 8 Ø cm)

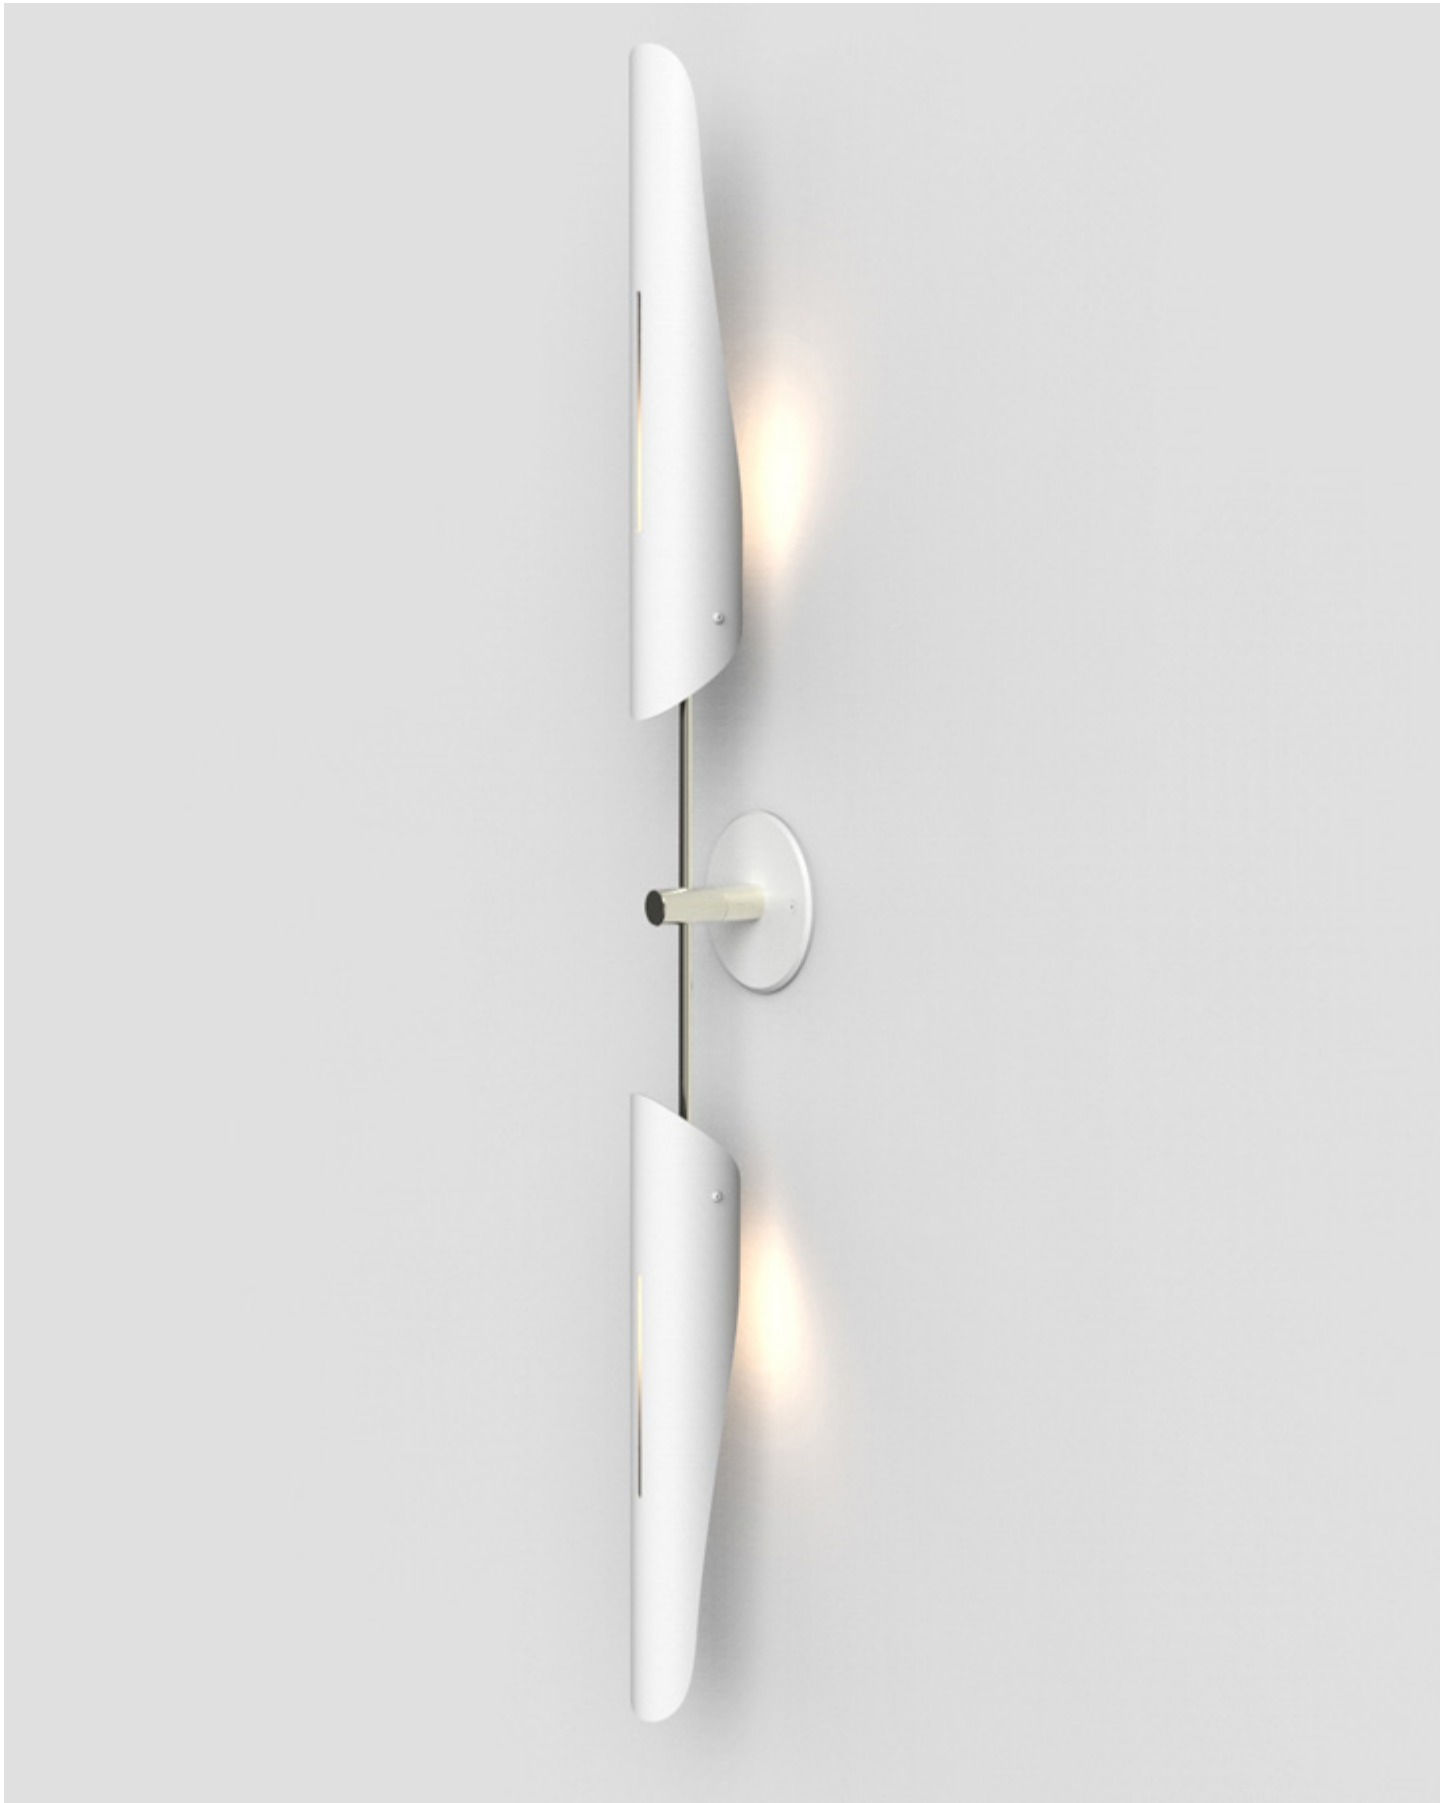

Sarus Sconce - Double

TECHNICAL SPECIFICATIONS

No. 223

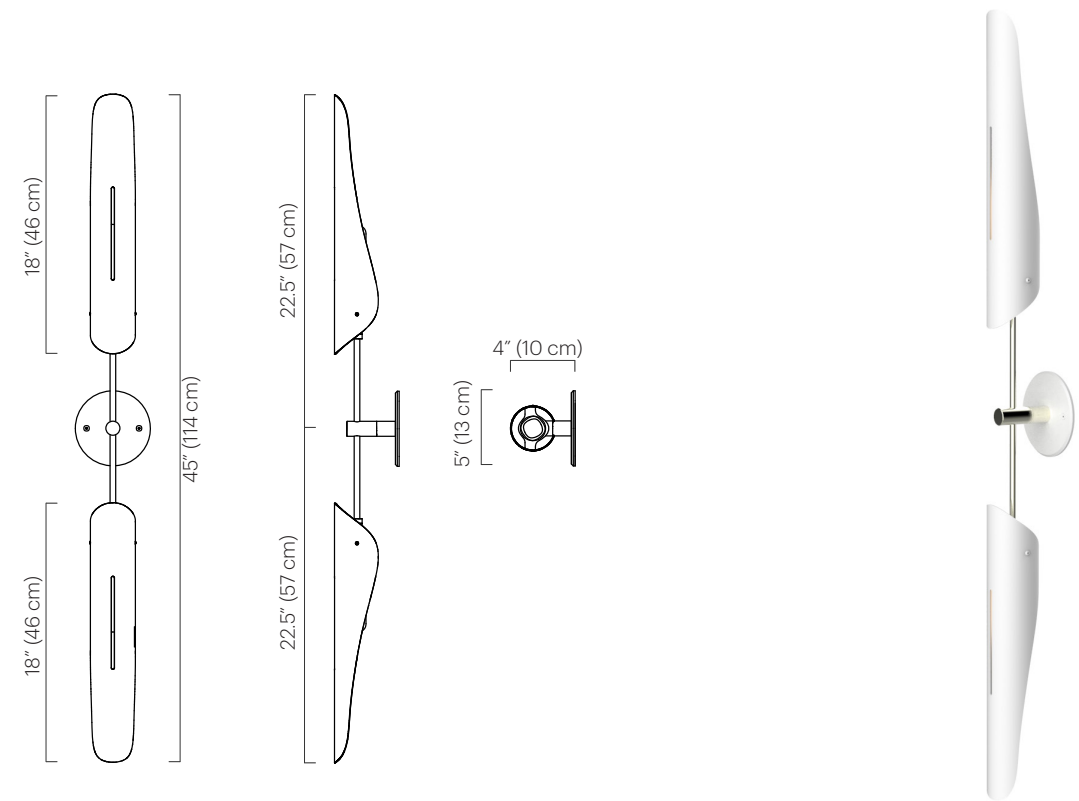

Description

The Sarus Sconce features two arms on opposing sides affixed to a powder coated steel wall mount. The shades swivel 320° to cast light directionally.

Materials

Shade: Powder coated aluminum
Wall mount: Powder coated steel
Hardware: Plated brass
Arm: Plated steel
Counterweight: Powder coated steel

Mount & Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: (2) T10 tubular incandescent medium base
60W max
220-240V: (2) E27 base (tubular 32mm suggested) 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

120 watts max

Weight

5lb (2.3 kg)

Remarks

UL Listed.
Hardwired is standard.
Indoor use and dry locations only.
Wall mount consistent with shade color.
Counterweights are black.
ADA compliant.

Dimensions

4" D x 5" W x 45" H
(10 D x 13 W x 114 cm H)
Wall mount diameter: 5" (13 cm)
Shade: 18" L x 3" Ø
(46 L x 8 Ø cm)



428 Sarus Mobile 2 Tier
Custom Color


Sarus Mobile, 2 Tier

TECHNICAL SPECIFICATIONS

No. 428

 Quickship

Select finishes and colors available.

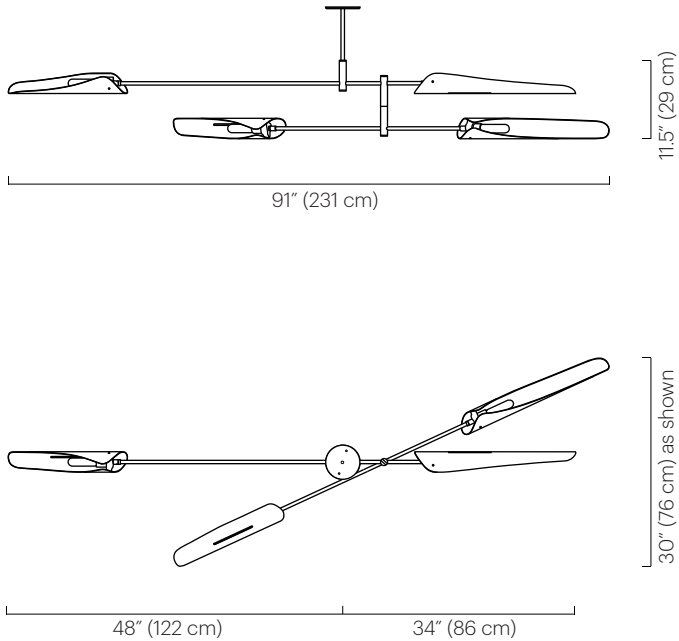

Description

The Sarus Mobile is a carefully balanced fixture, featuring two tiers of differing lengths. Each tier has one large and one small Sarus shade. Tiers scissor open when installed; arrangement is adjustable on site. Shades swivel 320° to cast light directionally.

Materials

Shades: Powder coated aluminum
Frame: Plated steel
Ceiling mount: Powder coated steel
Drop: Plated steel

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: (4)T10 tubular incandescent medium base 60W max
220-240V: (4)E27 base (tubular 32mm suggested) 60W max
Note: Bulbs not included. Halogen bulbs not recommended.

Wattage

240 watts max

Weight

15 lbs (6.8 kg)

Remarks

Specify drop length. Fixed drop not adjustable on site. Tier lengths cannot be customized. Each tier has two shades. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions

Tier 1: 82" (208 cm)
Tier 2: 69" (175 cm)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height: 12.5" (32 cm)
Large Shade: 23" L x 3" Ø (58 L x 8 Ø cm)
Small Shade: 18" L x 3" Ø (46 L x 8 Ø cm)




Sarus Mobile, 3 Tier

TECHNICAL SPECIFICATIONS

No. 428



Select finishes and colors available.

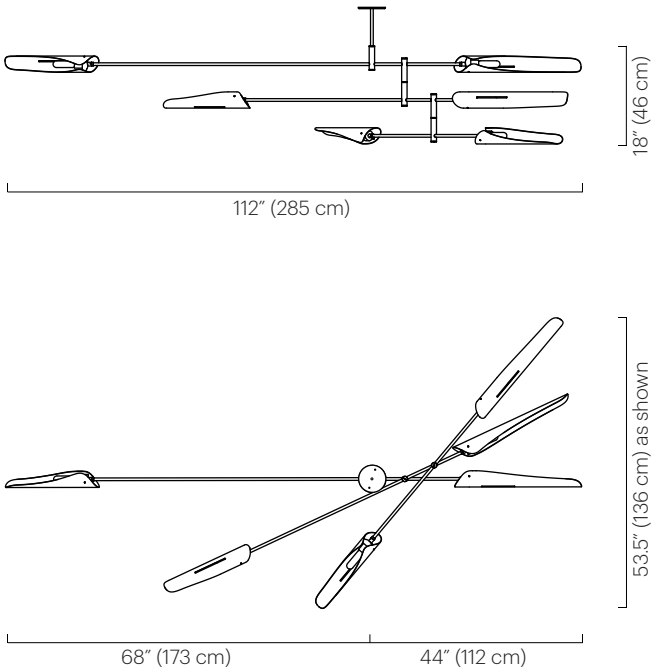

Description

The Sarus Mobile is a carefully balanced fixture, featuring three tiers of differing lengths. Each tier has one large and one small Sarus shade. Tiers scissor open when installed; arrangement is adjustable on site. Shades swivel 320° to cast light directionally.

Materials

Shades: Powder coated aluminum
Frame: Plated steel
Ceiling mount: Powder coated steel
Drop: Plated steel

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: (6)T10 tubular incandescent medium base 60W max
220-240-V: (6)E27 base (tubular 32mm suggested) 60W max
Note: Bulbs not included. Halogen bulbs not recommended.

Wattage

360 watts max

Weight

25 lbs (11.3 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Tier lengths cannot be customized.
Due to the length of tiers, a natural arc occurs on the longest tier.

Remarks continued

Each tier has two shades.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

Tier 1: 112" (285 cm)
Tier 2: 82" (208 cm)
Tier 3: 69" (175 cm)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height: 19" (48 cm)
Large Shade: 23" L x 3" Ø (58 L x 8 Ø cm)
Small Shade: 18" L x 3" Ø (46 L x 8 Ø cm)


428 Sarus Mobile 3 Tier
Black Satin + Polished Nickel + Custom Canopy



Sarus Mobile, 4 Tier

TECHNICAL SPECIFICATIONS

No. 428

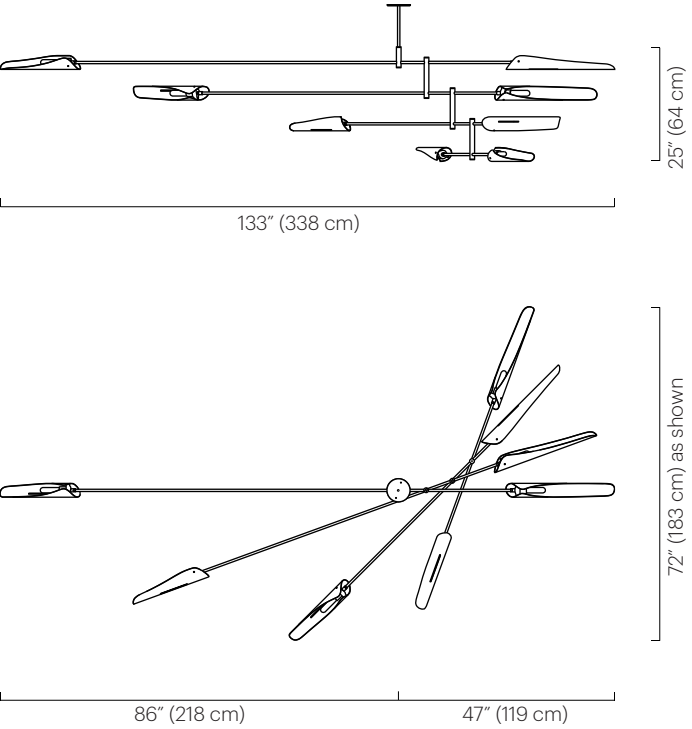

Description

The Sarus Mobile is a carefully balanced fixture, featuring four tiers of differing lengths. Each tier has one large and one small Sarus shade. Tiers scissor open when installed; arrangement is adjustable on site. Shades swivel 320° to cast light directionally.

Materials

Shades: Powder coated aluminum
Frame: Plated steel
Ceiling mount: Powder coated steel
Drop: Plated steel

Mount & Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: (8)T10 tubular incandescent medium base 60W max
220-240V: (8)E27 base (tubular 32mm suggested) 60W max
Note: Bulbs not included. Halogen bulbs not recommended.

Wattage

480 watts max

Weight

35 lbs (15.8 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Tier lengths cannot be customized.
Due to the length of tiers, a natural arc occurs on the two longest tiers.

Remarks continued

Each tier has two shades.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions


Tier 1: 133" (338 cm)
Tier 2: 112" (285 cm)
Tier 3: 82" (208 cm)
Tier 4: 69" (175 cm)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height: 26" (66 cm)
Large Shade: 23" L x 3" Ø (58 L x 8 Ø cm)
Small Shade: 18" L x 3" Ø (46 L x 8 Ø cm)

428 Sarus Mobile 4 Tier
Black Satin + Polished Nickel



Torroja Collection



Inspired by the architecture of Spanish engineer Eduard Torroja, this Collection features organic sculptural forms, balanced on an asymmetrical axis allowing for subtle movement.

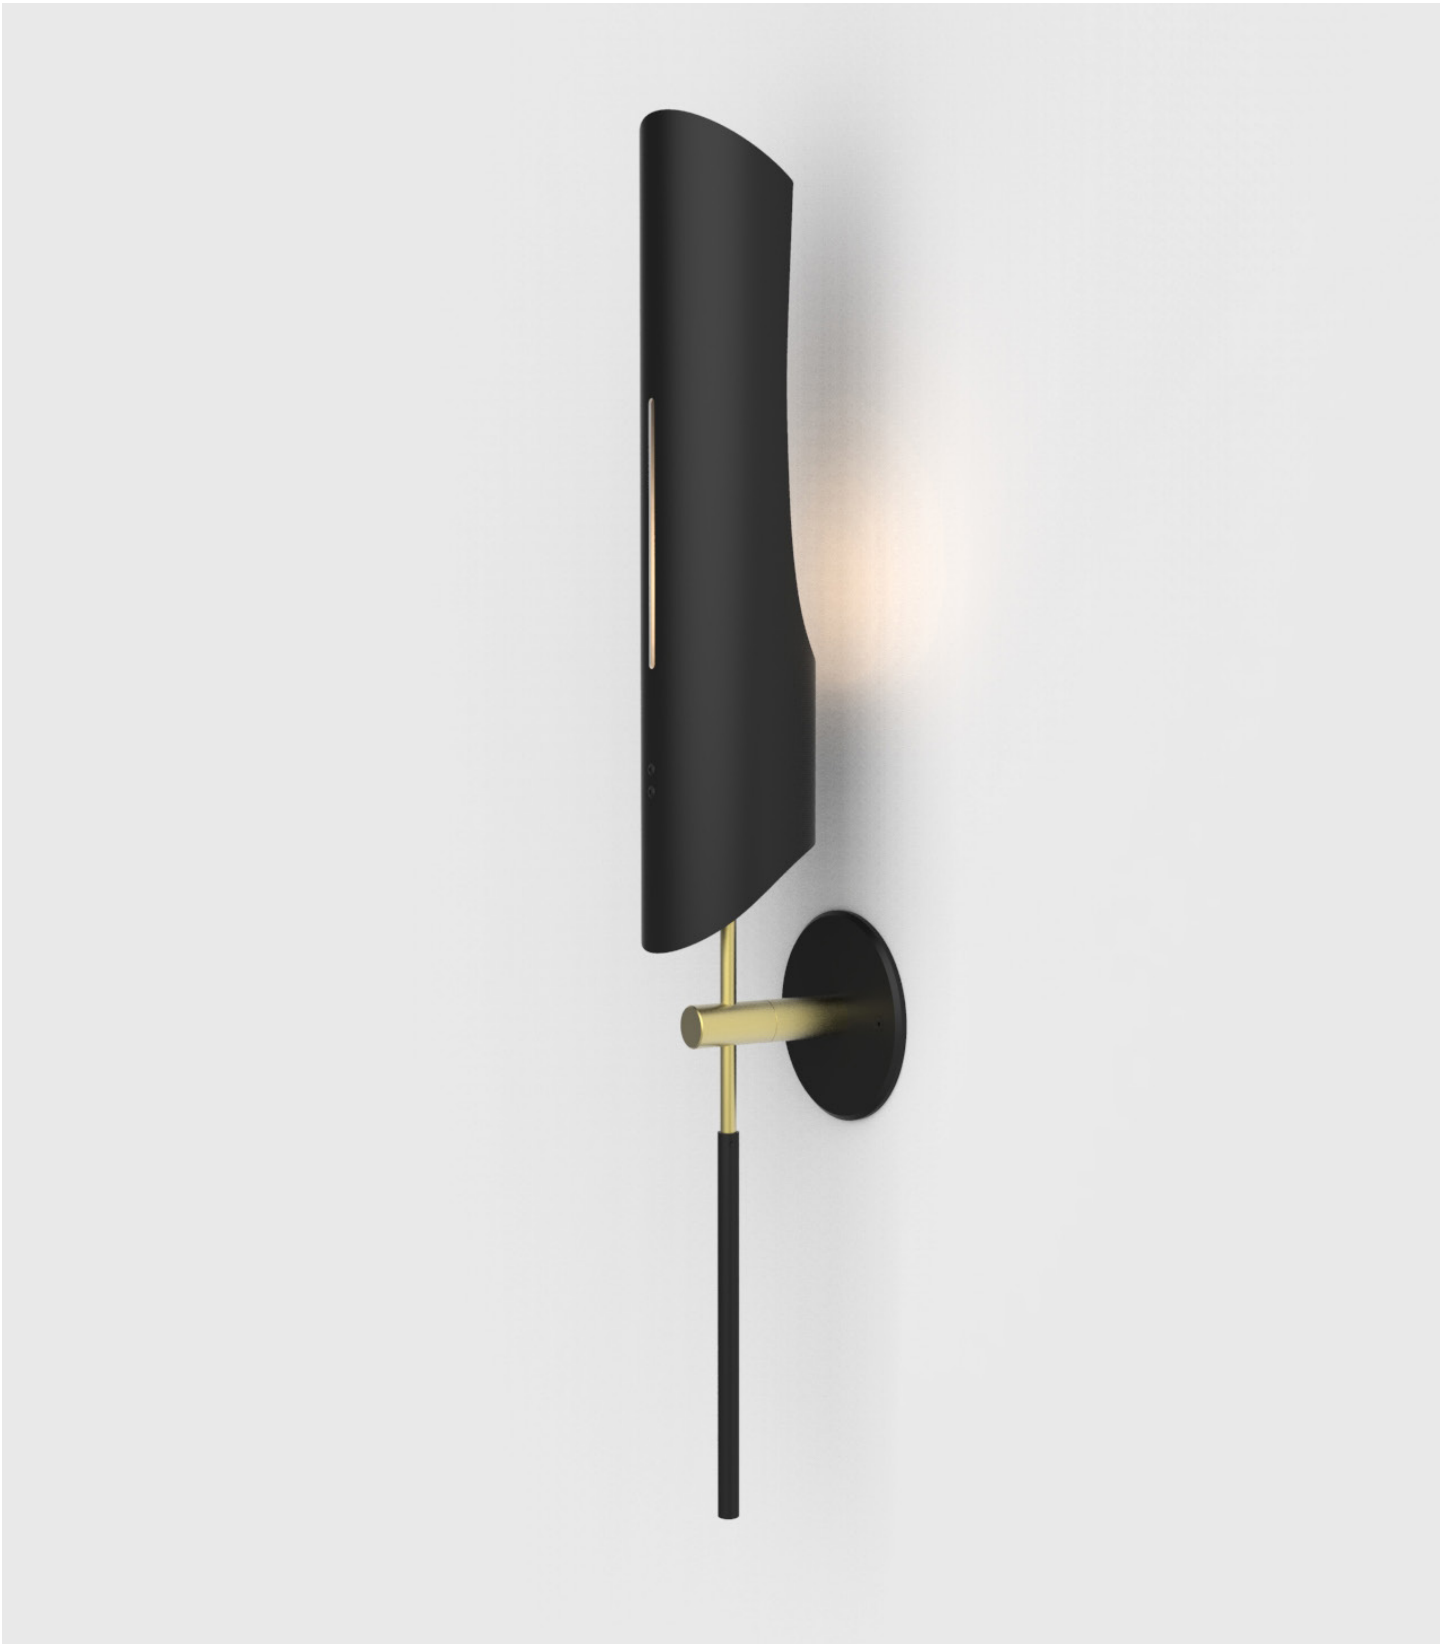

Torroja Sconce - Single

TECHNICAL SPECIFICATIONS

No. 222

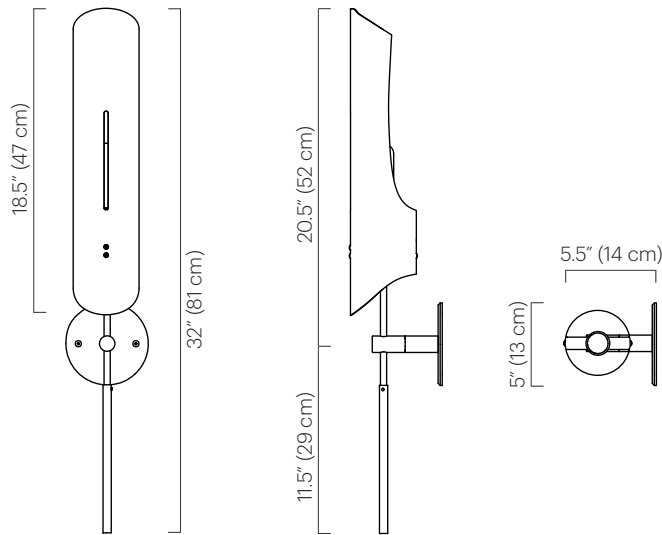

Description

The Torroja Sconce features two arms on opposing sides affixed to a powder coated steel wall mount. A single shade is balanced upright with a counterweight. The shade swivels 320° to cast light directionally.

Materials

Shade: Powder coated aluminum
Wall mount: Powder coated steel
Hardware: Plated brass
Arm: Plated steel
Counterweight: Powder coated steel

Mount & Shade Color

- Black Satin (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: T10 tubular incandescent medium base
60W max
220-240V: E27 base (tubular 32mm suggested) 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

60 watts max

Weight

7lb (3.2 kg)

Remarks

UL Listed.
Hardwired is standard.
Indoor use and dry locations only.
Wall mount consistent with shade color.
Counterweights are black.

Dimensions


5.5" D x 5" W x 32" H
(14 D x 13 W x 81 cm H)
Wall mount diameter: 5" (13 cm)
Shade: 4" Ø x 18.5" L
(10 Ø x 47 cm L)



Torroja Sconce - Double

TECHNICAL SPECIFICATIONS

No. 224

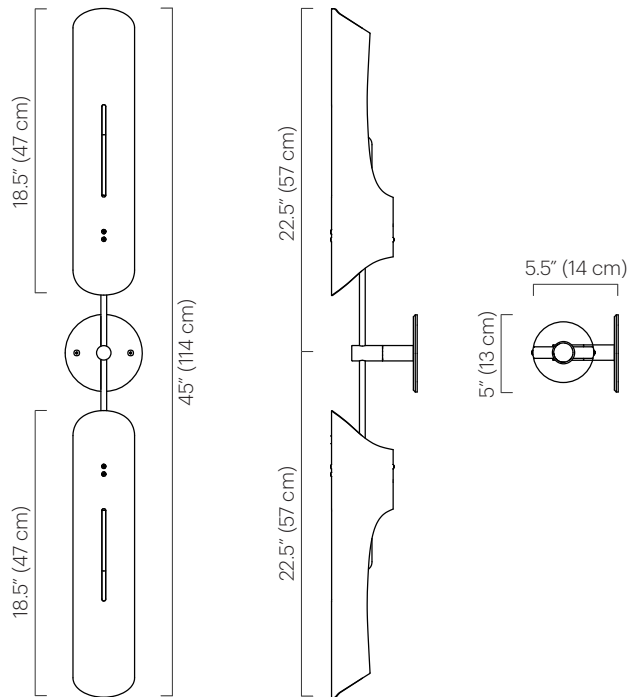

Description

The Torroja Sconce features two arms on opposing sides affixed to a powder coated steel wall mount. The shades swivel 320° to cast light directionally.

Materials

Shade: Powder coated aluminum
Wall mount: Powder coated steel
Hardware: Plated brass
Arm: Plated steel
Counterweight: Powder coated steel

Mount & Shade Color

- Black Satin (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

120V: (2) T10 tubular incandescent medium base
60W max
220-240V: (2) E27 base (tubular 32mm suggested) 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

120 watts max

Weight

7lb (3.2 kg)

Remarks

UL Listed.
Hardwired is standard.
Indoor use and dry locations only.
Wall mount consistent with shade color.
Counterweights are black.

Dimensions


5.5" D x 5" W x 45" H
(14 D x 13 W x 114 cm H)
Wall mount diameter: 5" (13 cm)
Shade: 4" Ø x 18.5" L
(10 Ø x 47 cm L)



Torroja Standing Lamp

TECHNICAL SPECIFICATIONS

No. 309

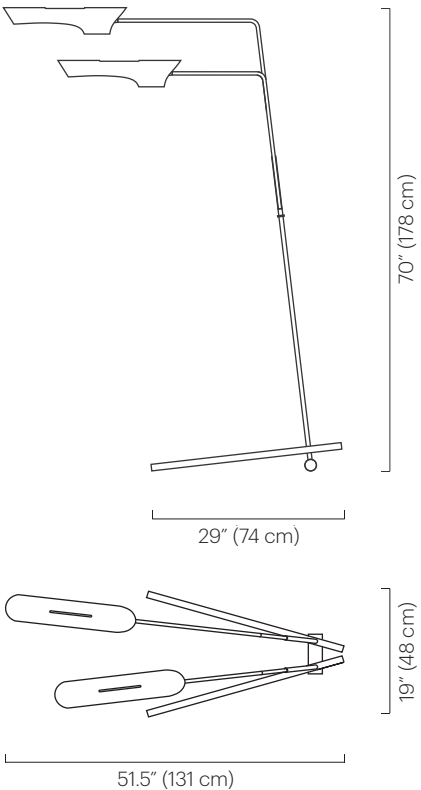

Description

The Torroja Standing Lamp features a plated steel frame with two arms that extend over the base. Powder coated aluminum shades rotate 320° to cast light directionally.

Materials

Shades: Powder coated aluminum
Frame: Plated steel

Shade Color

- Black Satin (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel

Lamping

120V: (2)T10 tubular incandescent bulbs medium base 40W max
220-240V: (2)E27 base (tubular 32mm suggested) 40W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

80 watts max

Weight

30 lbs (13.6 kg)

Remarks

UL listed.
Dimmer switch located on cord.
Arm height is not adjustable.
Cord color is black; length approx. 10 feet.
Indoor use and dry locations only.

Dimensions

Base: 19" W x 29" D
(48 W x 74 cm D)
70" H x 51.5" D
(178 H x 131 cm D)
Shade: 4" Ø x 18.5" L
(10 Ø x 47 cm L)



309 Torroja Standing Lamp
White Satin + Polished Nickel



Torroja Tiered Pendant, 2 Tier

TECHNICAL SPECIFICATIONS

No. 425

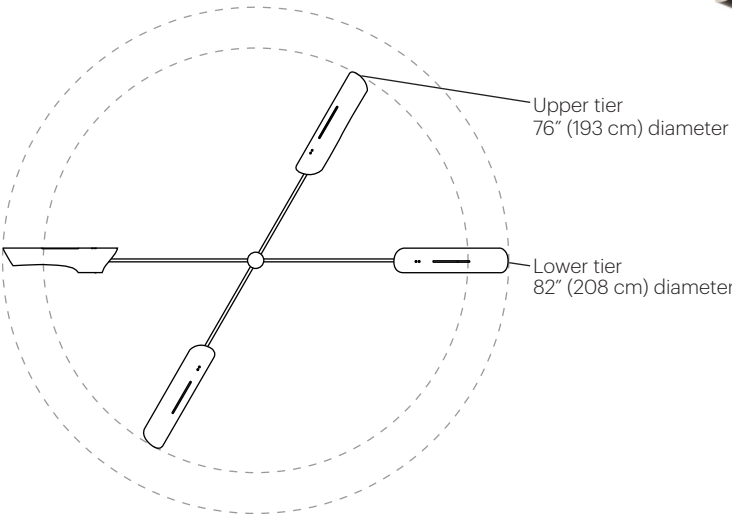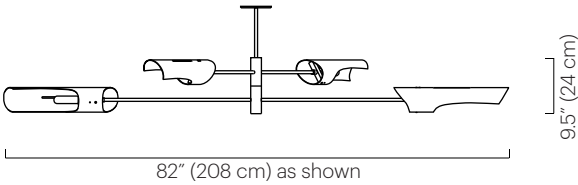

Description

The Torroja Tiered Pendant features a plated frame customizable by the number and length of the tiers. Each tier consists of two shades. Tiers scissor open and are adjustable on site. Shades rotate 320° to cast light directionally.

Materials

Shades: Powder coated aluminum
Frame: Plated steel
Ceiling mount: Powder coated steel
Drop: Plated steel

Shade Color

- Black Satin (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping (Two shades per tier)

120V: (2)T10 tubular incandescent medium base 60W max
220-240V: (2)E27 base (tubular 32mm suggested) 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

120 watts max per tier

Weight

13 lbs (6 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Each tier has two shades.
Specify tier lengths.
Ceiling mount consistent with shade color.

Remarks continued

Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

Standard tier diameters:
52" / 65" / 76" / 82"
(132 cm / 165 cm / 193 cm / 208 cm)
or specify custom tier diameters.
Min. length of tier: 48" (122 cm)
Max. length of tier: 120" (305 cm)
Shade: 4" Ø x 18.5" L
(10 Ø x 47 cm L)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height:
11" (28 cm)



425 Torroja Tiered Pendant 3 Tier
Black Satin + Polished Nickel



Torroja Tiered Pendant, 3 Tier

TECHNICAL SPECIFICATIONS

No. 425

 Quickship

Select finishes and colors available.

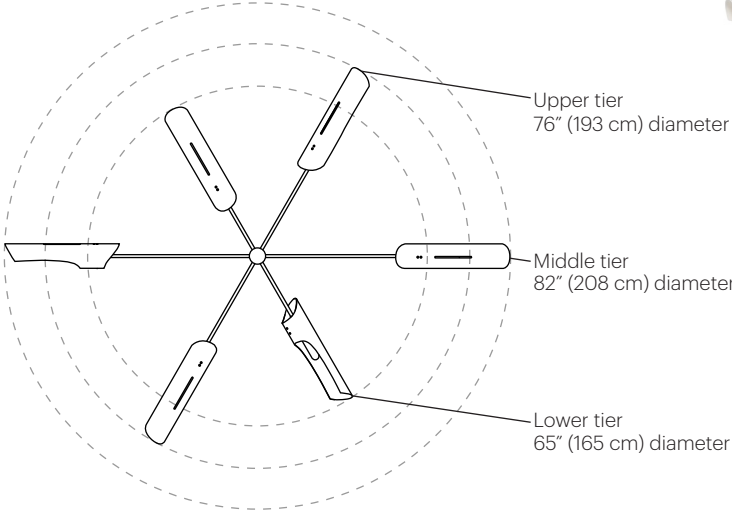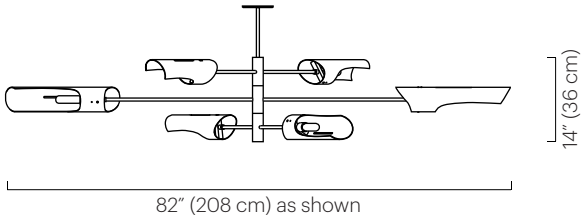

Description

The Torroja Tiered Pendant features a plated frame customizable by the number and length of the tiers. Each tier consists of two shades. Tiers scissor open and are adjustable on site. Shades rotate 320° to cast light directionally.

Materials

Shades: Powder coated aluminum
Frame: Plated steel
Ceiling mount: Powder coated steel
Drop: Plated steel

Shade Color

- Black Satin (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping (Two shades per tier)

120V: (2)T10 tubular incandescent medium base 60W max
220-240V: (2)E27 base (tubular 32mm suggested) 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

120 watts max per tier

Weight

18 lbs (8 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Each tier has two shades.
Specify tier lengths.
Ceiling mount consistent with shade color.

Remarks continued

Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions


Standard tier diameters:
52" / 65" / 76" / 82"
(132 cm / 165 cm / 193 cm / 208 cm)
or specify custom tier diameters.
Min. length of tier: 48" (122 cm)
Max. length of tier: 120" (305 cm)
Shade: 4" Ø x 18.5" L
(10 Ø x 47 cm L)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height: 15.5" (39 cm)



Torroja Tiered Mobile

TECHNICAL SPECIFICATIONS

No. 429

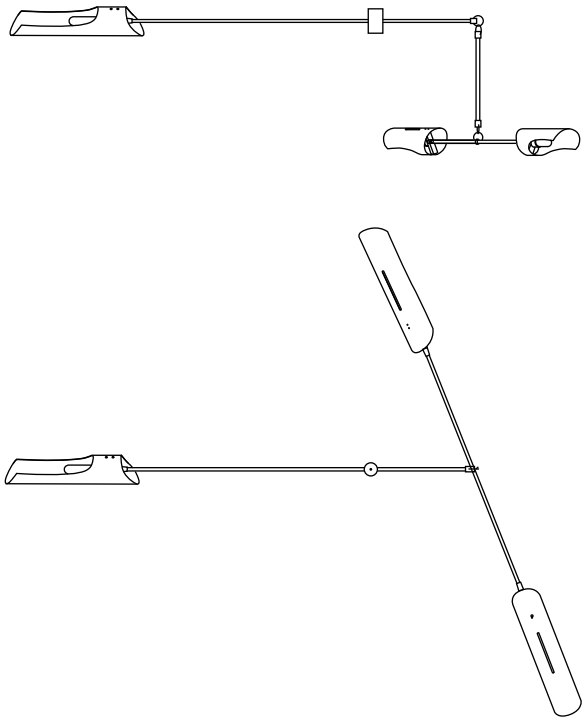

Single tier shown above



Shown above with three tiers

Description

The Torroja Tiered Mobile is a totally customizable fixture. The quantity and size of the tiers can be specified for site conditions. Each tier is comprised of three segments, with three shades that balance on an asymmetrical axis that allows gentle movement. Torroja shades rotate 320° to cast light directionally.

Materials

Shades: Powder coated aluminum
Ceiling mount: Powder coated steel
Frame: Plated steel
Hub: Plated aluminum (for nickel finish) or brass (for brass finish)
Drop: Stainless steel cable

Shade Color

- Black Satin (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping (Three shades per tier)

120V: (3)T10 tubular incandescent medium base 60W max
220-240V: (3)E27 base (tubular 32mm suggested) 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

IMPORTANT: Identical bulbs must be used in each socket in order for fixture to properly balance.

Wattage

180 watts max per tier

Weight

Weight varies; depending on number of tiers and dimensions.
Each tier: approx. 8-10 lbs (3.6-4.5 kg)

Remarks

Specify drop length.
Approx. 6" of extra cable and cord included.
Specify number of tiers.
Two tier minimum (six shades).
Each tier has three shades.
Specify tier diameter.
Ceiling mount consistent with shade color.
White electrical cord is standard.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

Fixture custom made based on client specifications.
Minimum diameter: 60" (152 cm)
Maximum diameter: 120" (305 cm)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height:
Two tiers: 24" (61 cm)
Three tiers: 31" (79 cm)
Shade: 4" Ø x 18.5" L (10 Ø x 47 cm L)

429 Torroja Tiered Mobile 3 Tier
White Satin + Polished Nickel




Bottle + Bullet Collection

Iconic shades elegantly re-arranged. The Bottle + Bullet Series, our first collections, reveal the unexpected in the familiar—distilling once-known forms in a new expression.

Bullet Table Lamp

TECHNICAL SPECIFICATIONS

No. 109

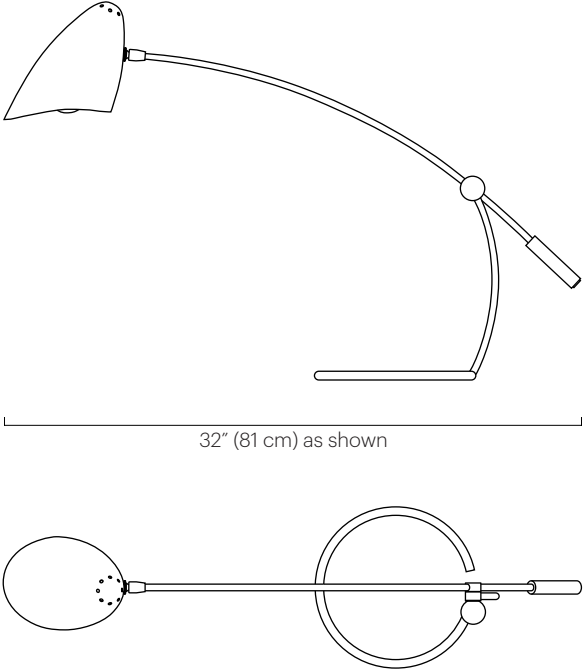

<p>Description</p> <p>The Bullet Desk Lamp features a counterweighted arm that adjusts up and down to desired height. The handspun aluminum shade rotates 320 degrees to cast light directionally. May be ordered with Bullet or Bottle shades.</p> <p>Materials</p> <p>Shade: Powder coated aluminum Frame: Plated steel Counterweight: Power coated steel</p>	<p>Shade Color Bullet</p> <ul style="list-style-type: none">● Black Satin (ivory satin interior)● Ivory Satin (ivory satin interior)○ White Satin (white satin interior) <p>Shade Color Bottle</p> <ul style="list-style-type: none">● Black Satin (ivory satin interior)● Grey Gloss (ivory satin interior)● Ivory Satin (ivory satin interior)○ White Satin (white satin interior) <p>Custom colors available.</p> <p>Finish</p> <ul style="list-style-type: none">● Polished Nickel● Brushed Brass <p>Custom finishes available.</p>	<p>Lamping</p> <p>120V: A19 or A15 medium base 40W max 220-240V: E27 base 40W max Note: Bulbs not included. Halogen bulbs not recommended.</p> <p>Wattage</p> <p>40 watts max</p> <p>Weight</p> <p>5 lbs (2.3 kg)</p> <p>Remarks</p> <p>UL listed. Bullet shade: On/Off switch located on cord. Bottle shade 120V: On/Off switch located on shade and cord. 220-240V: On/Off switch located on cord.</p>	<p>Remarks Continued</p> <p>Cord color is black; length approx. 7 feet. Counterweight and arm adjustment are always black. Indoor use and dry locations only.</p> <p>Dimensions</p> <p>Base: 9" Ø (23 cm) Height variable. Adjusts up to 36.5" H (93 cm) Bullet Shade: 9" H x 6" W x 6.5" D (23 H x 15 W x 17 cm D) Bottle Shade: 8.5" H x 5.5" W 8.5" D (22 H x 14 W x 22 cm D)</p>
---	--	--	--

109 Bullet Table Lamp
Black Satin + Brushed Brass






One Arm Sconce

TECHNICAL SPECIFICATIONS

No. 202



Select finishes and colors available.

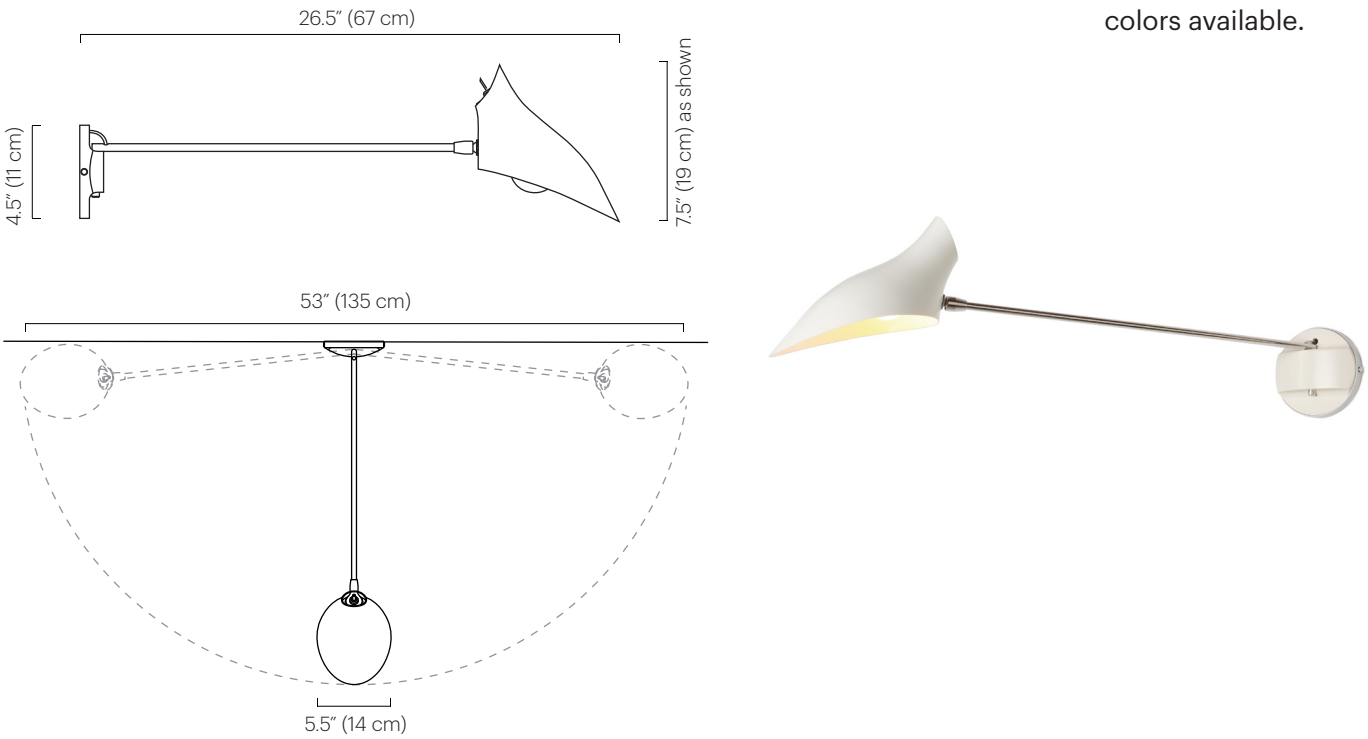

<p>Description</p> <p>The One Arm Sconce features a single arm affixed to a solid wood wall mount and steel mounting ring. The arm swings from side to side with a handspun aluminum Bottle shade. The shade rotates 320° to cast light directionally.</p>	<p>Shade Color</p> <ul style="list-style-type: none">● Black Satin (ivory satin interior)● Grey Gloss (ivory satin interior)● Ivory Satin (ivory satin interior)○ White Satin (white satin interior) <p>Custom colors available.</p>	<p>Wall Mount</p> <p>(matches specified shade)</p> <ul style="list-style-type: none">● Black Satin: Opaque paint on maple● Grey Gloss: Opaque paint on maple● Ivory Satin: Opaque paint on maple <p>Also available:</p> <ul style="list-style-type: none">● Natural Walnut (clear finish)● Natural Maple (clear finish)	<p>Remarks</p> <p>UL listed. Hardwired is standard. Custom cord & plug available; length approx 6'. Cord color is black. 120V: Switch is on shade. 220-240V: Hardwired to wall; no switch on shade. Custom arm length available (36" max). Mounting ring matches arm finish. Walnut and maple wood mounts will vary in color from fixture to fixture. Indoor use and dry locations only.</p>
<p>Materials</p> <p>Shade: Powder coated aluminum Wall Mount: Finished wood Arm: Plated steel Mounting Ring: Plated steel</p>	<p>Finish</p> <ul style="list-style-type: none">● Polished Nickel● Brushed Brass <p>Custom finishes available.</p>	<p>Lamping</p> <p>120V: A19 or A15 medium base 60W max 220-240V: E14 base golf ball 60W max Note: Bulbs not included. Halogen bulbs not recommended.</p>	<p>Dimensions</p> <p>Arm Length: 26.5" (67 cm) Wingspan: 53" (135 cm) Wall mount diameter: 4.5" (11 cm) Shade: 8.5" H x 5.5" W 8.5" D (22 H x 14 W x 22 cm D)</p>
	<p>Weight</p> <p>5 lbs (2.3 kg)</p>	<p>Wattage</p> <p>60 watts max</p>	

202 One Arm Sconce
Black Satin + Polished Nickel



203 Two Arm Sconce
White Satin + Polished Nickel


Two Arm Sconce

TECHNICAL SPECIFICATIONS

No. 203



Select finishes and colors available.

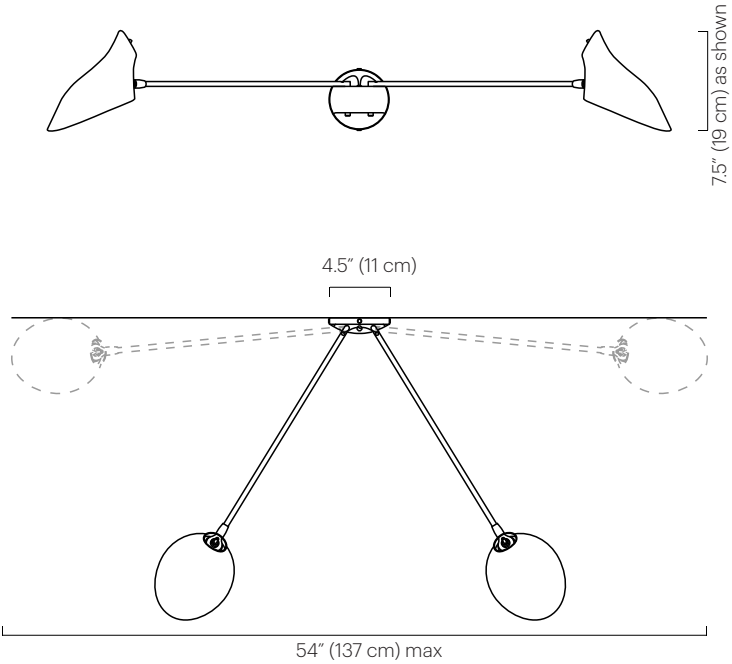

Description

The Two Arm Sconce features dual arms affixed to a solid wood wall mount and steel mounting ring. The arms swing from side to side with handspun aluminum Bottle shades. The shades rotate 320° to cast light directionally.

Materials

Shade: Powder coated aluminum
Wall Mount: Finished wood
Arm: Plated steel
Mounting Ring: Plated steel

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

Weight

5 lbs (2.3 kg)

Wall Mount

(matches specified shade)
● Black Satin: Opaque paint on maple
● Grey Gloss: Opaque paint on maple
● Ivory Satin: Opaque paint on maple

Also available:

- Natural Walnut (clear finish)
- Natural Maple (clear finish)

Lamping

120V: (2)A19 or A15 medium base 60W max
220-240V: (2)E14 base golf ball 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

120 watts max

Remarks

UL listed.
Hardwired is standard.
Custom cord & plug available; length approx 6'.
Cord color is black.
120V: Switch is on shade.
220-240V: Hardwired to wall; no switch on shade.
Custom arm length available (36" max).
Mounting ring matches arm finish.
Walnut and maple wood mounts will vary in color from fixture to fixture.
Indoor use and dry locations only.

Dimensions


Arm Length: 26.5" (67 cm)
Wingspan: 54" (137 cm)
Wall mount diameter: 4.5" (11 cm)
Shade: 8.5" H x 5.5" W 8.5" D (22 H x 14 W x 22 cm D)



Tripod

TECHNICAL SPECIFICATIONS

No. 303

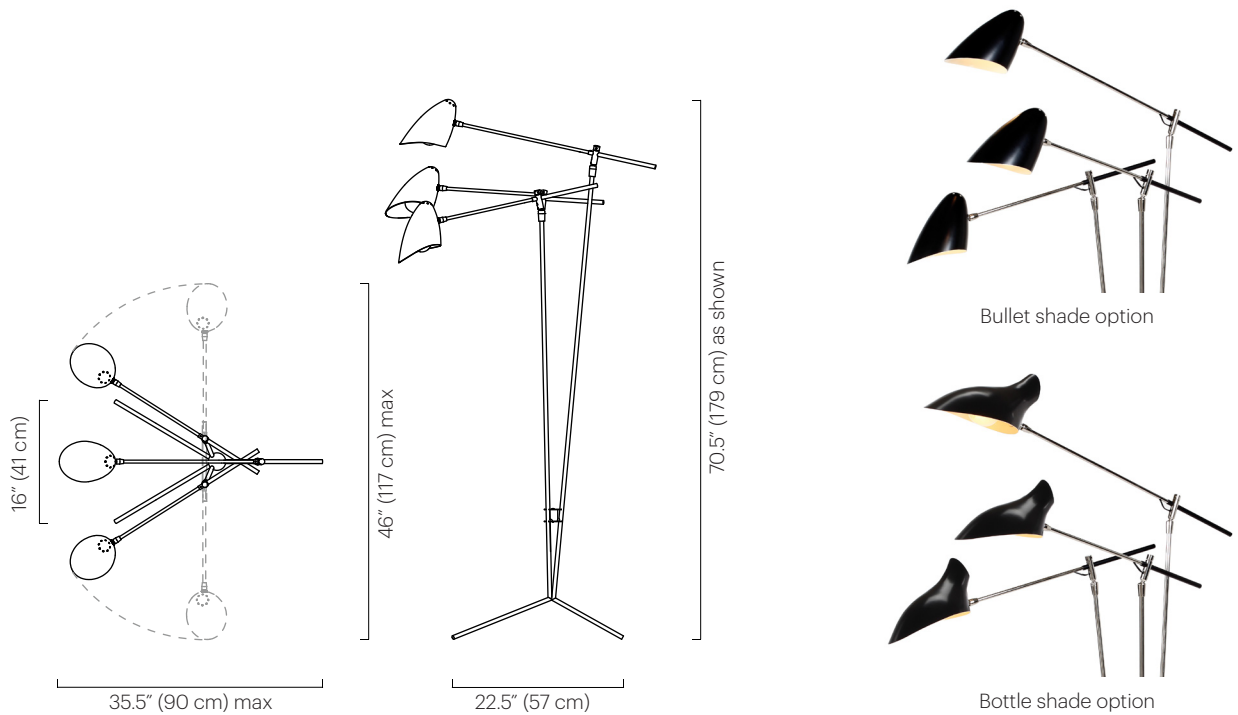

Description

The Tripod features three counterweighted arms that adjust up and down and swivel side to side. Handspun shades on each arm rotate 320° to cast light directionally. May be ordered with Bullet or Bottle shades.

Materials

Shades: Powder coated aluminum
Frame: Plated steel
Counterweight: Powder coated steel

Shade Color Bullet

- Black Satin (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Shade Color Bottle

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

Lamping

120V: (3)A19 or A15 medium base 60W max
220-240V:
Bullet: (3)E27 base 60W max
Bottle: (3)E14 base 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

180 watts max

Weight

15 lbs (6.8 kg)

Remarks

Not UL listed.
Bullet shade: On/Off dimmer switch on cord.
Bottle shade:
120V: On/Off switch on shade, dimmer on cord.
220-240V: On/Off dimmer switch on cord.

Remarks Continued

Cord color is black; length approx. 10 feet.
Counterweight is black.
Indoor use and dry locations only.


Dimensions

22.5" D x 16" W x 65" H
(57 D x 41 W x 165cm H)
Max depth: 35.5" (90 cm)
Shade height variable:
Min height: 42" (107 cm)
Max height: 78" (198 cm)
Wingspan: 46" (117 cm)
Bullet Shade: 9" H x 6" W x 6.5" D
(23 H x 15 W x 17 cm D)
Bottle Shade: 8.5" H x 6" W 8.5" D
(22 H x 15 W x 22 cm D)

Doublepod

TECHNICAL SPECIFICATIONS

No. 305

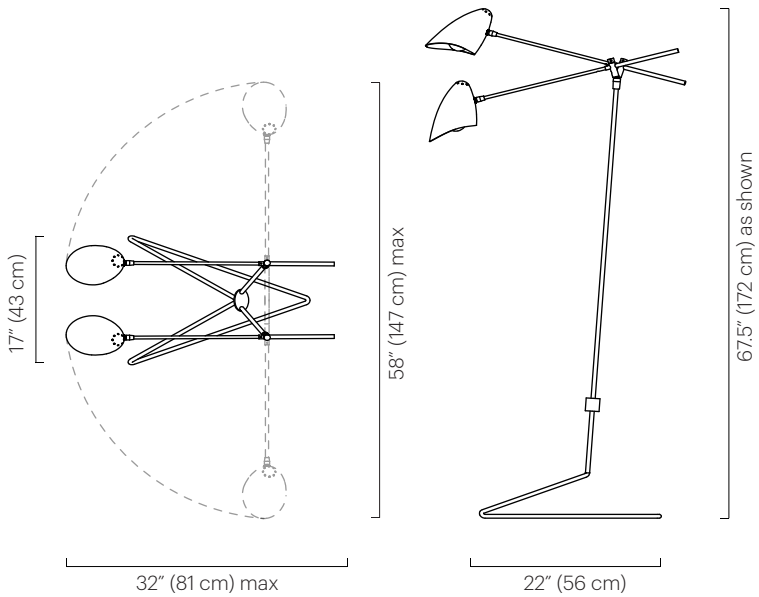

Bullet shade option



Bottle shade option

Description

The Doublepod is a standing lamp that features two counter-weighted arms that adjust up and down and swivel side to side. Handspun shades rotate 320° to cast light directionally. May be ordered with Bullet or Bottle shades.

Materials

Shades: Powder coated aluminum
Frame: Plated steel
Counterweight: Powder coated steel

Shade Color Bullet

- Black Satin (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Shade Color Bottle

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

Lamping

120V: (2)A19 or A15 medium base 60W max
220-240V:
Bullet: (2)E27 base 60W max
Bottle: (2)E14 base 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

120 watts max

Weight

15 lbs (7 kg)

Remarks

Not UL listed.
Bullet shade: On/Off: dimmer switch on cord.
Bottle shade:
120V: On/Off switch on shade, dimmer on cord.
220-240V: On/Off dimmer switch on cord.

Remarks Continued

Cord color is black; length approx. 10 feet. Counterweight is black. Indoor use and dry locations only.

Dimensions

22" D x 17" W x 61" H
(56 D x 43 W x 155cm H)
Max depth: 32" (81 cm)
Shade height variable:
Min height: 45" (114 cm)
Max height: 72" (183 cm)
Wingspan: 58" (147 cm)
Bullet Shade: 9" H x 6" W x 6.5" D
(23 H x 15 W x 17 cm D)
Bottle Shade: 8.5" H x 6" W 8.5" D
(22 H x 15 W x 22 cm D)






405 Bottle Tiered Mobile 5 Tier
Black Satin + Brushed Brass

Bottle Tiered Mobile

TECHNICAL SPECIFICATIONS

No. 405

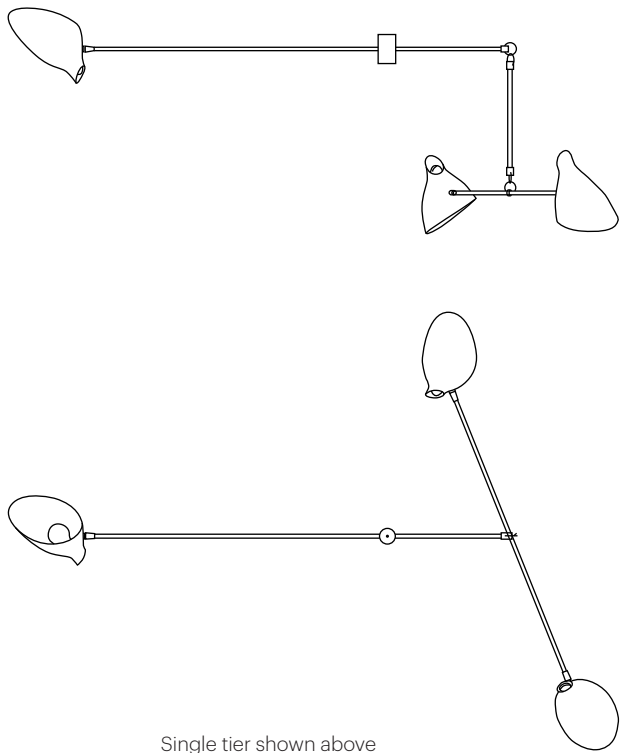

Description

The Bottle Tiered Mobile is a totally customizable fixture. The quantity and size of the tiers can be specified for site conditions. Each tier is comprised of three segments, with three shades that balance on an asymmetrical axis that allows gentle movement. Large bottle shades rotate 320° to cast light directionally.

Materials

Shades: Powder coated aluminum
Ceiling mount: Powder coated steel
Frame: Plated steel
Hub: Plated aluminum (for nickel finish) or brass (for brass finish)
Drop: Stainless steel cable

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

Lamping (Three shades per tier)

120V: (3)A19 or A15 medium base 60W max
220-240V: (3)E27 base 60W max
Note: Bulbs not included.
Halogen bulbs not recommended.

IMPORTANT: Identical bulbs must be used in each socket in order for fixture to properly balance.

Wattage

180 watts max per tier

Weight

Weight varies; depending on number of tiers and dimensions.
Each tier: approx. 8-10 lbs (3.6-4.5 kg)

Remarks

Specify drop length.
Approx. 6" of extra cable and cord included.

Remarks continued

Specify number of tiers. Each tier has three shades. Specify tier diameter. Ceiling mount consistent with shade color. White electrical cord is standard. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions

Fixture custom made based on client specifications.
Minimum diameter: 60" (152 cm)
Maximum diameter: 120" (305 cm)
Ceiling mount diameter: 5" (13 cm)
Minimum overall height:
Single tier: 18.5" (47 cm)
Two tiers: 28" (71 cm)
Three tiers: 35" (89 cm)
Shade: 13.5" L x 7" W x 9" D (34 L x 18 W x 23 cm D)




407 Bottle Tiered Pendant
White Satin + Polished Nickel

Bottle Tiered Pendant

TECHNICAL SPECIFICATIONS

No. 407

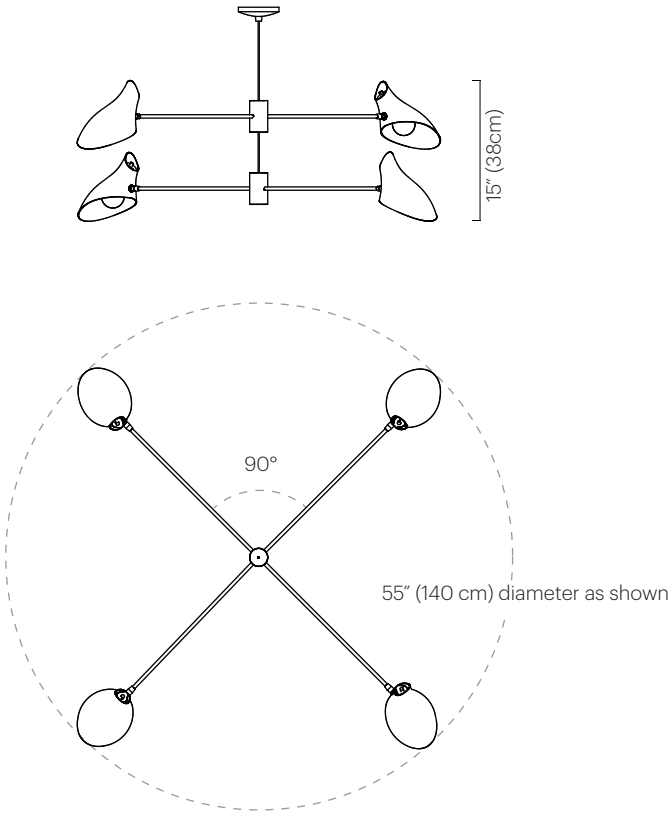

Shown above with two tiers

Description

The Bottle Tiered Pendant features a plated frame and hand spun Bottle shades that rotate 320° to cast light directionally. Customizable with longer or shorter tiers. Additional tiers can be added.

Materials

Shades: Powder coated aluminum
Ceiling Mount: Powder coated steel
Frame: Plated steel
Hub: Plated aluminum and brass
Drop: Stainless steel cable

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

Lamping (Two shades per tier)

120V: (2)A19 or A15 medium base 60W max
220-240V: (2)E27 base 60W max
Note: Bulbs not included. Halogen bulbs not recommended.

IMPORTANT: Identical bulbs must be used in each socket in order for fixture to properly balance.

Wattage

120 watts max per tier

Weight

Weight varies; depending on number of tiers and dimensions. Two-tier fixture: approx. 9 lbs (4 kg)

Remarks

Specify drop length. Approx. 6" of extra cable and cord included. Specify tier length. Specify number of tiers.

Remarks continued

Two tier minimum (Four shades). Each tier has two shades. Ceiling mount consistent with shade color. White electrical cord is standard. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions


Standard tier length: 55" x 55" (140 x 140 cm)
Tier length can be customized between 36 - 96" (91 - 244 cm)
Ceiling mount diameter: 5" (13 cm)
Standard distance between tiers: 7" (18 cm)
Minimum overall height: 15" (38 cm)
Shade: 8.5" H x 6" W 8.5" D (22 H x 15 W x 22 cm D)



Shell Collection

The Shell Series—a hand-sculpted expression of organic form. Warm, tactile, and inspired by nature, each hand-formed Shell is subtly imperfect and unique.

No. 206

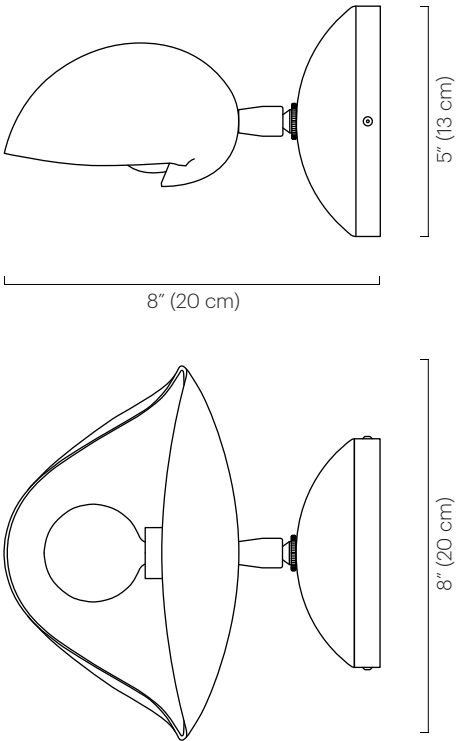

<p>Description</p> <p>Featuring a hand-formed Shell shade, the Shell Sconce rotates 320 degrees to cast light directionally.</p>	<p>Mount & Shade Color</p> <p>● Black Satin (ivory satin interior) ● Grey Gloss (grey gloss interior) ● Ivory Satin (ivory satin interior) ○ White Satin (white satin interior)</p> <p>Custom colors available.</p>	<p>Lamping</p> <p>120V: G16.5 globe bulb candelabra base 40W max 220-240V: E14 base golf ball 40W max Note: Bulbs not included. Halogen bulbs not recommended.</p>	<p>Remarks</p> <p>UL listed. Hardwired is standard. Custom cord & plug available; length approx 6'. Custom switch available on wall mount. Indoor use and dry locations only. Shade shape may vary slightly.</p>
<p>Materials</p> <p>Shade: Powder coated aluminum Wall mount: Powder coated steel Hardware: Plated brass</p>	<p>Hardware</p> <p>● Polished Nickel ● Brushed Brass</p> <p>Custom finishes available.</p>	<p>Wattage</p> <p>40 watts max</p>	<p>Dimensions</p> <p>8" D x 4.5" H x 8" W (20 D x 11 H x 20 cm W) Wall mount diameter: 5" (13 cm) Shade (approx.): 3.5" H x 9" W x 6" D (9 H x 23 x 15 cm D)</p>
	<p>Weight</p> <p>5 lb (2.3 kg)</p>		





436 Lapa Pendant + Custom Frame
White Satin + Brushed Brass

Lapa Pendant

TECHNICAL SPECIFICATIONS

No. 436

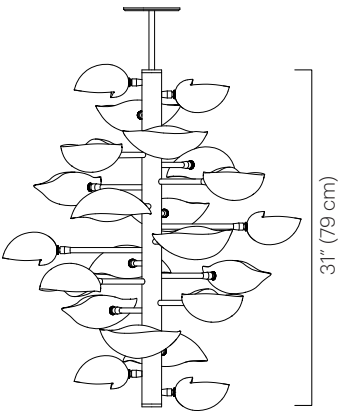

26.5" (67 cm) approx. diameter



Description

The Lapa is a balanced fixture comprised of 22 shell shades. Each shade is hand-formed in our Brooklyn studio, and can rotate 320° to cast light directionally.

Materials

Frame: Plated steel
Shades: Powder coated aluminum
Drop: Plated steel

Shade Color

- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- Black Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Frame Color

- Brushed Brass
- Polished Nickel

Custom finishes available.

Lamping

120V: (22)G16.5 globe bulb
candelabra base 15W max
220-240V: (22)E14 base golf ball
15W max
Note: Bulbs not included.
Halogen bulbs not recommended.

Wattage

330W max

Weight

25 lbs (11.5 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Ceiling mount consistent with
shade color.
Arm lengths not adjustable.
Additional weight support
recommended for junction
box installation.
Indoor use and dry locations only.

Dimensions

26.5" Dia x 31" H
(67 Dia x 79 cm H)
Minimum overall height: 34"
(86cm)
Shell Shade (approx.):
3.5" H x 9" W x 6" D
(9 H x 23 W x 15 cm D)




Whiplash Collection

Taking its name from the sinuous lines which came to define the art nouveau era, the Whiplash Collection repurposes this ornamental flourish as a functional form with signature minimalism and ease.

Whiplash Table Lamp

TECHNICAL SPECIFICATIONS

No. 122

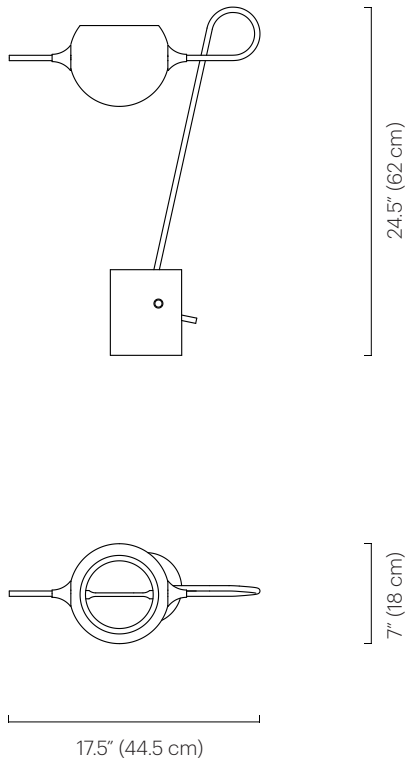

Description

The Whiplash Desk Lamp features a cylindrical cement cast base. The hand formed brass arm is secured by a brass dowel. The fixture has a single glass Whiplash shade, each shade is hand blown and illuminated by a dimmable LED. Shade can be faced up or down, specify shade orientation.

Materials

Shade: Glass
Base: Cement
Frame: Plated brass
Hardware: Plated and polished brass

Shade Color

- White Ombre
- Black Ombre

Base Color

- Natural Cement
- Darkened Cement

Finish

- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 700 (equivalent to one 60W incandescent bulb)
CRI: 90+
70,000 LED life hours (approx.)

Voltage / Wattage

24V / 7W

Weight

11 lbs (5 kg)

Remarks

Shade does not rotate after install. Specify shade orientation.
Cord color is black; length approx. 7 feet.
Dimmer switch located on cord. Indoor use and dry locations only.

Dimensions

Fixture dimensions:
24.5"L x 7" W x 17.5"H
(62 L x 18 W x 44 cm H)
Shade: 7" Ø x 6" H
(18 Ø x 15 cm H)





460 Whiplash Pendant
White Ombre + Oil Rubbed Bronze

Whiplash Pendant

TECHNICAL SPECIFICATIONS

No. 460

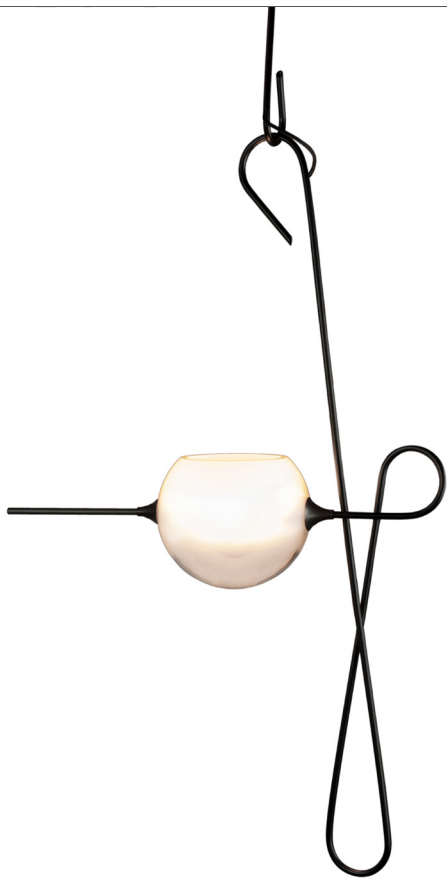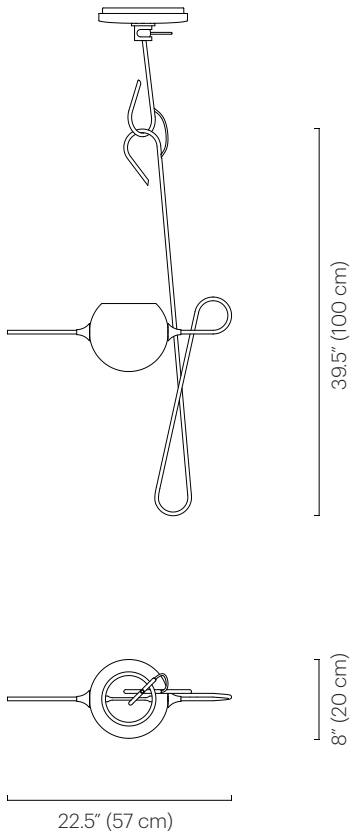

Description

The Whiplash Pendant is a balanced fixture on an asymmetrical axis, which allows gentle movement. The fixture has one glass Whiplash shade, each shade is hand blown and illuminated by a dimmable LED. The fixture can rotate 245° from the canopy.

Materials

Shade: Glass
Ceiling mount: Powder coated aluminum and steel.
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Shade Color

- White Ombre
- Black Ombre

Ceiling Mount Color

- Black Satin
- White Satin

Custom colors available.

Finish

- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 700 (equivalent to one 60W incandescent bulb)
CRI: 90+
70,000 LED life hours (approx.)

Power Supply

10W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: dimmable Class 2 included in canopy.

Dimmer Compatibility

For 120V areas: 0-10V, TRIAC, ELV dimmable
For 220-240V areas: 0-10V, ELV (only at 230V) dimmable

Voltage / Wattage

24V / 7W

Weight

8 lbs (3.5 kg)

Remarks

Each fixture is handmade and therefore may vary up to 2" in overall height due to the counterbalancing nature.

Remarks Continued

Specify drop length.
Arm and frame lengths are fixed. Fixed drop not adjustable on site. Shade does not rotate. Specify shade orientation. Not for use on sloped ceilings. Black exterior electrical cord is standard. Hardware finish consistent with frame finish. Specify ceiling mount color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions


Fixture dimensions:
22.5" L x 8" W x 39.5" H
(57 L x 20 W x 100 cm H)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Minimum overall height: 49.5" (126 cm)
Shade: 8" Ø x 7" H
(20 Ø x 18 cm H)



Whiplash Tiered Pendant, 2 Tier

TECHNICAL SPECIFICATIONS

No. 461

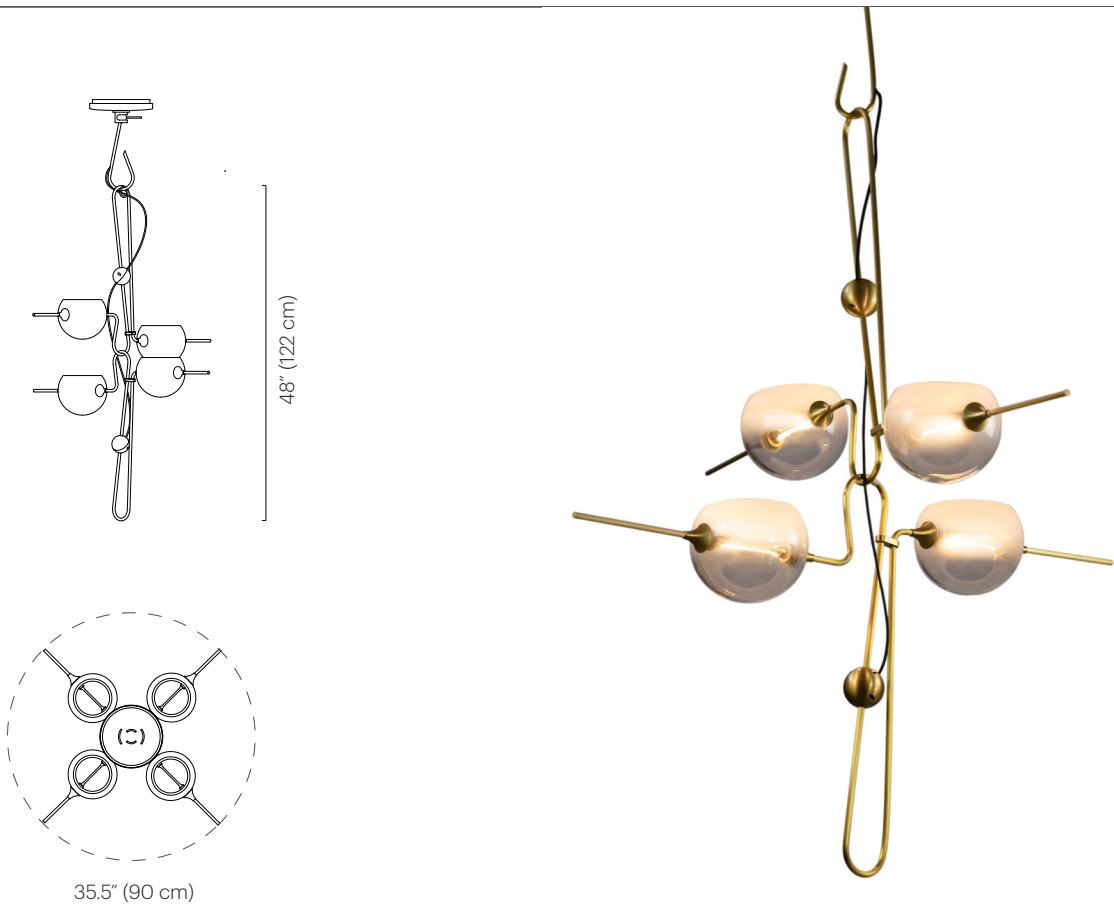

Description

The Whiplash Tiered Pendant is a balanced fixture comprised of asymmetrical curves. The fixture has four glass Whiplash shades, each shade is hand blown and illuminated by a dimmable LED. The fixture can rotate 245° from the canopy.

Materials

Shade: Glass
Ceiling mount: Powder coated aluminum and steel.
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Shade Color

- White Ombre
- Black Ombre

Ceiling Mount Color

- Black Satin
- White Satin

Custom colors available.

Finish

- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 2800 (equivalent to four 60W incandescent bulb)
CRI: 90+
70,000 LED life hours (approx.)

Power Supply

40W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: dimmable Class 2 included in canopy.

Dimmer Compatibility

For 120V areas: 0-10V, TRIAC & ELV dimmable
For 220-240V areas: 0-10V dimmable

Voltage / Wattage

24V / 28W

Weight

20 lbs (9 kg)

Remarks

Each fixture is handmade and therefore may vary up to 2" in overall height due to the counterbalancing nature.

Remarks Continued

Specify drop length.
Arm and frame lengths are fixed. Fixed drop not adjustable on site.
Shade does not rotate. Specify shade orientation.
Not for use on sloped ceilings. Black exterior electrical cord is standard.
Hardware finish consistent with frame finish. Specify ceiling mount color. Additional weight support recommended for junction box installation.
Indoor use and dry locations only. Five tier maximum.

Dimensions

Fixture diameter: 35.5" (90 cm)
Fixture height: 48" (122 cm)
Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H)
Minimum overall height: 58.5" (149 cm)
Shade: 7" Ø x 6" H (18 Ø x 15 cm H)

461 Whiplash Tiered Pendant 2 Tier
White Ombre + Brushed Brass




461 Whiplash Tiered Pendant 3 Tier
White Ombre + Brushed Brass

Whiplash Tiered Pendant, 3 Tier

TECHNICAL SPECIFICATIONS

No. 461

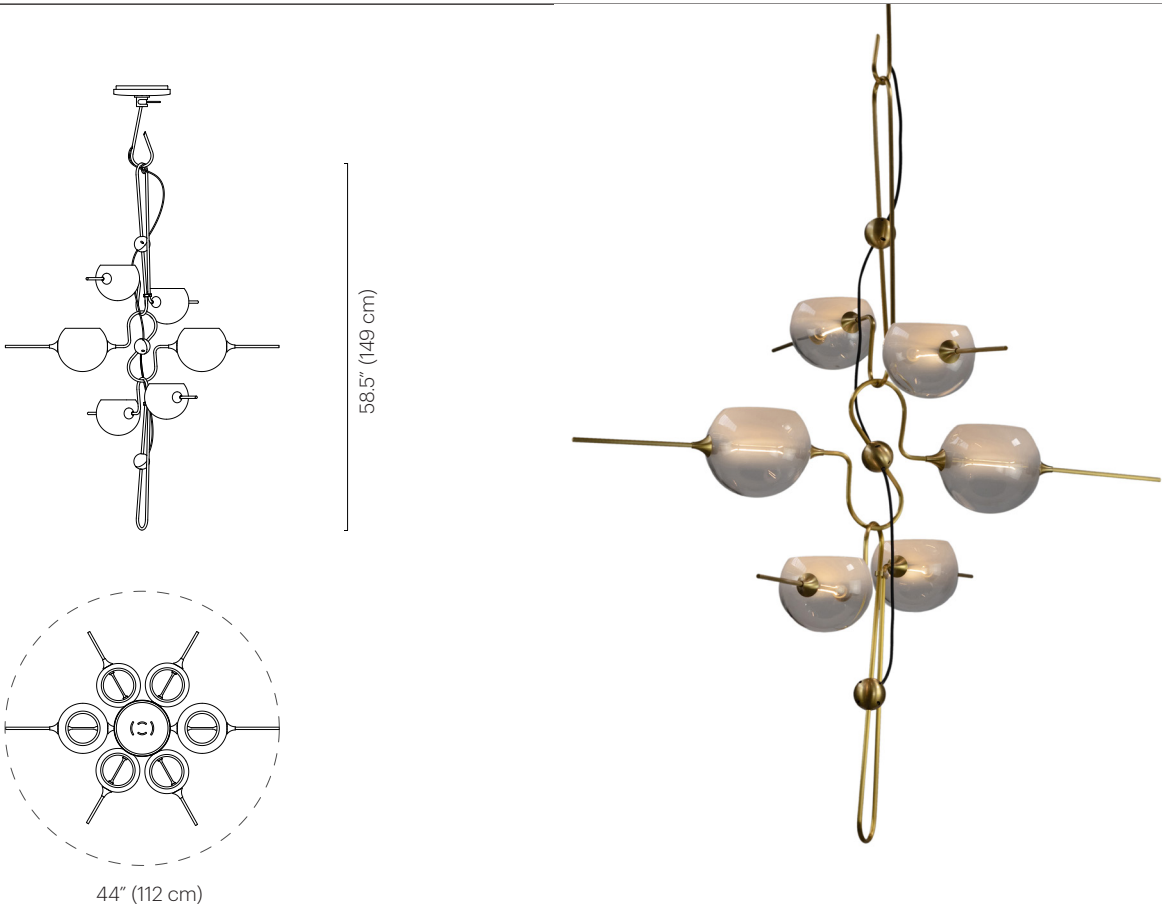

Description

The Whiplash Tiered Pendant is a balanced fixture comprised of asymmetrical curves. The fixture has six glass Whiplash shades, each shade is hand blown and illuminated by a dimmable LED. The fixture can rotate 245° from the canopy.

Materials

Shade: Glass
Ceiling mount: Powder coated aluminum and steel.
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Shade Color

○ White Ombre
● Black Ombre

Ceiling Mount Color

● Black Satin
○ White Satin

Custom colors available.

Finish

● Brushed Brass
● Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 4200 (equivalent to six 60W incandescent bulb)
CRI: 90+
70,000 LED life hours (approx.)

Power Supply

40W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V dimmable Class 2 included in canopy.

Dimmer Compatibility

For 120V areas: 0-10V, TRIAC & ELV dimmable
For 220-240V areas: 0-10V dimmable

Voltage / Wattage

24V / 39W

Weight

30 lbs (13.5 kg)

Remarks

Each fixture is handmade and therefore may vary up to 2" in overall height due to the counterbalancing nature. Specify drop length. Arm and frame lengths are fixed. Fixed drop not adjustable on site. Shade does not rotate.

Remarks Continued

Specify shade orientation. Not for use on sloped ceilings. Black exterior electrical cord is standard. Hardware finish consistent with frame finish. Specify ceiling mount color. Additional weight support recommended for junction box installation. Indoor use and dry locations only. Five tier maximum.

Dimensions

Fixture diameter: 44" (112 cm)
Fixture height: 58.5" (149 cm)
Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H)
Minimum overall height: 69" (175 cm)
Small Shade: 7" Ø x 6" H (18 Ø x 15 cm H)
Large Shade: 8" Ø x 7" H (20 Ø x 18 cm H)




462 Whiplash Chain Pendant
White Ombre + Brushed Brass

Whiplash Chain Pendant

TECHNICAL SPECIFICATIONS

No. 462

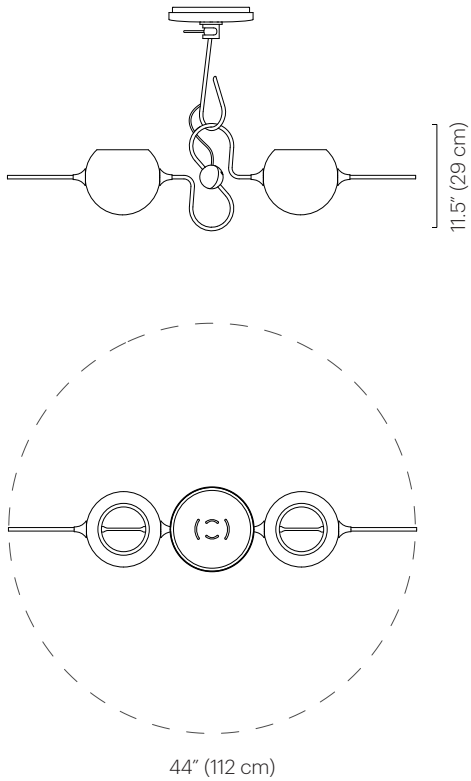

Description

The Whiplash Chain Pendant is a balanced fixture on an asymmetrical axis, which allows gentle movement. The fixture has two glass Whiplash shades, each shade is hand blown and illuminated by a dimmable LED. The fixture can rotate 245° from the canopy.

Materials

Shade: Glass
Ceiling mount: Powder coated aluminum and steel.
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Shade Color

- White Ombre
- Black Ombre

Ceiling Mount Color

- Black Satin
- White Satin

Custom colors available.

Finish

- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 1400 (equivalent to two 60W incandescent bulb)
CRI: 90+
70,000 LED life hours (approx.)

Power Supply

20W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: dimmable Class 2 included in canopy.

Dimmer Compatibility

For 120V areas: 0-10V, TRIAC & ELV dimmable
For 220-240V areas: 0-10V, EVL (only at 230V) dimmable

Voltage / Wattage

24V /14W

Weight

10 lbs (4.5 kg)

Remarks

Each fixture is handmade and therefore may vary up to 2" in overall height due to the counterbalancing nature.

Remarks Continued

Specify drop length.
Arm and frame lengths are fixed. Fixed drop not adjustable on site. Shade does not rotate. Specify shade orientation. Specify number of tiers. Five tier maximum. Each tier has two shades. Not for use on sloped ceilings. Black exterior electrical cord is standard. Hardware finish consistent with frame finish. Specify ceiling mount color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.


Dimensions

Fixture diameter: 44" (112 cm)
Fixture height: 11.5" (29 cm)
Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H)
Minimum overall height: 24" (61 cm)
Shade: 8" Ø x 7" H (20 Ø x 18 cm H)

Whiplash Chain Pendant, 3 Tier

TECHNICAL SPECIFICATIONS

No. 462

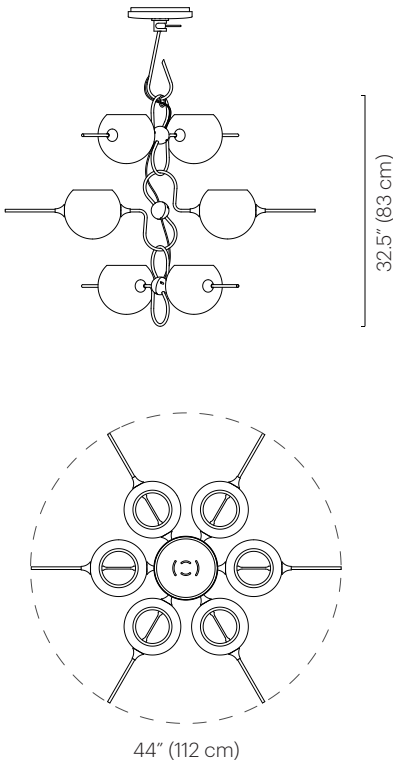

Description

The Whiplash Chain Pendant is a balanced fixture comprised of linked curves. The fixture has six glass Whiplash shades, each shade is hand blown and illuminated by a dimmable LED. The fixture can rotate 245° from the canopy. The quantity of the tiers can be specified.

Materials

Shade: Glass
Ceiling mount: Powder coated aluminum and steel.
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Shade Color

- White Ombre
- Black Ombre

Ceiling Mount Color

- Black Satin
- White Satin

Custom colors available.

Finish

- Brushed Brass
- Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 4200 (equivalent to six 60W incandescent bulb)
CRI: 90+
70,000 LED life hours (approx.)

Power Supply

40W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: dimmable Class 2 included in canopy.

Dimmer Compatibility

For 120V areas: 0-10V, TRIAC & ELV dimmable
For 220-240V areas: 0-10V dimmable

Voltage / Wattage

24V / 39W

Weight

30 lbs (13.5 kg)

Remarks

Each fixture is handmade and therefore may vary up to 2" in overall height due to the counterbalancing nature. Specify drop length. Arm and frame lengths are fixed. Fixed drop not adjustable on site.

Remarks Continued

Shade does not rotate. Specify shade orientation. Specify number of tiers. Five tier maximum. Each tier has two shades. Not for use on sloped ceilings. Black exterior electrical cord is standard. Hardware finish consistent with frame finish. Specify ceiling mount color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

Dimensions

Fixture diameter: 44" (112 cm)
Fixture height: 32.5" (83 cm)
Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H)
Minimum overall height:
Three Tier: 43" (109 cm)
Two Tier: 34" (86 cm)
Single Tier: 24" (61 cm)
Shade: 8" Ø x 7" H (20 Ø x 18 cm H)

David Weeks Studio works alongside architects, interior designers, and private clients to construct experience and define space with singular expression.

Our made-to-order production process allows us to offer customizations on much of our lighting collections. Our team will be happy to guide you through the process and estimate any project, whether you're looking for made-to-measure dimensions or a custom color statement. The studio offers a full custom design service that extends beyond the scope of our existing collections. Please contact our sales department for more details.

Call us at (212) 966 3433

Email us at sales@davidweeksstudio.com

Follow us [@davidweeksstudio](https://www.instagram.com/davidweeksstudio)

Find out more at www.davidweeksstudio.com

David Weeks Studio